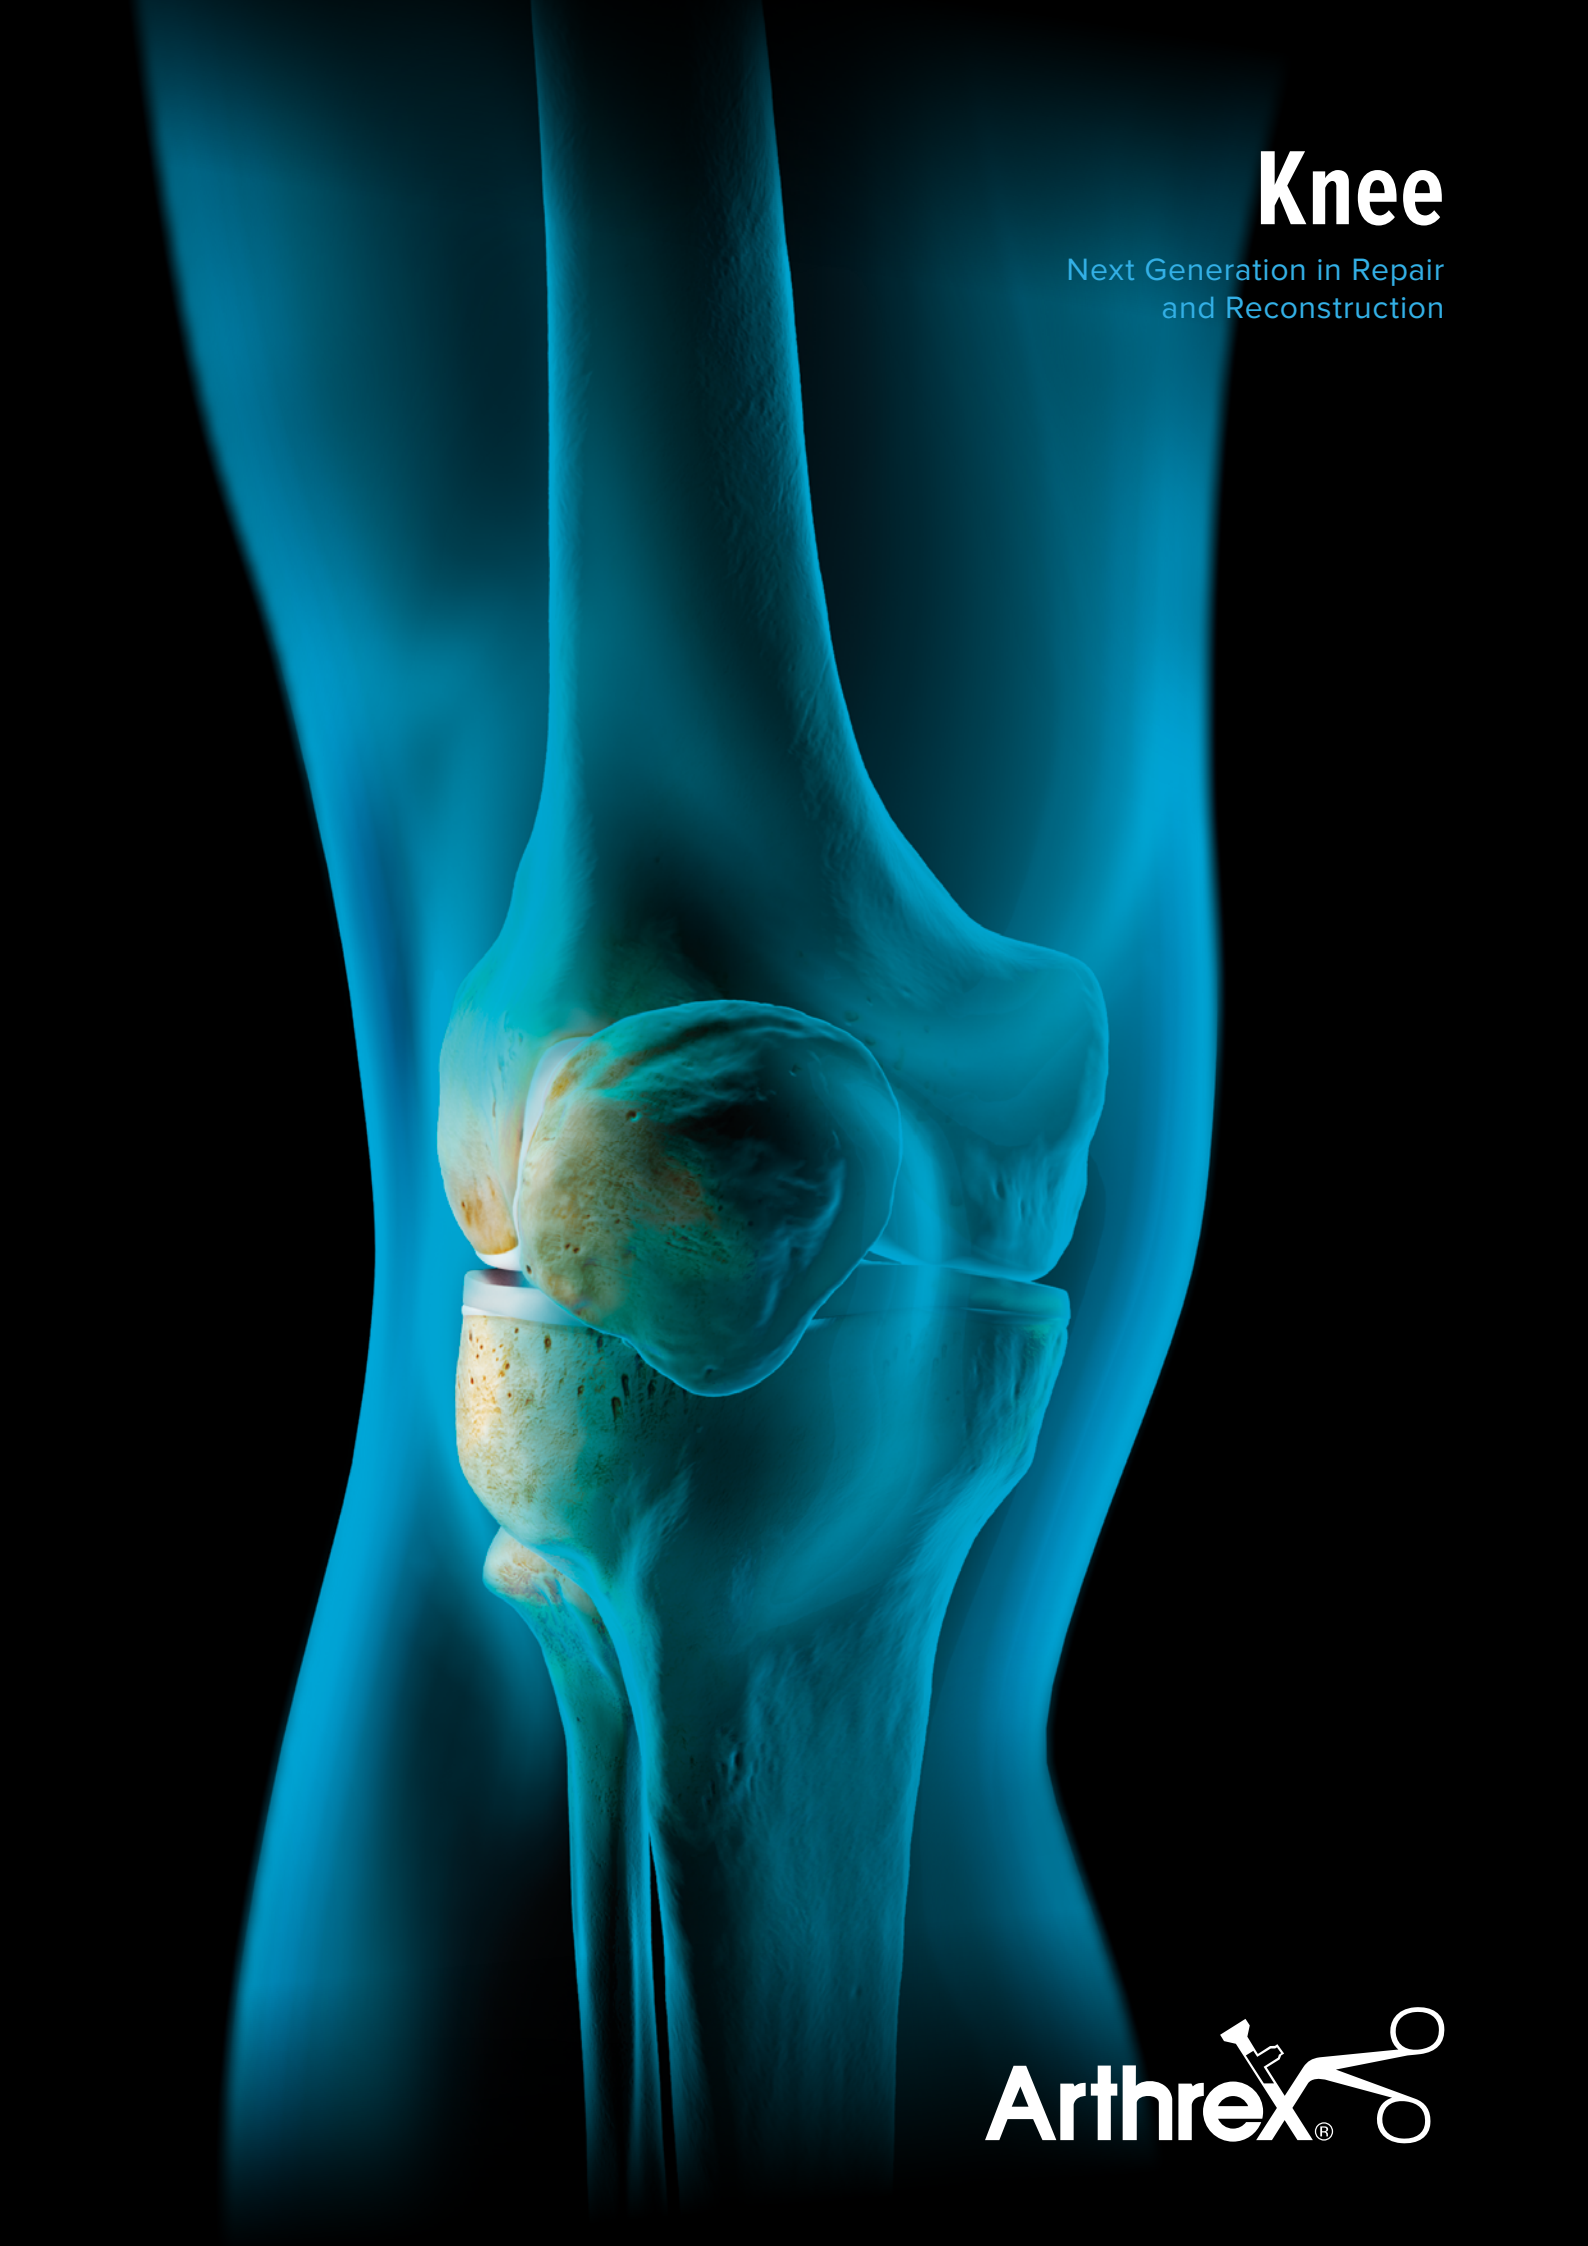


Knee

Next Generation in Repair
and Reconstruction

Arthrex®

Helping Surgeons Treat Their Patients Better®

Since its inception, Arthrex has been committed to one mission: Helping Surgeons Treat Their Patients Better. We are strategically focused on constant product innovation through scientific research, surgeon collaboration, and medical education to make less invasive surgical procedures simple, safer, and more reproducible. Each year, we develop more than 1000 new innovative products and procedures to advance minimally invasive orthopedics worldwide.

Arthrex has always remained a privately held company, which allows for the rapid evaluation of new technologies and ideas and the freedom to develop products and techniques that truly make a difference. Our experienced team of dedicated professionals represents a shared passion and commitment to delivering uncompromising quality to the health care providers who use our products and the millions of patients whose lives we impact.

The medical significance of our contributions serves as our primary benchmark of success and will continue into the future as the legacy of Arthrex.

Table of Contents

Patient Positioning 05

ACL Repair 09

ACL Reconstruction 13

Tunnel and Socket Preparation and Drilling 17

ACL/PCL Accessories 27

Graft Harvesting 31

FiberWire® Suture 37

Graft Prep, Sizing, and Pretensioning 43

Graft Fixation 47

Screw Insertion and Removal 61

PCL Reconstruction 65

Collateral Ligament Reconstruction and Repair 69

Patellofemoral Procedures 75

Meniscal Repair 81

Meniscectomy Hand Instruments 89

Cartilage Regeneration 93

Osteochondral Repair 97

Osteochondral Transplant 103

Osteotomies 107

Patient Positioning

PivotPost 06
Low-Profile Leg Holders 07

PivotPost



The PivotPost is a limb positioner with a lateral post that moves in 3 planes (rotation, in/out, up/down) to easily place the patient in the proper position and to pivot out of the way when not in use. The unique over-the-top sweeping design prevents the patient's leg from moving over the post when valgus stress or a figure 4 is applied. The small size and minimal weight makes set-up simple and allows surgeons to operate around it easily.

Product description	Item number
PivotPost	AR-**1560**
Knee post only	AR-**1560-02**
Clark rail adapter only	AR-**1560-03**
Foam pads	AR-**1560-01**







Low-Profile Leg Holders



The low-profile leg holder with its Velcro fastener for integration of pressure tourniquets or foam inserts provides maximum patient safety while still allowing adaptation of the thigh circumference. The low-profile leg holder is delivered with a post to mount onto clark rails.


Product description	Item number
Leg holder, with Velcro fastener	AR-**1500G***
Foam cushion insert, for AR-1500G	AR-**1502**
Replacement buckle	AR-**1500B**
Replacement Velcro fastener	AR-**1500-10**

* Post is compatible with standard rail adapters

ACL Repair

ACL Repair TightRope® System 10

ACL Repair TightRope® System

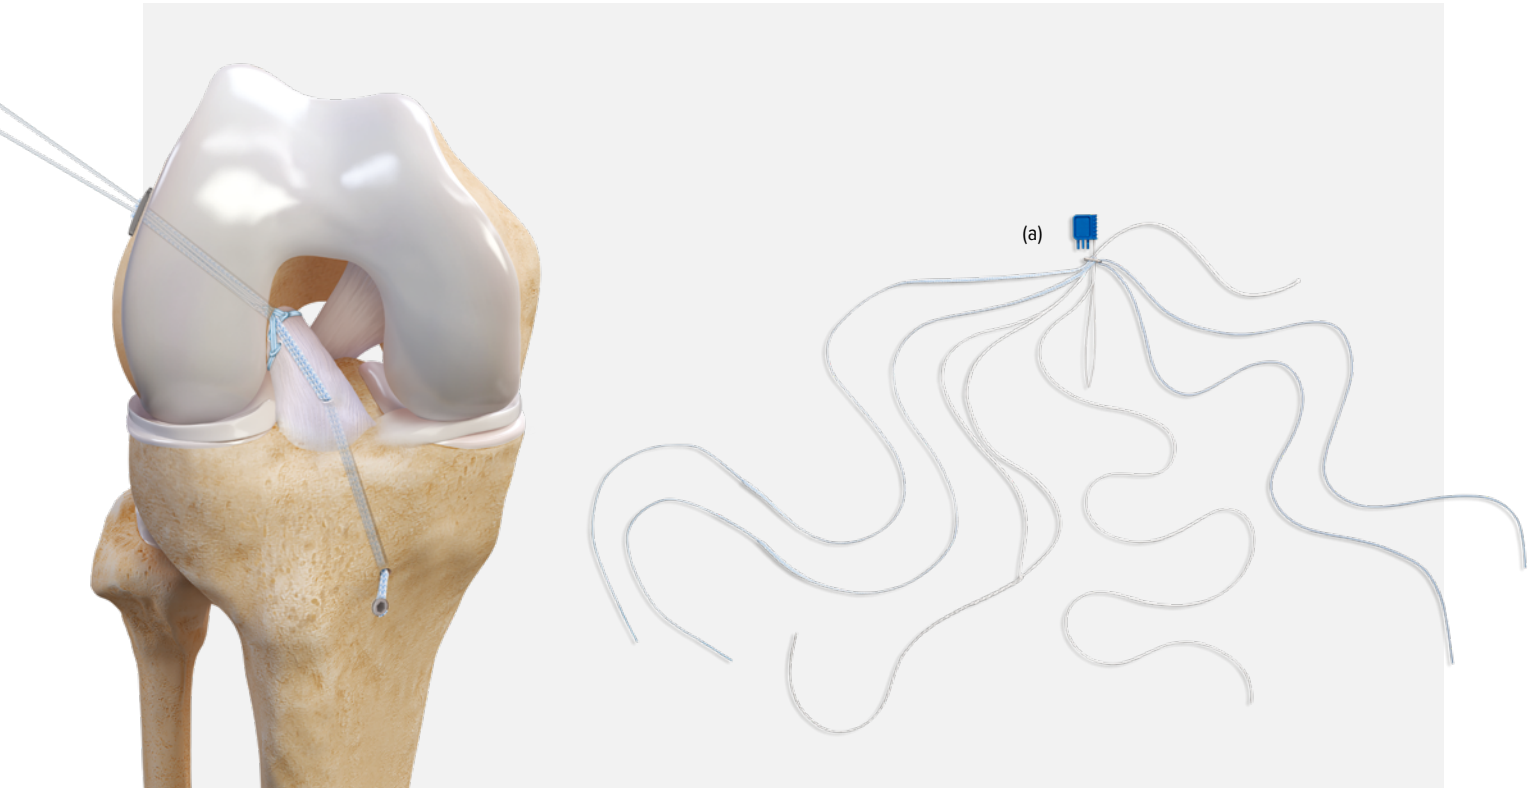


The ACL Repair TightRope system is the first knotless, tensionable system designed for ACL primary repair. This implant comes preassembled with a FiberTape suture for the *Interna*lBrace technique. The system uses FiberRing sutures to stitch the torn ligament tissue. The FiberRing sutures are then connected to the ACL Repair TightRope implant, enabling precise tensioning and retensioning of the ligament after cycling the leg. FiberRing sutures are available in multiple sizes to accommodate various stitching techniques.

Product description	Item number
ACL Repair TightRope® implant with FiberTape® suture for *Interna*lBrace™ technique **(a)**	AR-**1588R-IB**
ACL button for the *Interna*lBrace™ technique	AR-**1588TB-IB**
FiberRing™ suture with shuttle loop, 25 mm **(b)**	AR-**7282-25**
FiberRing™ suture with shuttle loop, 35 mm **(c)**	AR-**7282-35**
FiberRing™ suture with shuttle loop, 45 mm **(d)**	AR-**7282-45**
FiberRing™ suture with shuttle loop, 55 mm **(e)**	AR-**7282-55**
2.4 mm cannulated dril and SutureLasso™ SD wire loop **(f)**	AR-**1594D-24**

Additional Products


Product description	Item number
FlipCutter® III drill	AR-**1204FF**
RetroConstruction™ drill guide system instrument	AR-**1510S**
ACL ToolBox instrument set	AR-**1900S**

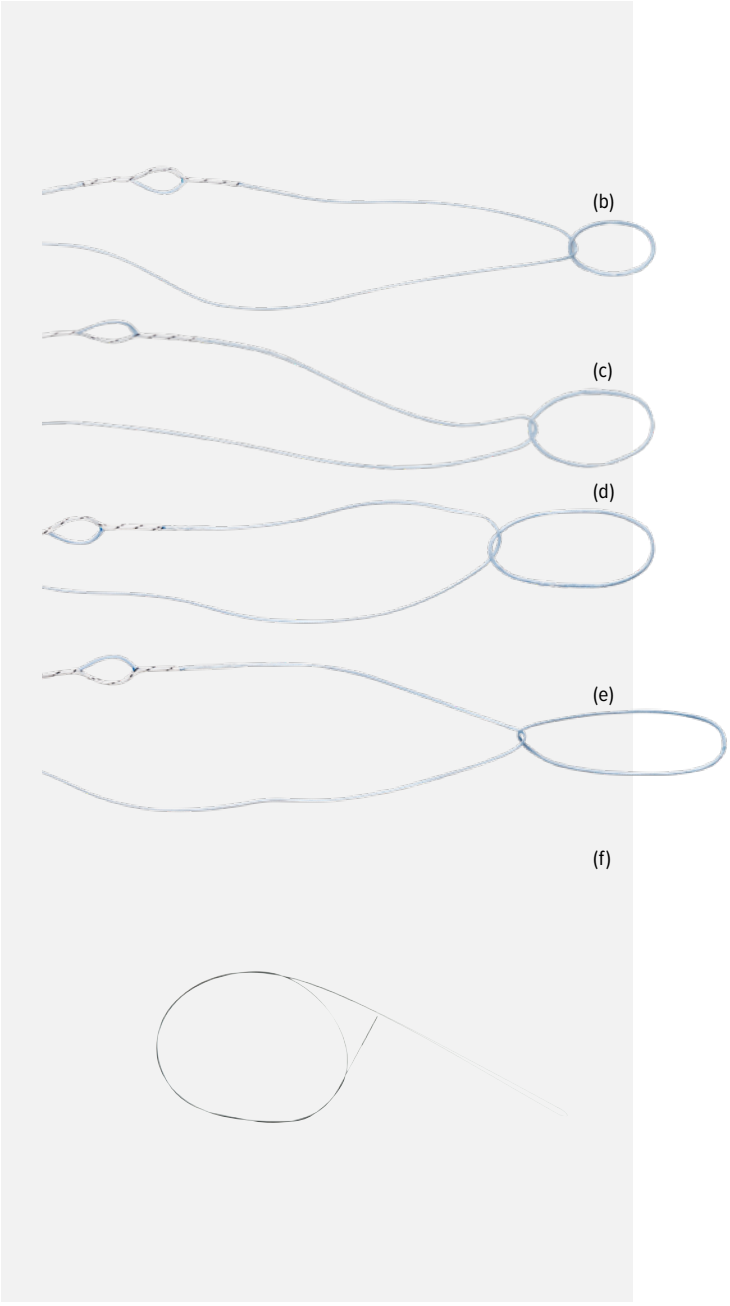
(b)
(c)
(d)
(e)
(f)

ACL Reconstruction

ACL ToolBox Instrumentation Set..... 14

ACL ToolBox Instrumentation Set

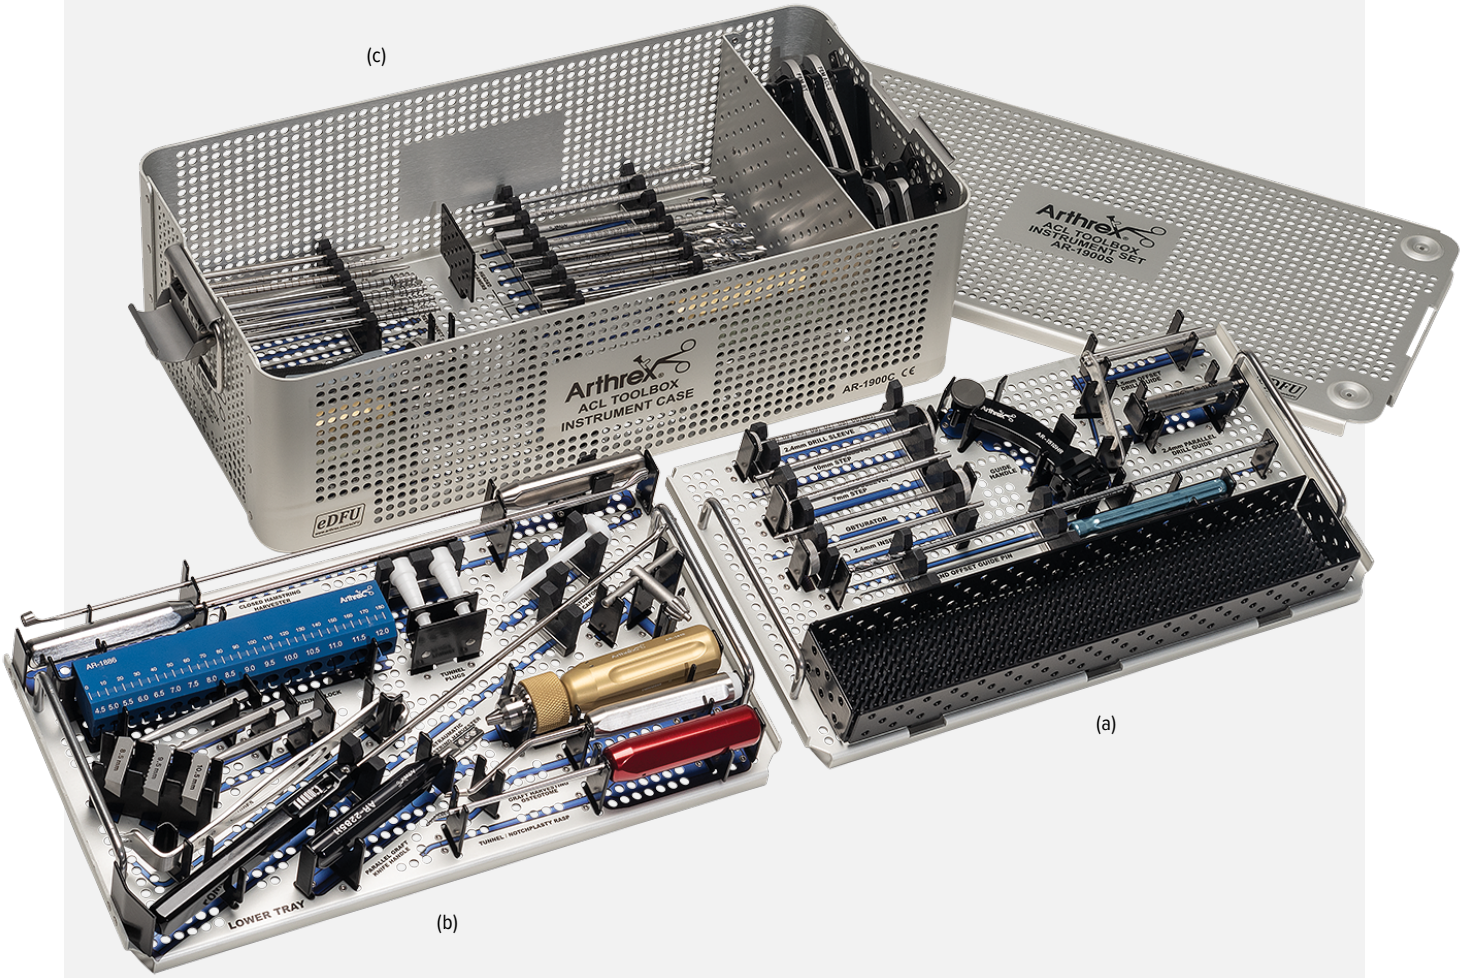

The ACL ToolBox fits the needs of most modern ACL reconstructions. The streamlined, 3-layer case contains all the reusable instruments necessary for completing most common ACLR procedures and includes an open “pin mat” area for additional instruments. The toolbox contains the RetroConstruction drill guide set with commonly used ACL marking hooks. Multiple drill sleeves are included for all techniques and can be used with standard 2.4 mm pins, 3 mm RetroDrill pins, and 3.5 mm FlipCutter reamers.

ACL ToolBox Instrumentation Case (AR-1900)

Product description	Item number
First Level of Tray **(a)**	
Hook probe, 3.4 mm tip, with 5 mm marking	AR-**10010**
Side-release RetroConstruction™ handle	AR-**1510HR**
Ratchet drill sleeve, 2.4 mm	AR-**1510FD-24**
Stepped, ratchet drill sleeve, 7 mm step	AR-**1510FS-7**
Stepped, ratchet drill sleeve, 10 mm step	AR-**1204FDS-10**
Obturator, 3.5 mm	AR-**1204F-OB**
Insert, 2.4 mm	AR-**1204F-24I**
Parallel guide sleeve, 2.4 mm pins	AR-**1245L**
Offset drill guide, 3.5 mm	AR-**1246-1**
Offset drill guide, 3.5 mm pins	AR-**1246-3**
Drill tip guide pin, 3.5 mm	AR-**1250F**
Second Level of Tray **(b)**	
Semitendinosus stripper, closed end, 7 mm	AR-**1278L**
Pigtail hamstring tendon stripper, open end, 7 mm	AR-**1278PL**
Atraumatic hamstring harvester	AR-**10300**
Graft sizing block, 4.5-12 mm holes (0.5 mm increments)	AR-**1886**
Tunnel plug for 8-12 mm drill holes	AR-**1258**
Reusable obturator for tibial tunnel cannula	AR-**1807**
Graft harvesting cutting guides, 8.5 mm	AR-**1809**
Graft harvesting cutting guides, 9.5 mm	AR-**1810**
Graft harvesting cutting guides, 10.5 mm	AR-**1811**
Graft harvesting retractor	AR-**1420**
Chuck key	AR-**8241**
Jacob´s chuck handle	AR-**1415**
Parallel graft knife handle	AR-**2285H**
Notchplasty and graft harvesting osteotome, 5 mm	AR-**1830**
Tunnel/notchplasty rasp	AR-**1282**

Third Level of Tray **(c)**	
Femoral ACL marking hook, curved	AR-**1510F-01**
Footprint femoral ACL guide, left	AR-**1510FL**
Footprint femoral ACL guide, right	AR-**1510FR**
Tibial ACL marking hook for RetroConstruction™ drill	AR-**1510T**
Tunnel notcher	AR-**1844**
Transportal ACL guide, 6 mm offset	AR-**1800-06**
Transportal ACL guide, 7 mm offset	AR-**1800-07**
Transtibial femoral ACL drill guide, 6 mm	AR-**1804**
Transtibial femoral ACL drill guidee, 7 mm	AR-**1801**
Cannulated drill, 8 mm	AR-**1208L**
Cannulated drill, 9 mm	AR-**1209L**
Cannulated drill, 10 mm	AR-**1214L**
Cannulated drill, 11 mm	AR-**1217L**
Cannulated headed reamer, 8 mm	AR-**1408**
Cannulated headed reamer, 9 mm	AR-**1409**
Cannulated headed reamer, 10 mm	AR-**1410**
Cannulated headed reamer, 11 mm	AR-**1411**
SlapDriver, quick connect, ratcheting handle	AR-**1999SD**
FastThread™ screw tap, 7 mm quick connect	AR-**4020T-07**
FastThread™ screw tap, 8 mm quick connect	AR-**4020T-08**
FastThread™ screw tap, 9 mm quick connect	AR-**4020T-09**
FastThread™ screw tap, 10 mm quick connect	AR-**4020T-10**
Quick connect BioComposite interference screwdriver	AR-**1996CD-1**
FastThread™ screwdriver for 6 mm-diameter, quick connect (trilobe)	AR-**4019D-1**
Cannulated screwdriver shaft, 3.5 mm hex, Ø5.5 mm × 17 cm	AR-**1988**

* Not included in set. Order separately.

Tunnel and Socket Preparation and Drilling

FlipCutter® III Drill 18
RetroConstruction™ Drill Guide Set 19
Transportal ACL Guides 20
Transtibial Femoral Guides 20
Low-Profile Reamers 21
Cannulated Headed Reamers 21
Guide Pins 22
Cannulated and Sterile Cannulated Drill 23
Coring Reamers 23
Tunnel Dilators 24
Notchplasty 25

FlipCutter® III Drill




The innovative FlipCutter III drill is an adjustable, variable-size, all-in-1 guide pin and reamer that allows minimally invasive inside-out socket creation. Arthrex's proprietary FlipCutter technology allows unconstrained freedom of socket positioning and is ideal for difficult-to-reach applications such as tibial socket creation for PCL reconstruction, anatomic femoral socket creation for ACL reconstruction, and socket creation for meniscal allograft transplantation or meniscal root repair. This single device drills size 6 mm and sizes 7 to 12 mm, including half sizes.

Product description	Item number
FlipCutter® III drill, 6-12 mm (including half sizes, except 6.5 mm)	AR-**1204FF**

The short FlipCutter II reamer decreases the distance surgeons must reach while drilling, enabling more control and accuracy. Together with the side-release RetroConstruction handle, the short FlipCutter II reamer makes anatomic, minimally-invasive drilling easier than ever.

Product description	Item number
FlipCutter® II, short, 5-13 mm Diameter: 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 13 mm	AR-**1204AS-50** to -**130**
FlipCutter® II, 6-13 mm Diameter: 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 13 mm	AR-**1204AF-60** to -**130**

RetroConstruction™ Drill Guide Set

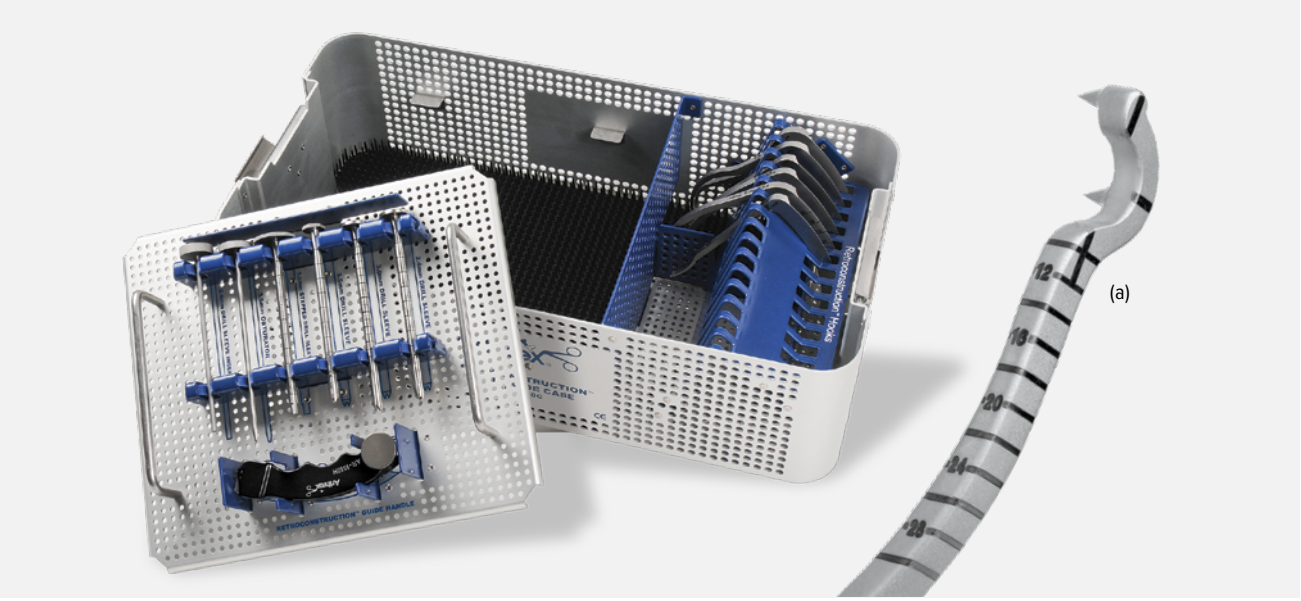

The small, easy-to-use RetroConstruction drill guide set accommodates up to 14 marking hook options for multiple applications. The adjustable C-ring allows several drilling angles without sacrificing accuracy. Multiple drill sleeves accommodate retrograde reaming with the FlipCutter reamer and antegrade reaming with standard 2.4 mm pins. The additional stepped drill sleeve acts as a depth stop for retrograde drilling and maintains joint access during reamer removal for insertion of graft-passing sutures.

RetroConstruction™ Drill Guide Set (AR-1510S)

Product description	Item number
RetroConstruction™ drill guide handle	AR-**1510H**
RetroConstruction™ drill guide handle, side release	AR-**1510HR**
FlipCutter® drill sleeve, ratcheting, stepped, 3.5 mm	AR-**1510FS-7**
Drill sleeve, for RetroConstruction™ drill guide, stepped, 7 mm long tip, 3.5 mm	AR-**1204FDS**
Drill sleeve, for RetroConstruction™ drill guide, stepped, 10 mm long tip, 3.5 mm	AR-**1204FDS-10**
Drill sleeve, ratcheting, 3.5 mm	AR-**1510FD-35**
Drill sleeve, ratcheting, 3 mm	AR-**1510FD-30**
Drill sleeve, ratcheting, 2.4 mm	AR-**1510FD-24**
Drill sleeve, for RetroConstruction™ drill guide, 3.5 mm	AR-**1510D**
Drill sleeve, for RetroConstruction™ drill guide, 3 mm	AR-**1778R-30**
Drill sleeve, for RetroConstruction™ drill guide, 2.4 mm	AR-**1778R-24**
Obturator, 3.5 mm	AR-**1204F-OB**
Guide pin sleeve, 2.4 mm	AR-**1204F-24I**
Tibial ACL marking hook, for RetroConstruction™ drill guide	AR-**1510T**
Tibial ACL marking hook, blunt preservative, right	AR-**1510TR**
Tibial ACL marking hook, blunt preservative, left	AR-**1510TL**
Femoral ACL marking hook, for RetroConstruction™ drill guide	AR-**1510F**
Femoral ACL marking hook, curved	AR-**1510F-01**
PCL tibial marking hook, for RetroConstruction™ drill guide	AR-**1510PT**
Femoral PCL marking hook, for RetroConstruction™ drill guide	AR-**1510PF**
Reusable marking hook, for RetroConstruction™ drill guide	AR-**1510M**
Popliteus marking hook, tibia	AR-**1510PT-1**
RetroConstruction™ drill guide system case	AR-**1510C**

Accessories

Product description	Item number
Guide pin, with drill thread, 3.5 mm (predrill pin for FlipCutter®)	AR-**1250F**
Tibial ACL drill guide, pin tip	AR-**1510GT**
Tibial ACL marking hook, with guide pin, small angle	AR-**1510GTS**
Femoral ACL footprint drill guide, left	AR-**1510FL**
Femoral ACL footprint drill guide, right **(a)**	AR-**1510FR**
Femoral ACL footprint drill guide, with 7 mm offset, left	AR-**1510FPL**
Femoral ACL footprint drill guide, with 7 mm offset, right	AR-**1510FPR**
Femoral ACL footprint drill guide, small angle, left	AR-**1510FLS**
Femoral ACL footprint drill guide, small angle, right	AR-**1510FRS**
Femoral ACL hook, for outside-in technique	SP-**1510F-02**
Femoral RetroConstruction™ drill guide, AM portal, left	AR-**1510FL-01**
Femoral ACL RetroConstruction™ drill guide, AM portal, right	AR-**1510FR-01**
Anatomic contour PCL guide, left	AR-**1510PTL**
Anatomic contour PCL guide, right	AR-**1510PTR**
Popliteus marking hook, tibia	AR-**1510PT-1**

Transportal ACL Guides



The transportal ACL guides (TPGs) were designed specifically for the anteromedial portal approach and allow surgeons freedom in femoral socket placement, while maintaining appropriate back wall thickness. The open-angled offset tip allows reproducible back wall thickness and facilitates anterior trajectory of the guide pin. The longer tip stabilizes the guide over the posterior cortex during hyperflexion.

Product description	Item number
Transportal ACL guide, 4-8 mm Offset: 4, 5, 6, 7, 8 mm	AR-**1800-04** to -**08**

Transtibial Femoral Guides




The transtibial femoral ACL drill guides allow precise placement of femoral tunnels by referencing the over-the-top position. Five sizes (4, 5, 6, 7, and 8 mm offsets) create a 1-2 mm tunnel back wall when used with an appropriately sized drill.

Product description	Item number
Transtibial femoral ACL drill guide, 4 mm, for 6-7 mm tunnels	AR-**1806**
Transtibial femoral ACL drill guide, 5 mm, for 7-8 mm tunnels	AR-**1803**
Transtibial femoral ACL drill guide, 6 mm	AR-**1804**
Transtibial femoral ACL drill guide, 7 mm	AR-**1801**
Transtibial femoral ACL drill guide, 8 mm, for 10-11 mm tunnels	AR-**1805**

Guide pin available sterile in the transtibial ACL disposables kit


Low-Profile Reamers

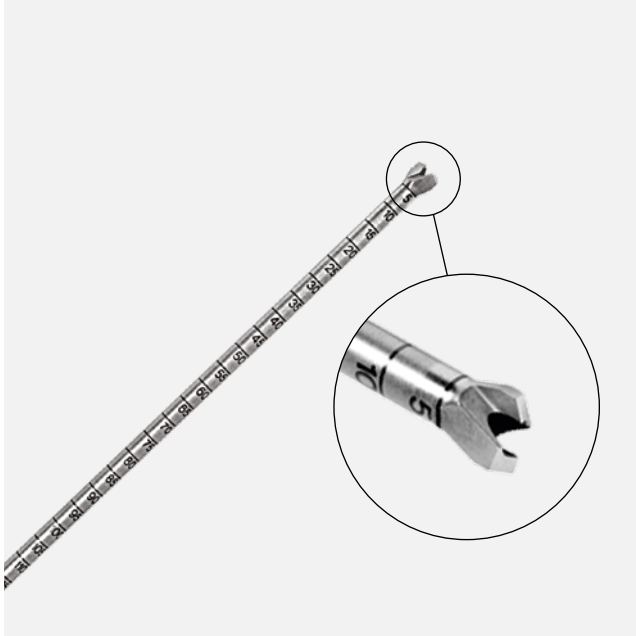

Low-profile reamers facilitate femoral socket preparation through the medial portal and allow more flexibility in femoral socket placement for transtibial procedures. The drill's extra thin shaft and "2-flute" design provides a flat profile that easily passes through the portal and avoids damaging the femoral condyle and PCL.

Product description	Item number
Headed reamers, low profile, 5-13 mm Diameter: 5, 6, 7, 8, 9, 10, 11, 12, 13 mm	AR-**1405LP** to -**1413LP**
Headed reamers, low profile, 5.5-12.5 mm Diameter: 5.5, 6.5, 7.5, 8.5, 9.5, 10.5, 11.5, 12.5 mm	AR-**1405LP-50** to -**1412LP-50**


Cannulated Headed Reamers

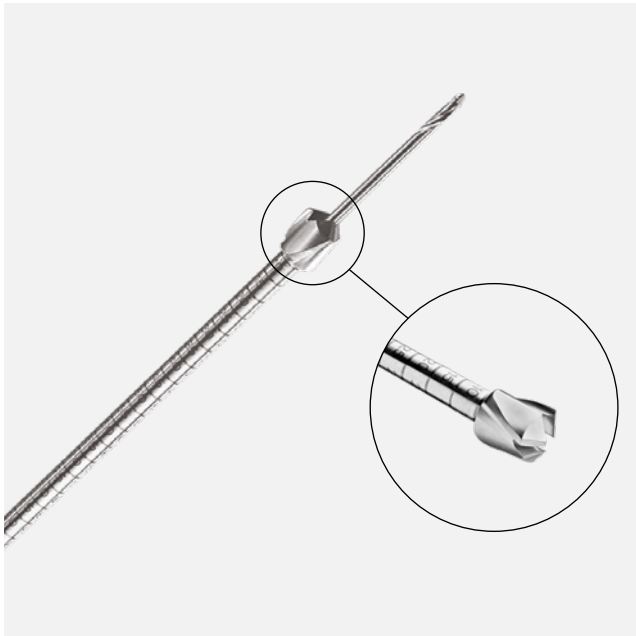

The cannulated headed reamers allow the femoral tunnel to be created via the medial portal. The sharp, easy-penetrating reamer design has rounded back edges that help protect the PCL. Markings in 5 mm increments provide precise depth control.

Product description	Item number
Headed reamers, low profile, 5-13 mm Diameter: 5, 6, 7, 8, 9, 10, 11, 12, 13 mm	AR-**1405** to -**1414**
Headed reamers, low profile, 5.5-12.5 mm Diameter: 5.5, 6.5, 7.5, 8.5, 9.5, 10.5, 11.5, 12.5 mm	AR-**1405.5** to -**1410.5**

Guide Pins

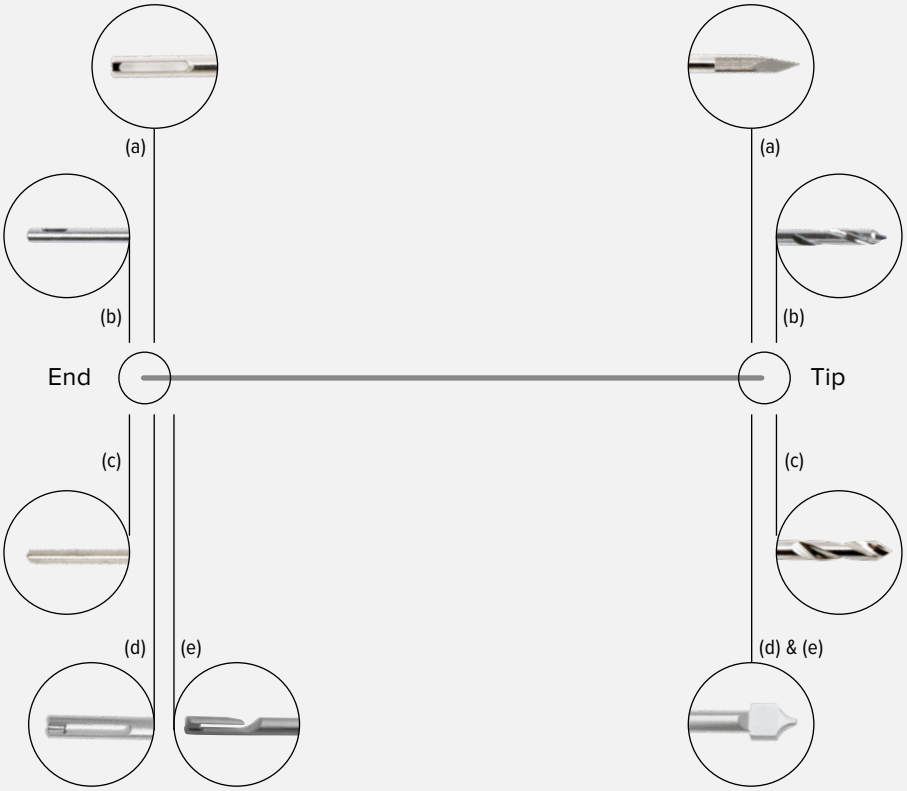

The guide pins are available either with an 2.4 mm or 4 mm outer diameter. The 2.4 mm guide pins with suture eye are designed for suture passage through a bone tunnel and come with a trocar or drill tip. The 2.4 mm guide pins with straight end support guiding cannulated instruments and implants. All 2.4 mm guide pins are available as single use or as reusable items. The 4 mm guide pins come with a spade tip drill and markings for measuring the transosseous length and for subsequent passage of TightRope implants. The TightRope sutures can be loaded into an open or closed eyelet.

Product description	Item number
Guide pin with suture eye, 2.4 mm × 435 mm **(a)**	AR-**1297L**
Guide pin with suture eye, 2.4 mm × 435 mm, sterile **(a)**	AR-**1297LS**
Drill tip guide Pin, 2.4 mm × 311 mm **(b)**	AR-**1250SB**
Drill tip guide pin, 2.4 mm × 311 mm, sterile **(b)**	AR-**1250SB-1S**
Guide pin, 2.4 mm × 280 mm **(c)**	AR-**1250L-1**
Guide pin, 2.4 mm × 280 mm, sterile **(c)**	AR-**1250LS**
ACL TightRope® drill pin, closed eyelet, 4 mm ACL **(d)**	AR-**1595TC**
TightRope® drill pin, open eyelet, 4 mm **(e)**	AR-**1595T**

Cannulated and Sterile Cannulated Drill



Full-thickness cannulated drills with graduated depth marks are designed specifically for ACL tibial tunnels, PCL tibial and femoral tunnels, and standard 2-incision ACL reconstruction procedures. The optional drill sleeves help protect soft tissue during drilling.

Product description	Item number
Reusable Cannulated Drills	
Drill, cannulated, 4 mm	AR-**1204L**
Drill, cannulated, 5 mm	AR-**1205L**
Drill, cannulated, 6 mm	AR-**1206L**
Drill, cannulated, 7 mm	AR-**1207L**
Drill, cannulated, 8 mm	AR-**1208L**
Drill, cannulated, 9 mm	AR-**1209L**
Drill, cannulated, 10 mm	AR-**1214L**
Drill, cannulated, 11 mm	AR-**1217L**
Drill, cannulated, 12 mm	AR-**1221L**
Drill, cannulated, 15 mm	AR-**1215L**
Drill sleeve, cannulated, 6 mm	AR-**1206S**
Drill sleeve, cannulated, 7 mm	AR-**1207S**
Drill sleeve, cannulated, 8 mm	AR-**1208S**
Drill sleeve, cannulated, 9 mm	AR-**1209S**
Drill sleeve, cannulated, 10 mm	AR-**1214S**
Drill sleeve, cannulated, 11 mm	AR-**1217S**
Drill sleeve, cannulated, 12 mm	AR-**1221S**
Drill sleeve, cannulated, 15 mm	AR-**1215S**
Sterile Cannulated Drills	
Drill, cannulated, 4-15 mm, sterile Diameter: 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5, 12, 15 mm	AR-**1218-40** to -**150**

Coring Reamers




The coring reamers are available in various diameters and are used for tunnel and socket drilling in the tibia. In this way, a graft plug is removed and space created for cruciate ligament reconstruction. The removed bone can be used to fill any remaining harvesting defects in the tibia, patella, or femur.

Coring Reamer Sets

Product description	Item number
Coring reamer and collared pin set, 7 mm	AR-**1220S**
Coring reamer and collared pin set, 8 mm	AR-**1222S**
Coring reamer and collared pin set, 9 mm	AR-**1223S**
Coring reamer and collared pin set, 10 mm	AR-**1224S**
Coring reamer and collared pin set, 11 mm	AR-**1226S**
Coring reamer and collared pin set, 12 mm	AR-**1227S**
Coring reamer and collared pin set, 13 mm	AR-**1229S**
Coring reamer and collared pin set, 14 mm	AR-**1231S**
Reusable Instrument	
Graft extractor, for coring reamer	AR-**1232**

Tunnel Dilators

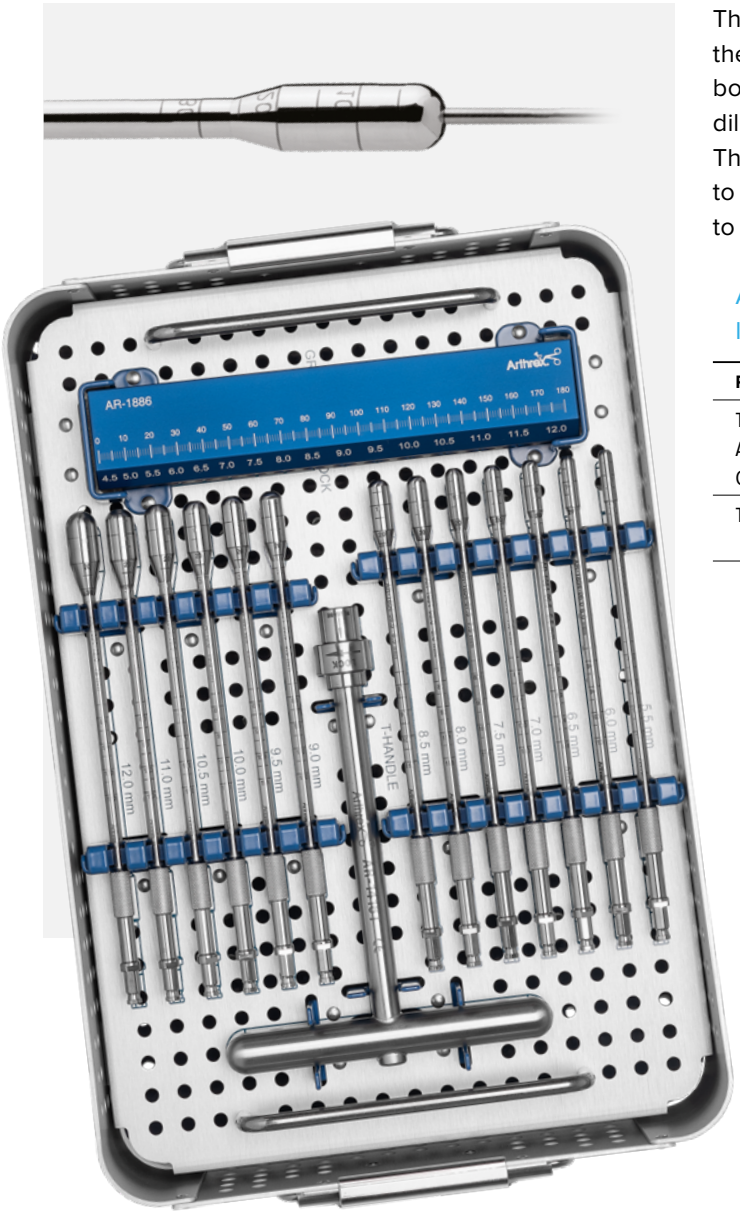

The cannulated tunnel dilators improve the fixation of the soft tissue graft by compressing the cancellous bone to the drilled femoral or tibial tunnel wall. The dilators are available in sizes from 5.5 mm to 12 mm. The Hudson quick connect T-handle is easy to connect to the dilators and allows a quick change from one size to the next.

ACL Tunnel Preparation Instrumentation Set (AR-1856S)

Product description	Item number
T-handle, Hudson, quick connect ACL reaming instrumentation set Graft sizing block	AR-**1416T** AR-**1856C** AR-**1886**
Tunnel dilators, 5.5-12 mm (0.5 mm increments)	AR-**1854-05.5** to -**12.0**

Notchplasty



The curved tunnel/notchplasty rasp (a) is ideal for completing the notchplasty and chamfering of the tibial and femoral tunnel rim. Designed specifically for rasping or smoothing tunnel rims after drilling to reduce graft abrasion or laceration, the rasp fits easily through the tibial tunnel cannula in an 8 mm tunnel. The offset shaft of the Notchplasty and graft harvesting osteotome (b) provides easy access to the lateral wall of the intercondylar notch from the anteromedial portal for anatomical widening of the notch. The open ring curette (c), which is sharp on both sides, will help to perform the soft-tissue notchplasty to identify the over-the-top position.

Product description	Item number
Tunnel/notchplasty rasp **(a)**	AR-**1282**
Notchplasty and graft harvesting osteotome, 5 mm **(b)**	AR-**1830**
Ring curette, 3.4 mm, one side cut	AR-**21010**
Ring curette, 3.4 mm, both side cut	AR-**21020**
Ring curette, 5.4 mm, one side cut **(c)**	AR-**20010**
Ring curette, 5.4 mm, both sides cut	AR-**20020**

ACL/PCL Accessories

ACL Disposables Kits 28
ACL/PCL Graft-Passing Forceps 29

ACL Disposables Kits



The single-use transtibial ACL disposables kits provide a convenient and sterile, complete set of all the guide pins and disposables required for an ACL reconstruction.

Transtibial ACL Disposables Kit With Hall-Style Saw Blade (a), qty 5 (AR-1897S)

Product description	Item number
2.4 mm guide pin, with suture eyelet	AR-**1297L**
Guide pin, with drill thread, 2.4 mm, qty 6	AR-**1250L-1**
Guide wire, for bio-interference screw, nitinol, 1.1 mm	AR-**1249**
Guide wire, nitinol, 2 mm, with 25 and 30 mm depth markings	AR-**1254-1S**
Tibial tunnel cannula	AR-**1802D**
Backflow cap	AR-**1812**
Marking ruler and sterile marking pen	**43-1032**
Hall-style sagittal saw blade, with 7 mm depth stop	AR-**1821**
Graft harvesting fix drill	AR-**1904**

Transtibial ACL Disposables Kit Without Saw Blade, qty 5 (AR-1898S)

Product description	Item number
Guide pin, with suture eyelet, 2.4 mm	AR-**1297L**
Guide pin, with drill thread, 2.4 mm, qty 6	AR-**1250L-1**
Guide wire, for bio-interference screws, nitinol, 1.1 mm	AR-**1249**
Guide wire, nitinol, 2 mm, with 25 and 30 mm depth markings	AR-**1254**
Tibial tunnel cannula	AR-**1802D**
Backflow cap	AR-**1812**
Marking ruler and sterile marking pen	**43-1032**

TransFix® II Drill Set (AR-1978S-1)

Product description	Item number
Guide pin, with drill thread, 2.4 mm, qty 6	AR-**1250L-1**
Graft suture-passing wire	AR-**1255**
TransFix® II guide pin, 3 mm	– – – – –

ACL/PCL Graft-Passing Forceps




The ACL/PCL graft forceps are designed for atraumatic manipulation of the graft intra-articularly during graft passing. The smooth, curved jaws provide rotational control of the graft during insertion into femoral tunnels and also for large loose body removal.

Product description	Item number
ACL/PCL graft-passing graspers, with SR handle	AR-**13400SRF**
ACL/PCL graft-passing graspers, with NR handle	AR-**13400NRF**

Graft Harvesting

QuadPro™ Tendon Harvester 32
Minimally Invasive Quad Tendon Set 32
Atraumatic Hamstring Harvester 33
Hamstring Tendon Strippers 33
Minimally Invasive Hamstring Harvesting Set 34
Graft Harvesting Cutting Guides and Saw Blades 34
Parallel Graft Knife for Patella Tendon Harvesting 35
Graft-Harvesting Retractor 35
ACL Graft Shaper 35

QuadPro™ Tendon Harvester

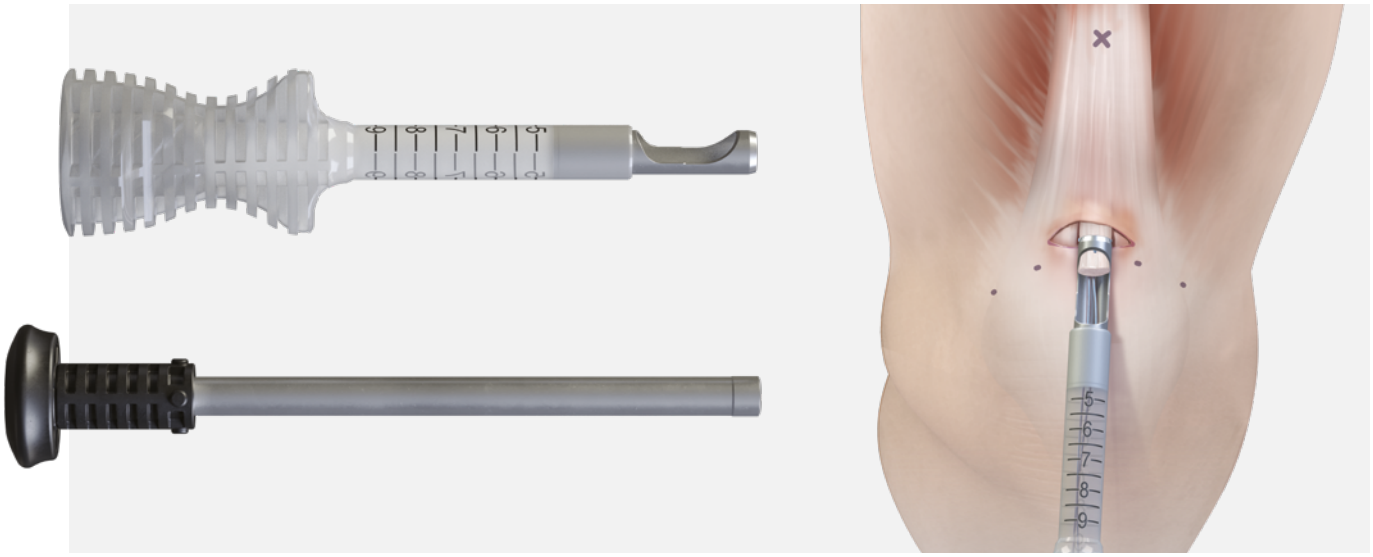

The QuadPro tendon harvester was specifically engineered to allow for efficient, minimally invasive graft harvesting while reducing the morbidity and challenges associated with harvesting techniques.

Reproducible Graft Sizing:

- Available in various sizes for the appropriate graft diameter (8, 9, 10, and 11 mm)
- Sharp cylindrical tip harvests a round, true-to-size graft
- Clear handle with graduations to determine graft length

Minimally Invasive Technique:

- Minimal incision and dissection required
- Reduces procedure time and graft site morbidity

Graft Amputation:

- Graft retrieved through amputation window in device after harvesting
- Sharp cutting edge in window amputates graft when push rod is completely deployed

QuadPro™ Tendon Harvester Kit

Product description	Item number
QuadPro™ tendon harvester, 8 mm	AR-**2386-08**
QuadPro™ tendon harvester, 9 mm	AR-**2386-09**
QuadPro™ tendon harvester, 10 mm	AR-**2386-10**
QuadPro™ tendon harvester, 11 mm	AR-**2386-11**


Minimally Invasive Quad Tendon Set

The minimally invasive quad tendon harvest system allows surgeons to efficiently harvest a graft of a desired length and diameter through a small incision. The system has the versatility to create grafts from soft tissue only, or from bone and soft tissue.

Minimally Invasive Quad Tendon Set (AR-2382S)

Product description	Item number
Quad tendon graft cutting guide	AR-**2383**
Quad tendon stripper / cutter **(b)**	AR-**2384**
Instrument case	AR-**2382C**
Disposable Blades for Quadricep Tendon Graft Cutting Guide **(a)**	
Quad tendon graft cutting blade, 9 mm	AR-**2385-09**
Quad tendon graft cutting blade, 10 mm	AR-**2385-10**
Quad tendon graft cutting blade, 11 mm	AR-**2385-11**

Atraumatic Hamstring Harvester

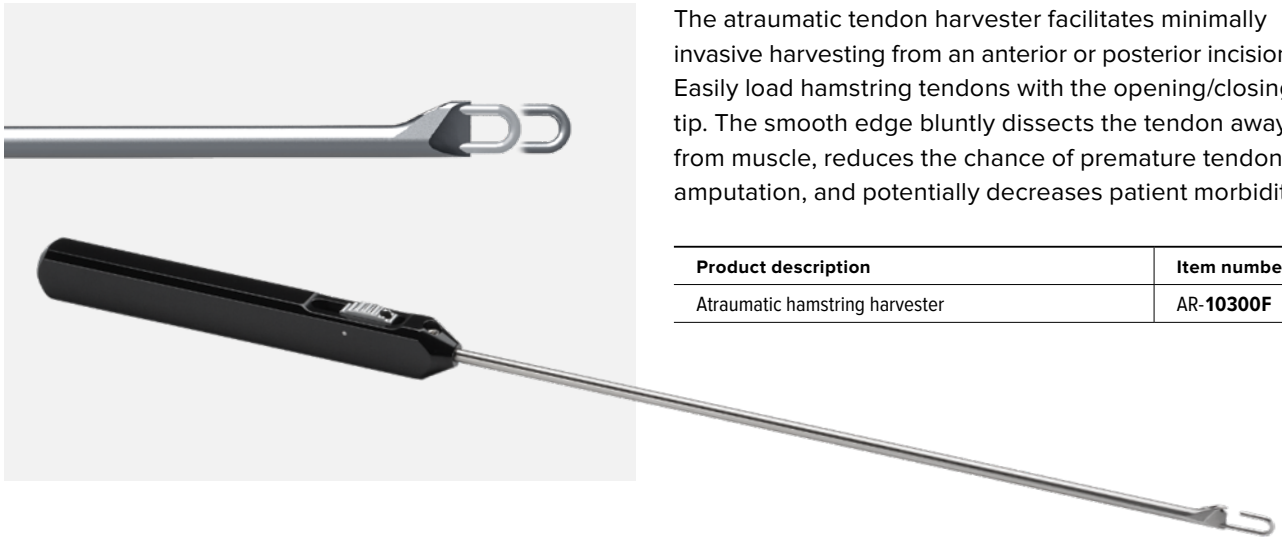

The atraumatic tendon harvester facilitates minimally invasive harvesting from an anterior or posterior incision. Easily load hamstring tendons with the opening/closing tip. The smooth edge bluntly dissects the tendon away from muscle, reduces the chance of premature tendon amputation, and potentially decreases patient morbidity.

Product description	Item number
Atraumatic hamstring harvester	AR-**10300F**


Hamstring Tendon Strippers



The 5 and 7 mm-diameter hamstring tendon strippers provide maximum tendon length with less soft tissue trauma through a small incision just medial to the tibial tubercle. While harvesting, use the graduations on the shaft to determine graft length. The spiral end of the “pigtail” facilitates the capture of distally attached tendons for proximal subcutaneous stripping of hamstring grafts.

Product description	Item number
Semitendinosus stripper, 5 mm	AR-**1278**
Semitendinosus stripper, 7 mm **(a)**	AR-**1278L**
Pigtail hamstring tendon stripper, open end, 5 mm **(b)**	AR-**1278P**
Pigtail hamstring tendon stripper, open end, 7 mm	AR-**1278PL**

Minimally Invasive Hamstring Harvesting Set

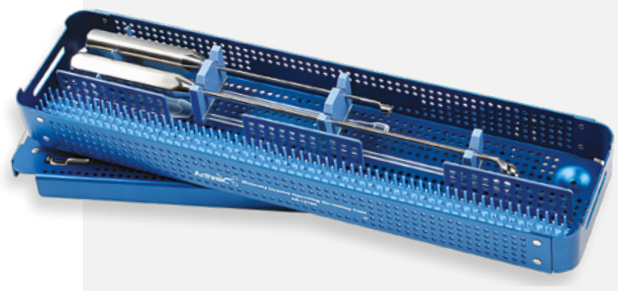


This set includes 2 harvesters designed for removal of the hamstring tendons through a small, minimally invasive posteromedial incision. Shorter shafts improve stiffness and facilitate harvesting from the posteromedial incision. The open harvester is large enough to load the thicker, more proximal portion of the hamstring tendons. The closed distal harvester is slightly sharper, permitting elevation of the tendons off the tibial insertion.

Minimally Invasive Hamstring Harvesting Set (AR-1279S)

Product description	Item number
Pigtail hamstring tendon stripper, open end, 5 mm diameter	AR-**1278P**
Pigtail hamstring tendon stripper, open end, 7 mm diameter	AR-**1278PL**
Hamstring harvesting instrument case	AR-**1279C**


Graft Harvesting Cutting Guides and Saw Blades

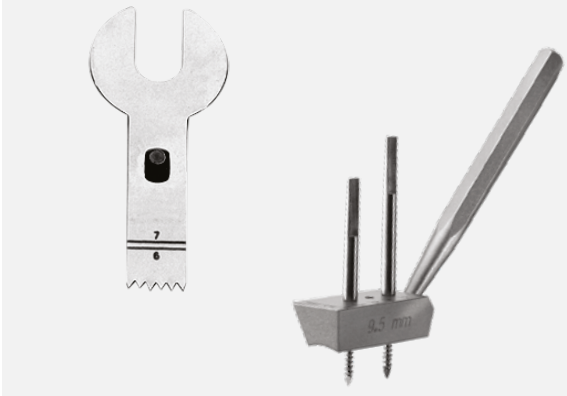

The cutting guides allow the removal of a trapezoid-shaped bone plug with pre-drilled suture holes from the patella and tibia. Arthrex saw blades have the adjusted width and tooth configuration for BTB graft harvesting. A mechanical depth stop provides secure depth control.

Product description	Item number
Graft harvesting cutting guide, 8.5 mm wide	AR-**1809**
Graft harvesting cutting guide, 9.5 mm wide	AR-**1810**
Graft harvesting cutting guide, 10.5 mm wide	AR-**1811**
Graft harvesting kit, with Hall-style sagittal saw blade and 2 threaded fixation pins, short and long	AR-**1821S**
Hall-style sagittal saw blade, with 7 mm depth stop	AR-**1821**
Threaded fixation pins, for graft harvesting guide, 1 long and 1 short	AR-**1904**

Parallel Graft Knife for Patella Tendon Harvesting

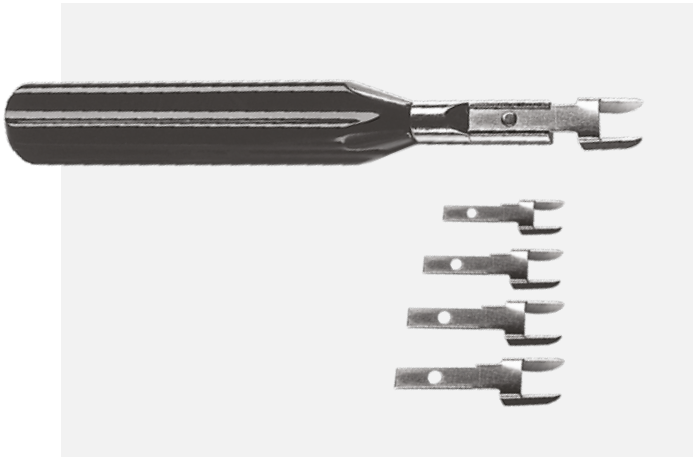

The parallel graft knife is designed for harvesting the patellar or quadriceps tendon for use during ACL/PCL reconstruction. The parallel blades create a precise and a parallel proximal-to-distal incision. It is available in sizes from 8 to 11 mm and is used with a reusable handle.

Product description	Item number
Parallel graft knife handle	AR-**2285H**
Parallel graft knife blade, 8 mm	AR-**2285-08**
Parallel graft knife blade, 9 mm	AR-**2285-09**
Parallel graft knife blade, 10 mm	AR-**2285-10**
Parallel graft knife blade, 11 mm	AR-**2285-11**

Graft-Harvesting Retractor



The BTB graft-harvesting retractor is hooked over the upper pole of the patella. This is then levered to securely retract the surrounding skin and subcutaneous tissue. The graft-harvesting retractor can also be used for the retraction of skin and soft tissue when preparing the tibial tunnel.

Product description	Item number
Graft-harvesting retractor	AR-**1420**

ACL Graft Shaper



The ACL graft shaper is a bone “press” that shapes and compresses cancellous bone to accommodate a precise graft fit into predrilled tibial or femoral tunnels during ACL/PCL reconstruction. An adjustable spacer in the handle provides controlled size compression of bone plugs to 8, 9, 10, or 11 mm diameters.

Product description	Item number
ACL graft shaper	AR-**1234**

FiberWire® Suture

FiberLoop® and TigerLoop™ 38

FiberWire® Sutures With Needles 38

FiberWire® Sutures and SutureTape 39

FiberLink™ and TigerLink™ 39


FiberStick™ and TigerStick® 40

FiberSnare® Sutures 40

FiberTape® 41

Suture Tensioner With Tensiometer 41

FiberLoop® and TigerLoop™

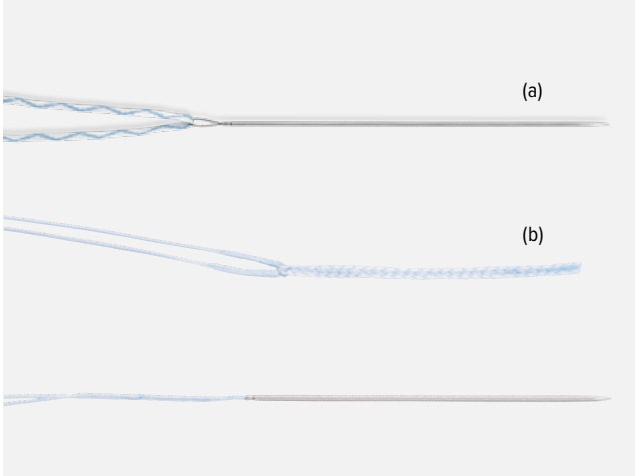


The FiberLoop and TigerLoop is a continuous loop of FiberWire on a thin, straight, nitinol needle that enables the performance of a SpeedWhip technique. Graft preparation using the SpeedWhip technique drastically reduces time spent preparing the graft, uniformly compresses the graft, improves strength, and allows adjustments of graft length.[1] The FiberLoop and TigerLoop product line has grown to more than a dozen different options for varying surgeon preferences.

Product description	Item number
FiberLoop®, with 1.3 mm SutureTape suture **(a)**	AR-**7534**
TigerLoop™, with 1.3 mm SutureTape suture	AR-**7534T**
#2 FiberLoop®, with straight needle	AR-**7234**
#2 TigerLoop™, with straight needle, with TigerWire®	AR-**7234T**
#2 FiberLoop®, blue, 51 cm, 1/2 circle, with curved needle	AR-**7234C**
#2 FiberLoop®, with durable straight needle	AR-**7284**
#0 FiberLoop® suture, blue, 33 cm, with straight needle, 76 mm, with 7 mm loop	AR-**7253**
#0 TigerLoop® suture, white/green, with straight needle, 76 mm, with 7 mm loop	AR-**7253T**
#2-0 FiberLoop®, blue, 76.2 cm, with diamond point needle, 48 mm, 1/2 circle	AR-**7232-01**
#2-0 FiberLoop®, blue, 60.96 cm, with diamond point needle, 26.2 mm, 3/8 circle	AR-**7232-02**
#2-0 FiberLoop®, blue, 33 cm, with diamond point straight needle, 64.8 mm	AR-**7232-03**
FiberLoop® with FiberTag® suture, with looped straight needle	AR-**7264**
FiberLoop® with FiberTag® suture, with swedged-on straight needle **(b)**	AR-**7266**

Reference

1. Ostrander RV 3rd, Saper MG, Juelson TJ. A biomechanical comparison of modified Krackow and locking loop suture patterns for soft-tissue graft fixation. *Arthroscopy.* 2016;32(7):1384-1388. doi:10.1016/j.arthro.2016.01.054


FiberWire® Sutures With Needles

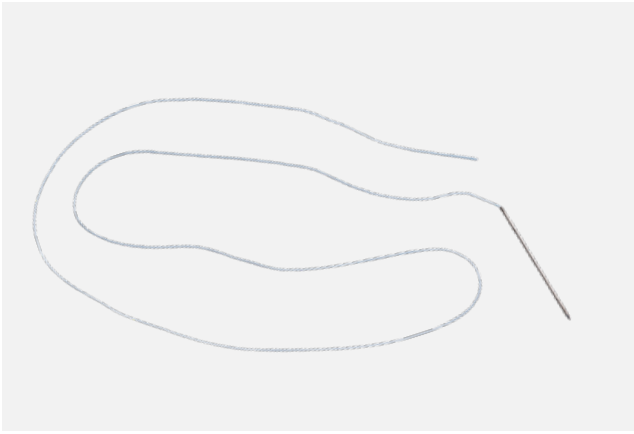

This product family includes various FiberWire sutures with directly attached straight or curved needles. These products allow creating locking Krackow stitches for graft prep and tendon avulsions in large tendons such as quadriceps or patellar tendons.

Product description	Item number
#2 FiberWire®, with straight needle	AR-**7246**
#2 FiberWire®, with 2 straight needles	AR-**7246-02**
#2 FiberWire®, blue, 97 cm, with tapered needle, 26.5 mm, 1/2 circle	AR-**7200**
#2 FiberWire®, 97 cm, 1 white/black, 1 blue, with tapered needle, 26.5 mm 1/2 circle	AR-**7208**
#2-0 FiberWire®, blue, 46 cm , with tapered needle, 26.5 mm, 1/2 circle	AR-**7242**
#2-0 FiberWire®, blue, 46 cm, with tapered needle, 17.9 mm, 3/8 circle	AR-**7220**
#0 FiberWire®, blue, 97 cm, with tapered needle, 22.2 mm, 1/2 circle	AR-**7250**
#0 FiberWire®, blue, 97 cm, with diamond point needle, 22.2 mm, 1/2 circle	AR-**7251**

FiberWire® Sutures and SutureTape

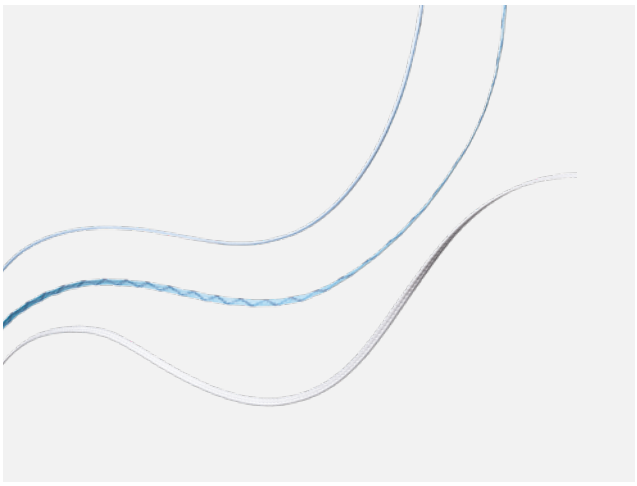

FiberWire suture is the polyester suture with an ultra-high-molecular-weight-polyethylene (UHMWPE) core. FiberWire has greater strength than polyester suture of the same size, with superior feel, smooth tying characteristics, and a lower knot profile.[1] FiberWire is the ideal suture for most orthopedic soft tissue repairs, virtually eliminating suture breakage during knot tying. FiberWire mini SutureTape is just 0.9 mm wide, compared to the 1.3 mm width of regular SutureTape. It comes with rounded ends to link to 1/2 circle needles. The mini SutureTape allows for tying smaller knot stacks, and the flat tape distributes the forces evenly.

Product description	Item number
#0 FiberWire®, white, 97 cm	AR-**7255**
#1 FiberWire®, blue, 97 cm	AR-**7216**
#2 FiberWire®, blue, 97 cm	AR-**7233**
#5 FiberWire®, blue, 97 cm	AR-**7210**
Mini SutureTape, white/blue, 0.9 mm wide, qty 12	AR-**7521**
Free eye needles	**3180**

Reference

1. Wüst DM, Meyer DC, Favre P, et al. Mechanical and handling properties of braided polyblend polyethylene sutures in comparison to braided polyester and monofilament polydioxanone sutures. *Arthroscopy.* 2006;22(11):1146-1153. doi:10.1016/j.arthro.2006.06.013


FiberLink™ and TigerLink™



FiberLink and TigerLink SutureTape includes a 3.8 cm closed loop with a 61 cm tail of #2-0 FiberWire suture (0.9 mm). FiberLink SutureTape is solid blue and TigerLink SutureTape is white with black stripes to aid with suture management. Optionally a #0 FiberLink and TigerLink version is available. Each product is packaged in a box of 12.

Product description	Item number
FiberLink™, SutureTape, white/blue, 0.9 mm, with closed loop	AR-**7559**
TigerLink™, SutureTape, white/black, 0.9 mm, with closed loop	AR-**7559T**
#0 FiberLink™ suture, FiberWire® suture, blue, with 3.8 cm closed loop at 1 end	AR-**7258**
#0 TigerLink™ suture, TigerWire® suture, white/black, with 3.8 cm closed loop at 1 end	AR-**7258T**


FiberStick™ and TigerStick®

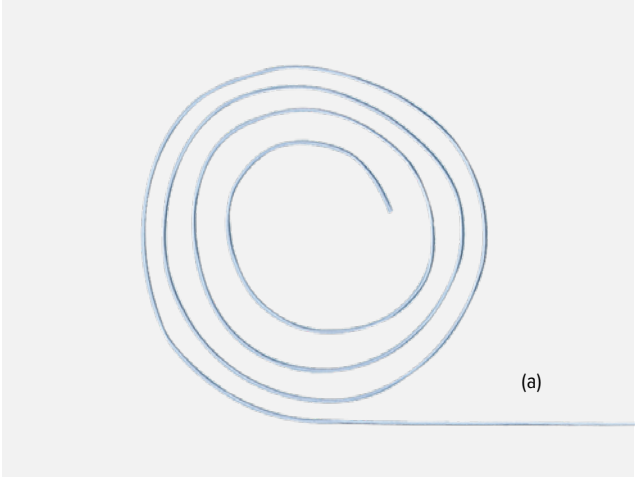

FiberStick, available in #2 or #2-0 sizes, is FiberWire with a 30 cm stiffened end. Used in conjunction with small-diameter cannulated suture-passing instruments, it makes suture passing easy. FiberSticks are sterile and come packaged with the stiff end in a plastic tube. TigerStick is a white #2 FiberStick with black stripes and a stiffened 30 cm end.

Product description	Item number
FiberStick™, #2 FiberWire®, blue, 127 cm, 1 end stiffened, 30 cm **(a)**	AR-**7209**
#2 TigerStick®, #2 TigerWire®, white/black, 127 cm, 1 end stiffened, 30 cm	AR-**7209T**
#2-0 FiberStick™, #2-0 FiberWire®, blue, 127 cm, 1 end stiffened, 30 cm	AR-**7222**


FiberSnare® Sutures

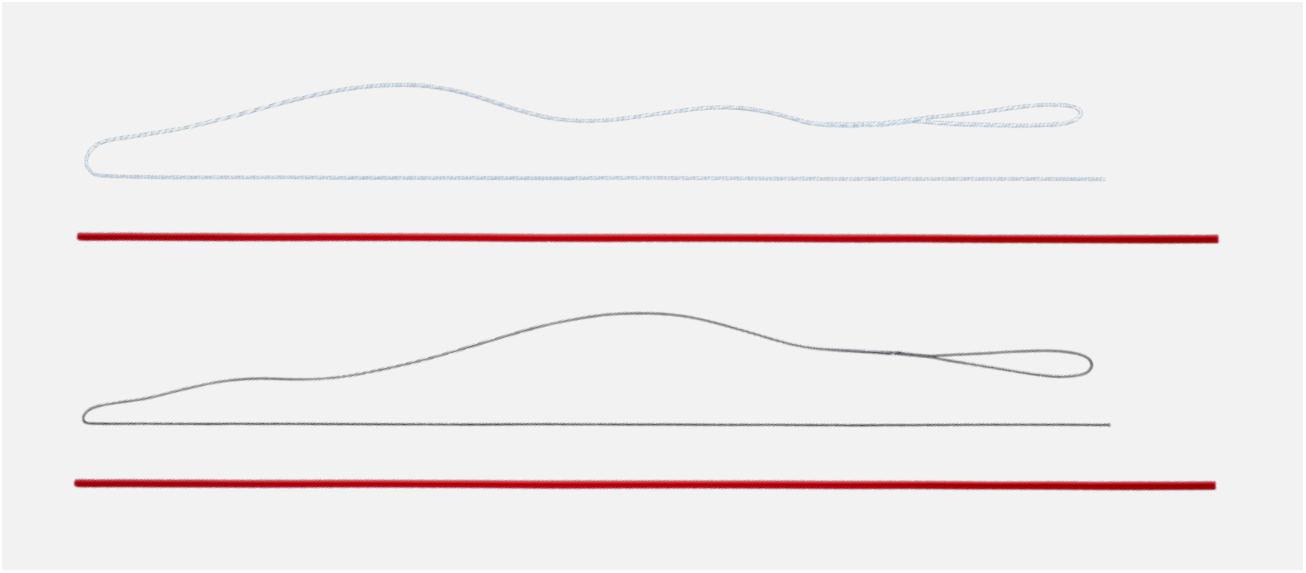

Two color options enhance visibility and allow for easier suture identification and management. FiberSnare suture can be used in any orientation, allowing the delivery of either the loop or free tail of the suture. For example, FiberSnare serves as a suture shuttle to pass traction sutures through bone tunnels.

Product description	Item number
#2 FiberSnare® with #2 FiberWire® braided polyblend suture, white/blue with closed loop, 66 cm, one end stiffened, 30 cm	AR-**7209SNL**
#2 FiberSnare® with #2 FiberWire® braided polyblend suture, black/white with closed loop, 66 cm, one end stiffened, 30 cm	AR-**7209SNT**


FiberTape®

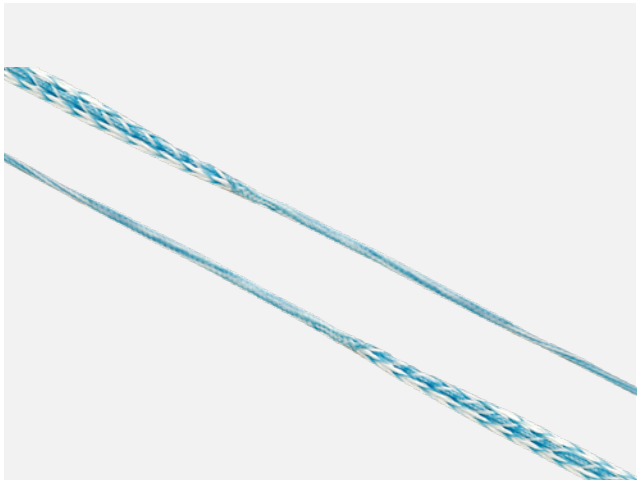

FiberTape is an ultra-high-strength, 2 mm wide tape using the same long-chain polyethylene structure as the FiberWire suture. The broad base of the FiberTape is suitable for repairs in degenerative tissue where tissue pull-through may be a concern.

Product description	Item number
FiberTape®, blue, 2 mm wide, 97 cm long, each end tapered to #2 FiberWire®, 20 cm, total length 137 cm	AR-**7237**

Suture Tensioner With Tensiometer

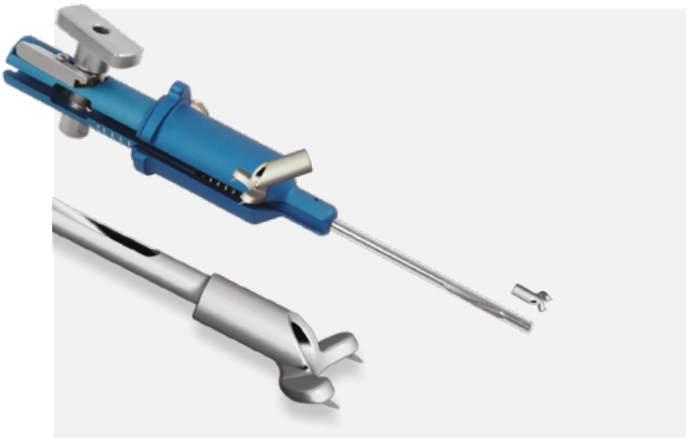


The suture tensioner with tensiometer enables a defined tensioning of the ACL graft over a button. It also makes it possible to knot a backup suture.

Product description	Item number
Suture tensioner, with tensiometer	AR-**1529**
Tensiometer foot	AR-**1530**

Graft Prep, Sizing, and Pretensioning

GraftPro® Graft Preparation Set 44
Graft Compression Tubes 45

GraftPro® Graft Preparation Set

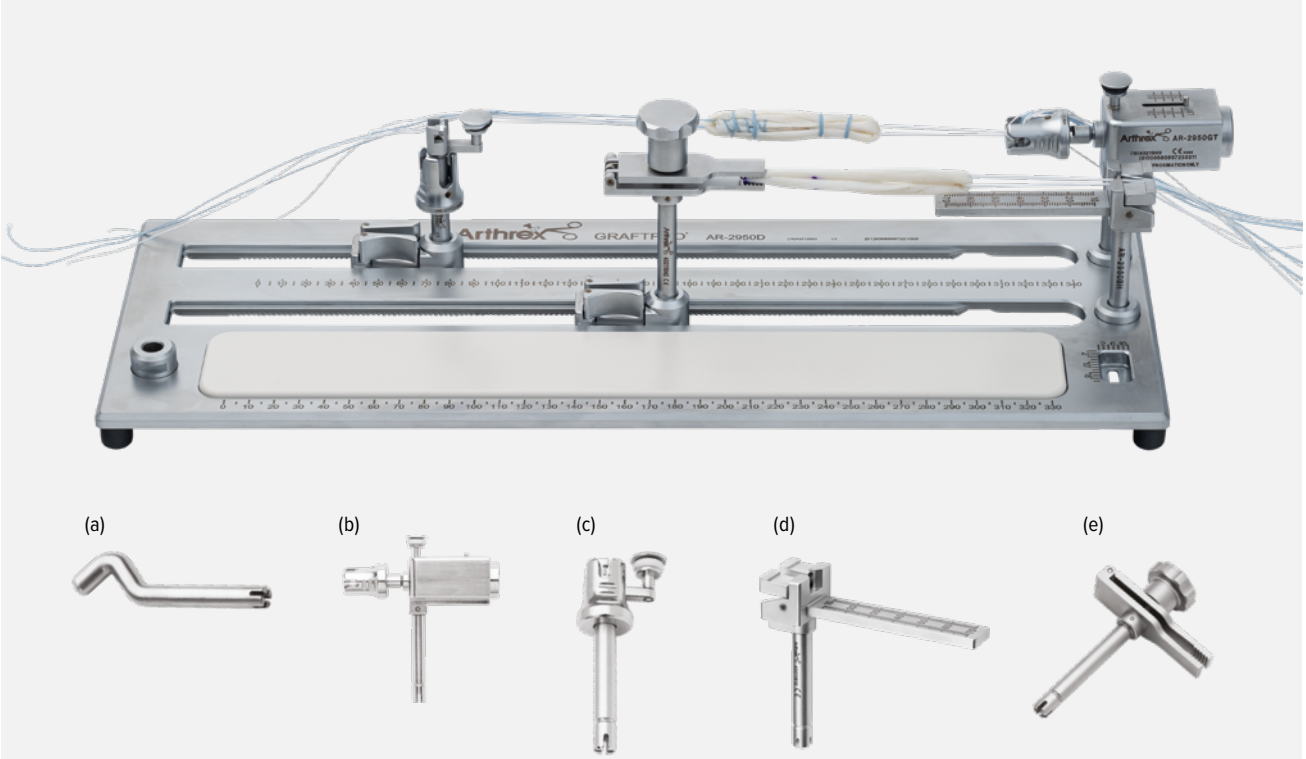

The new GraftPro system brings graft preparation and tensioning to a new level of simplicity and convenience. The unique ratcheting adjustment track system allows 1-handed movement of attachments along the length of the board and locks them into place automatically. All attachments are interchangeable, from the adjustable tracks to the fixed positions. Two parallel rails allow simultaneous preparation and tensioning of 2 grafts at a time, or when performing a single double-bundle graft. The BTB well facilitates stable cutting of patella tendon bone blocks to size and drilling of suture holes through the board. Enhanced attachments hold a variety of implants and grafts in place firmly and atraumatically.

GraftPro® Graft Preparation System (AR-2950DS)

Product description	Item number
GraftPro® case	AR-**2950DC**
GraftPro® board	AR-**2950D**
GraftPro® posts **(a)**	AR-**2950AP**
GraftPro® GraftLink® tensioner **(b)**	AR-**2950GT**
GraftPro® GraftLink® holder **(c)**	AR-**2950GH**
GraftPro® button holder **(d)**	AR-**2950BH**
GraftPro® soft-tissue clamp **(e)**	AR-**2950SC**
Graft sizing block	AR-**1886**
Optional	
Cutting board clamp	AR-**2950CBC**

Graft Compression Tubes



GraftLink compression tubes are full-circumference, full-length, autoclavable, clear tubes that facilitate graft compression, sizing, and preparation. The unique transparent tubes with an etched ruler allow visualization of the graft during diameter and length sizing. The funneled entrance and attachable handle facilitate the entry of grafts into the sizer, allowing compression of up to 2 mm. The tapered tip allows delivery of the graft directly into the tibial tunnel or medial portal.

GraftLink® Graft Tube Set (AR-1886-S)

Product description	Item number
GraftLink® graft tubes, 5-13 mm (0.5 mm increments)	AR-**1886-050** to -**130**
GraftLink® graft tube flange	AR-**1886-001**
GraftLink® graft tube instrument case	AR-**1886C-01**

Graft Fixation

ACL TightRope® II Implant System 48

ACL TightRope® II RT With and Without *Internal*Brace™ 48

BTB TightRope® II Implants With and Without *Internal*Brace™ 49

FiberTag® TightRope® Implant 49

TightRope® II ABS Implant 50

TightRope® Button Extender 50

ACL TightRope® Implants 51

FastThread™ BioComposite Interference Screw 52

FastThread™ PEEK Interference Screw 53

GraftBolt® Implant 54

Titanium Inteference Screws 55

ACL Backup Fixation 56

Suture Buttons 57

RetroButton® Implant 57

ACL/PCL Cortical Fixation Set 58

Bio-Tenodesis™ Screw System 59

ACL TightRope® II Implant System



The ACL TightRope fixation system offers adjustable cortical fixation for cruciate ligament reconstruction. ACL TightRope eliminates the need for different implant sizes. It also facilitates complete graft passing in the short femoral tunnels that are common with anatomic ACL drilling. The ACL TightRope II implant is the first SutureTape braided adjustable loop system on the market. Flat SutureTape offers better handling characteristics and is more resistant to graft abrasion or pull-through than traditional round sutures.[1] An improved, proprietary 5-point locking design resists cyclic displacement and makes tying a knot unnecessary.[2] It enables precise tensioning and the ability to incrementally re-tension the construct. The TightRope II product line is available in multiple configurations to accommodate various graft types and techniques. RT and BTB implants are available double-loaded or with *Internal*Brace. ABS available as standard or open.


Accessories for All TightRopes® Except ABS

Product description	Item number
ACL TightRope® drill pin, closed eyelet, 4 mm	AR-**1595TC**
ACL TightRope® drill pin, open eyelet, 4 mm	AR-**1595T**
ACL TightRope® suture tensioner	AR-**1588H**
TightRope® button extender	AR-**1589RT**

Reference

1. Arthrex, Inc. Data on file (LA1-00038-EN_B). Naples, FL; 2017.
2. Arthrex, Inc. Data on file (APT-G01155). Munich, Germany; 2020.


ACL TightRope® II RT With and Without *Internal*Brace™

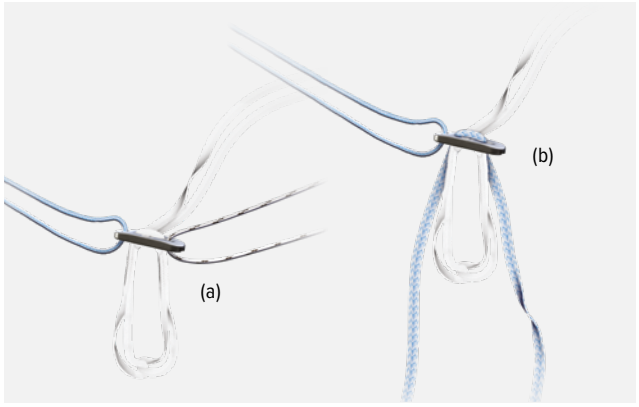

ACL TightRope II RT comes with double-loaded passing sutures which allows safe suture passage and controlled cortical button placement. The TightRope II RT with *Internal*Brace ligament augmentation implant is loaded with an additional FiberTape suture in order to reinforce the tendon graft by allowing individual tensioning of the graft and the IB construct. On the tibial side, the *Internal*Brace can be fixed with SwiveLock anchors, using the ACL backup fixation kit, or by knotting it on top of the TightRope ABS button.

Product description	Item number
TightRope® II RT **(a)**	AR-**1588RT-2J**
TightRope® II RT-IB **(b)**	AR-**1588RT-IB**
ACL SwiveLock® Backup Fixation Kit (AR-1593)	
BioComposite SwiveLock® anchor, with closed eyelet, 4.75 mm × 19.1 mm	AR-**2324BCC**
Drill, spade tip	AR-**1927D**
Punch/tap, for 4.75 mm SwiveLock®	AR-**2324PTB**


BTB TightRope® II Implants With and Without *Internal*Brace™

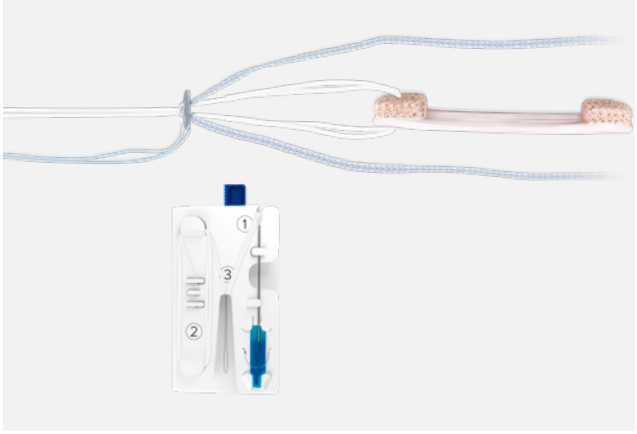

The simplicity and strength of ACL TightRope II can also be used with bone-tendon ACL grafts. The BTB TightRope II offers the same adjustable, 5-point locking system as the ACL TightRope II RT, but allows placement through a small drill hole in the cortical bone block. The BTB TightRope II comes with double-loaded passing sutures, which allow safe suture passage and controlled cortical button placement. The BTB TightRope II, *Internal*Brace is pre-loaded with an additional FiberTape suture in order to reinforce the BTB graft by allowing individual tensioning of the graft and the IB construct. On the tibial side, the *Internal*Brace can be fixed with SwiveLock anchors, using the ACL backup fixation kit, or by knotting it on top of the TightRope ABS Button.

Product description	Item number
TightRope II BTB-2J	AR-**1588BTB-2J**
TightRope II BTB-IB	AR-**1588BTB-IB**
ACL SwiveLock® Backup Fixation Kit (AR-1593)	
BioComposite SwiveLock® anchor, with closed eyelet, 4.75 mm × 19.1 mm	AR-**2324BCC**
Drill, spade tip	AR-**1927D**
Punch/tap, for 4.75 mm SwiveLock®	AR-**2324PTB**


FiberTag® TightRope® Implant

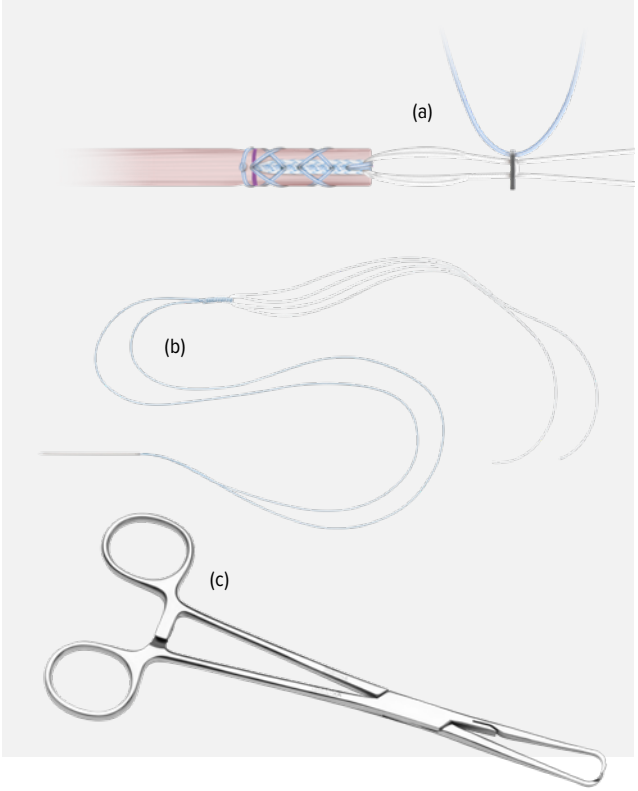

The ACL TightRope with FiberTag implant facilitates attachment of ACL TightRope RT and ABS implants to single-ended grafts, such as quadriceps tendon grafts. The suturing technique, along with innovative packaging and new GraftClamp graft preparation instrument, makes preparing quad tendon grafts faster and more reproducible than ever.

Product description	Item number
FiberTag® TightRope® implant **(a)**	AR-**1588RTT**
FiberTag® TightRope® ABS implant **(b)**	AR-**1588TNT**
GraftClamp graft prep instrument **(c)**	AR-**2386T**
FiberTag® Implants From First Generation	
FiberLoop®, with FiberTag®	AR-**7264**
FiberLoop®, with FiberTag®, suture loop, blue, with 5 cm FiberTape®, with reinforced needle	AR-**7266**


TightRope® II ABS Implant

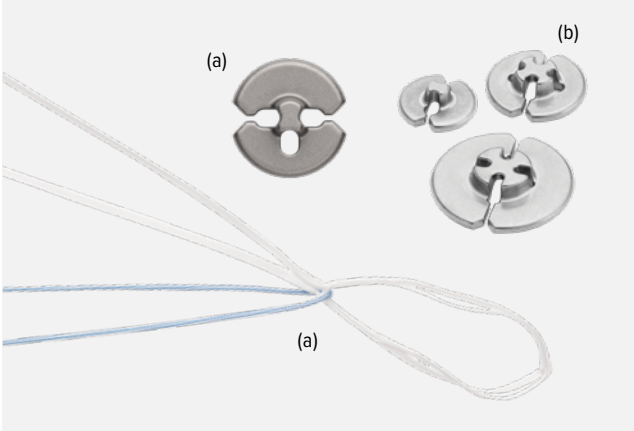

Product description	Item number
TightRope® II ABS implant **(a)**	AR-**1588TN-20**
TightRope® II ABS implant ,open	AR-**1588TN-21**
Button Options	
TightRope® ABS button, round, concave 11 mm, for *Internal*Brace™ technique **(a)**	AR-**1588TB-3IB**
TightRope®ABS, button, 8 mm × 12 mm	AR-**1588TB**
TightRope® ABS, button, round, Ø14 mm	AR-**1588TB-1**
TightRope® ABS, button, oblong 3.4 mm × 13 mm	AR-**1588TB-2**
TightRope® ABS, button, round, concave, Ø11 mm	AR-**1588TB-3**
TightRope® ABS, button, round, concave, Ø14 mm **(b)**	AR-**1588TB-4**
TightRope® ABS, button, round, concave, Ø17 mm	AR-**1588TB-17**
TightRope® ABS button, round, concave, Ø20 mm	AR-**1588TB-5**

The TightRope II Attachable Button System allows the ACL TightRope implants to be passed through the bone tunnel without a button. After passage through the bone tunnel, an individually selectable ABS button for cortical fixation is threaded in and tightened. Can be used for both all-inside and cortical standard fixation with completely drilled tibial tunnels.


TightRope® Button Extender

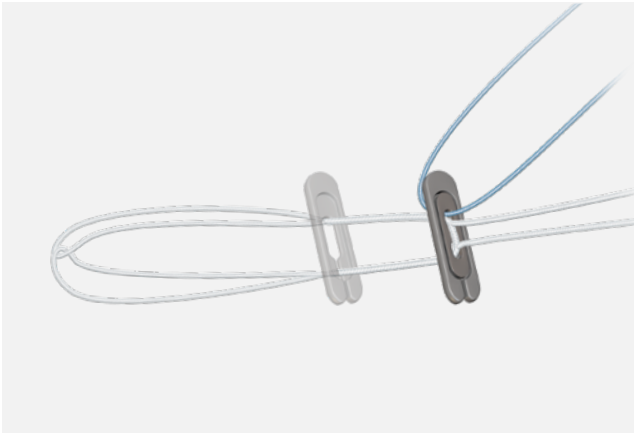

The TightRope button extender is ideal for cortical blow-outs, revisions, and the use of continuous bone tunnels. Loading onto a TightRope button is easy without having to remove the graft. A large 20 mm × 5 mm footprint maximizes button-to-bone contact against the cortex.

Product description	Item number
TightRope® button extender	AR-**1589RT**


ACL TightRope® Implants

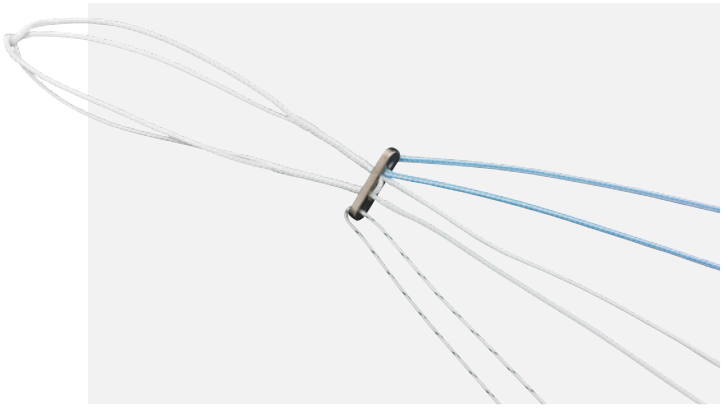

ACL TightRope RT allows surgeons to advance the graft by pulling the tensioning strands in the same direction of graft advancement. This innovation eliminates the need to retrieve tensioning strands from the joint and allows the surgeon to pull in line with graft advancement. The TightRope RT also facilitates tibial fixation with GraftLink.

Product description	Item number
ACL TightRope® RT	AR-**1588RT**
ACL TightRope® RT, double-loaded passing sutures	AR-**1588RT-J**
ACL TightRope® RT implant system, with ACL TightRope® guide pin	AR-**1588RTS**
ACL TightRope implant	AR-**1588T**
BTB TightRope®	AR-**1588BTB**
ACL BTB TightRope®, with flip suture	AR-**1588BTB-J**
ACL TightRope® No Button	AR-**1588TN**
Open TightRope® ABS	AR-**1588TN-1**
TightRope® ABS, with ABS button, Ø11 mm	AR-**1588TN-2**
TightRope® ABS, with ABS button, Ø14 mm	AR-**1588TN-3**
TightRope® ABS, with ABS button, Ø20 mm	AR-**1588TN-4**

FastThread™ BioComposite Interference Screw

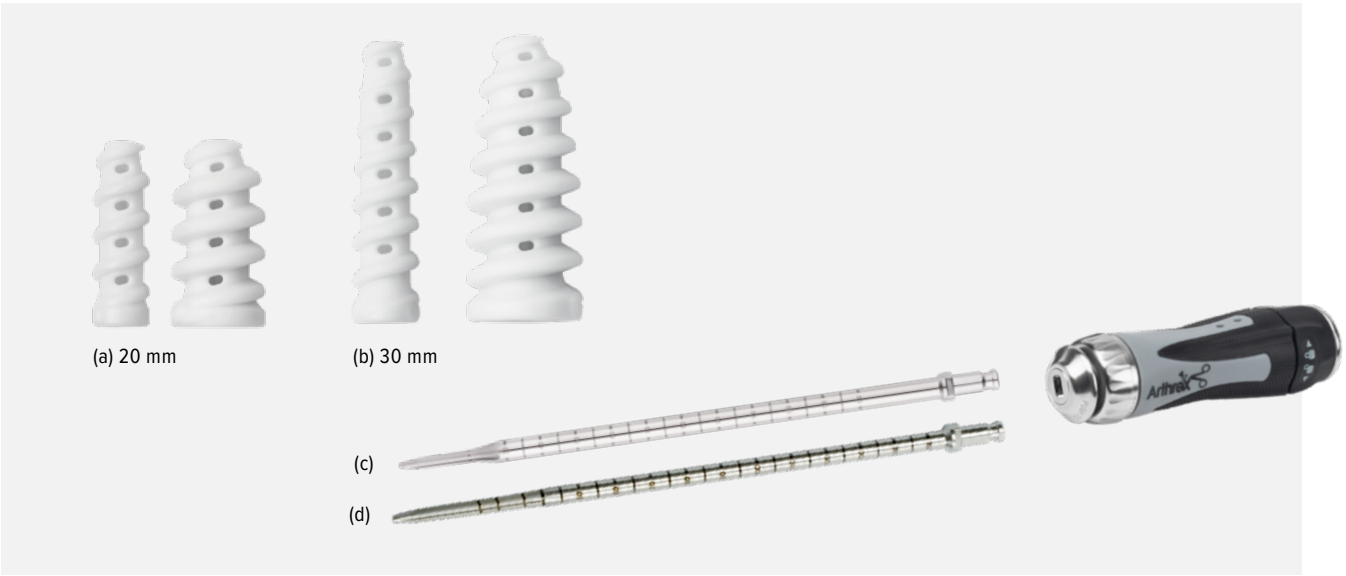

FastThread BioComposite interference screws are a completely new design with a prominent leading and large thread pitch to facilitate screw engagement and advancement. Vented sidewalls and screw geometry decrease material by 22% without losing insertion or fixation strength.[1] The cannulation and fenestrations in the screw design allow for bony ingrowth and channeling of biologic growth factors during healing.[1]

The screws, which come in 20 and 30 mm lengths, offer excellent strength on insertion and have been biomechanically tested.[2]

FastThread™ BioComposite Interference Screws

Product description	Item number
6 mm × 20 mm (used with 6 mm driver)	AR-**4020C-06**
7-10 mm × 20 mm screws **(a)**	AR-**4020C-07** to -**10**
7-12 mm × 30 mm screws **(b)**	AR-**4030C-07** to -**12**
Taps	
Tap shafts, quick connect, 6-10 mm	AR-**4020T-06** to -**10**
Tap shafts, quick connect, flexible, 6-10 mm	AR-**4020TF-06** to -**10**
Guide Pins	
Nitinol guide pin, 1.1 mm, with 25 & 30 mm depth markings	AR-**1249**
Nitinol guide pin, 2 mm, with 25 mm and 30 mm depth markings	AR-**1254**
SlapDriver Handle With Quick Connect Drivers	
SlapDriver, quick connect, ratcheting handle	AR-**1999SD**
Driver, for 6 mm × 20 mm screws, quick connect **(c)**	AR-**4019D-1**
Driver, for 20 and 30 mm screws, quick connect **(d)**	AR-**1996CD-1**
Drivers for 6 mm × 20 mm screws	
Driver, fixed handle	AR-**4019D**
Drivers for 7-12 mm screws	
Driver, for 20 and 30 mm screws, fixed handle	AR-**1996CD**
Driver, for 20 mm screws only, fixed handle	AR-**4020D**
Driver, for 20 mm screws only, quick connect **(b)**	AR-**4020D-1**
Driver, for 20 mm screws only, flexible shaft, quick connect	AR-**4020DF**
Screwdriver handle, nonratcheting	AR-**1999NR**
Screwdriver handle, ratcheting	AR-**1999**


Previous Generation: Biocomposite Interference Screws

Product description	Item number
Screws, with protective sleeve, 6-10 mm × 23 mm	AR-1360C to -**1400C**
Screws, full thread, 7-12 mm × 28 mm	AR-1370TC to -**1404TC**
Delta screws, round head, 8-11 mm × 28 mm	AR-**5028C-08** to -**11**
Delta screws, 9-12 mm × 35 mm	AR-**5035TC-09** to -**12**
Interference screwdriver, quick connect, BioComposite, long	AR-**1996CDL-1**
Dilator, for BioComposite interference screw, 6-8 mm (1 mm increments)	AR-**1377C-06** to -**08**

Reference

1. Arthrex, Inc. *LA1-00096-EN*. Naples, FL; 2018.
2. Arthrex, Inc. *LA1-00097-EN*. Naples, FL; 2018.

FastThread™ PEEK Interference Screw

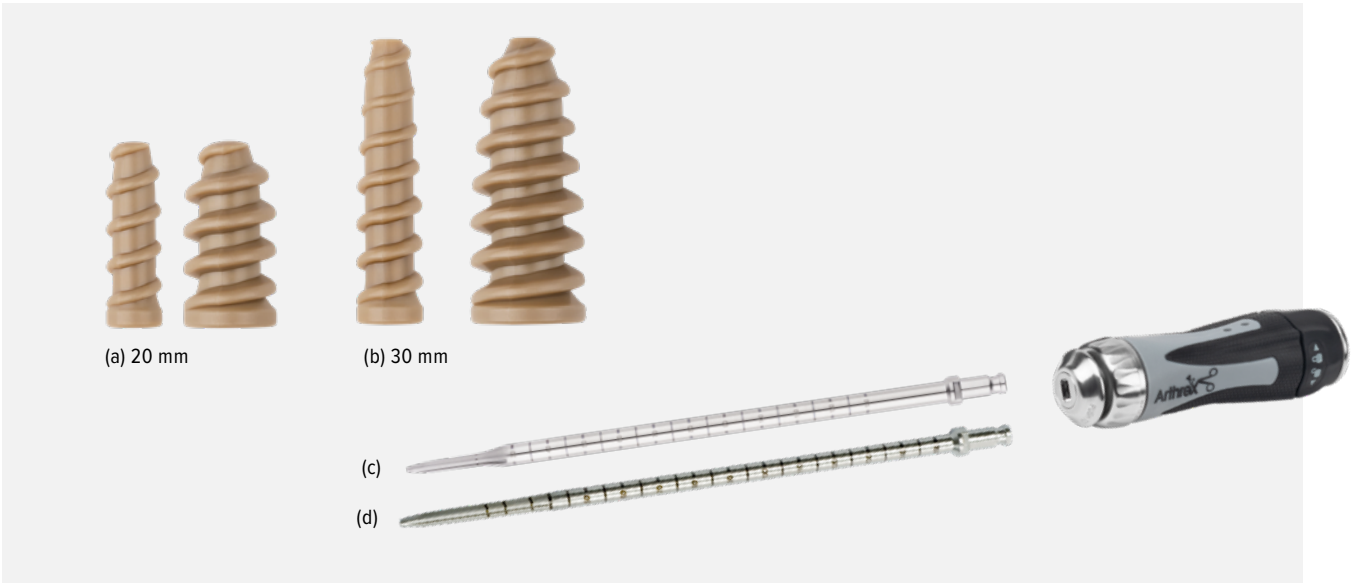

The PEEK family of FastThread interference screws offer similar advantages to the BioComposite FastThread screws, such as faster insertion, strength, and graft protection due to minimized friction against the graft. PEEK-OPTIMA material allows for insertion similar to metal screws by eliminating the need to tap.


FastThread™ PEEK Interference Screws

Product description	Item number
6 mm × 20 mm (used with 6 mm driver)	AR-**4020P-06**
7-10 mm × 20 mm screws **(a)**	AR-**4020P-07** to -**10**
7-12 mm × 30 mm screws **(b)**	AR-**4030P-07** to -**12**
SlapDriver Handle With Quick Connect Drivers	
SlapDriver, quick connect, ratcheting handle	AR-**1999SD**
Driver, for 6 mm × 20 mm screws, quick connect **(c)**	AR-**4019D-1**
Driver, for 20 and 30 mm screws, quick connect **(d)**	AR-**1996CD-1**
Drivers for 6 mm × 20 mm Screws	
Driver, fixed handle	AR-**4019D**
Drivers for 7-12 mm Screws	
Fixed handle driver for 20 mm and 30 mm screws	AR-**1996CD**
Driver, for 20 mm screws only, fixed handle	AR-**4020D**
Driver, for 20 mm screws only, quick connect **(b)**	AR-**4020D-1**
Driver, for 20 mm screws only, flexible shaft, quick connect	AR-**4020DF**
Screwdriver handle, nonratcheting	AR-**1999NR**
Screwdriver handle, ratcheting	AR-**1999**
Taps	
Taps, fixed handle, 6-10 mm	AR-**4020HT-06** to -**10**
Tap shafts, quick connect, 6-10 mm	AR-**4020T-06** to -**10**
Tap shafts, quick connect, flexible, 6-10 mm	AR-**4020TF-06** to -**10**

Previous Generation: PEEK Interference Screws

Product description	Item number
Interference screw, sheathed, PEEK, 6-10 mm × 23 mm Delta screws, 7-12 mm × 28 mm	AR-1360P to -**1400P** AR-**5028P-07** to -**12**
Round delta tapered PEEK interference screw, 9-12 mm × 35 mm	AR-**5035P-09** to -**12**

GraftBolt® Implant

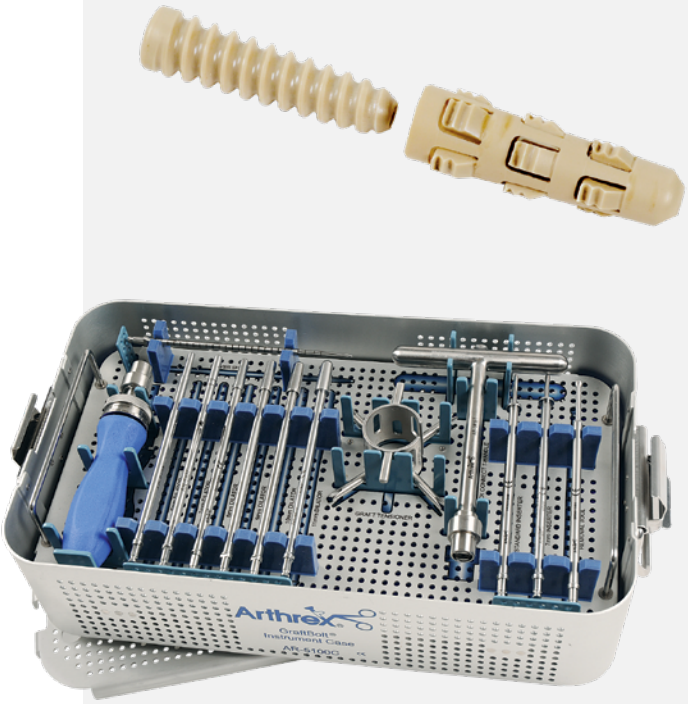

The GraftBolt is designed for tibial fixation of a soft tissue graft in cruciate ligament reconstruction procedures. The GraftBolt is available in PEEK and consists of a sheath and mating screw, which are packaged together. Both are fully cannulated. The GraftBolt instrument set includes dilators and sheath insertion and removal tools as well as the hexalobe driver for insertion of the screw.

Implants

Product description	Item number
GraftBolt®, with screw, 7-10 mm Diameter: 7, 8, 9, 10 mm	AR-**5100-07** to -**10**

Transtibial Fixation Device Instrument Set (AR-5100S)

Product description	Item number
T-handle, quick connect GraftBolt® removal tool	AR-**1416T** AR-**5102**
GraftBolt® inserter, 7 mm GraftBolt® inserter, 8-9 mm GraftBolt® inserter, 10 mm	AR-**5103** AR-**5104** AR-**5101**
GraftBolt® dilator, 6-10 mm Diameter: 6, 7, 8, 9, 10 mm	AR-**5106** to -**5110**
Graft spreader Screwdriver handle, ratcheting Driver, for 20 and 30 mm screws, quick connect	AR-**1842** AR-**1999** AR-**1996CD-1**
Accessory Instruments	
Suture tensioner, with tensiometer Tensiometer foot	AR-**1529** AR-**1530**
GraftBolt® instrument case	AR-**5100C**

Titanium Inteference Screws



All screws are precision-manufactured from titanium alloy and are fully cannulated. They are supplied sterile and individually packed. All screws are used in conjunction with a 2 mm-diameter nitinol guide wire and can be inserted with a 3.5 mm, cannulated hex screwdriver. Soft screws come with a rounded head and provide femoral graft protection. Titanium sheathed interference screws come with a disposable sheath to aid femoral insertion during transtibial ACL reconstruction. Full-thread titanium interference screws provide a secure bone block fixation. All screws can be inserted with a 3.5 mm, cannulated hex screwdriver.

Full-Thread Titanium Interference Screw (c)

Product description	Item number
Interference screw, full thread, cannulated, 7 mm × 20 mm	AR-**1370T**
Interference screw, full thread, cannulated, 7 mm × 25 mm	AR-**1371T**
Interference screw, full thread, cannulated, 7 mm × 30 mm	AR-**1372T**
Interference screw, full thread, cannulated, 8 mm × 20 mm	AR-**1380T**
Interference screw, full thread, cannulated, 8 mm × 25 mm	AR-**1381T**
Interference screw, full thread, cannulated, 8 mm × 30 mm	AR-**1382T**
Interference screw, full thread, cannulated, 9 mm × 20 mm	AR-**1390T**
Interference screw, full thread, cannulated, 9 mm × 25 mm	AR-**1391T**
Interference screw, full thread, cannulated, 9 mm × 30 mm	AR-**1392T**
Interference screw, full thread, cannulated, 10 mm × 20 mm	AR-**1400T**
Interference screw, full thread, cannulated, 10 mm × 25 mm	AR-**1401T**
Interference screw, full thread, cannulated, 10 mm × 30 mm	AR-**1402T**

Soft Screw (a)

Product description	Item number
Soft screw, cannulated, 7 mm × 25 to 35 mm (in 5 mm increments)	AR-**1370H-25** to -**35**
Soft screw, cannulated, 8 mm × 25 to 35 mm (in 5 mm increments)	AR-**1380H-25** to -**35**
Soft screw, cannulated, 9 mm × 25 to 35 mm (in 5 mm increments)	AR-**1390H-25** to -**35**
Soft screw, cannulated, 10 mm × 25 to 35 mm (in 5 mm increments)	AR-**1400H-25** to -**35**

Accessories

Product description	Item number
Guide pin, nitinol, 2 mm, with 25 and 30 mm depth markings	AR-**1254**
Guide pin, nitinol, 2 mm, with 25 and 30 mm depth markings, sterile	AR-**1254-1S**
PinLock II screwdriver, cannulated, 3.5 mm hex driver, Ø5.5 mm × 14 cm, long	AR-**1896**
Screwdriver handle, nonratcheting	AR-**1999NR**
Transtibial screwdriver shaft, cannulated, 3.5 mm hex, Ø4 mm × 19.6 cm	AR-**1998T**

Sheathed Interference Screw™ (b)

Product description	Item number
Sheathed Interference Screw™, cannulated, 6 mm × 20 mm	AR-**1360E**
Sheathed Interference Screw™, cannulated, 7 mm × 15 to 30 mm (in 5 mm increments)	AR-**1370E** to **75E**
Sheathed Interference Screw™, cannulated, 8 mm × 20 to 30 mm (in 5 mm increments)	AR-**1380E** to **82E**
Sheathed Interference Screw™, cannulated, 9 mm × 20 to 30 mm	AR-**1390E** to **92E**

ACL Backup Fixation



Arthrex offers a wide range of soft tissue fixation devices for minimally invasive primary and backup fixation for knee ligament reconstruction and repair procedures.

SwiveLock® backup ACL fixation kit (AR-1593)

Product description	Item number
SwiveLock® anchor, BioComposite, 4.75 mm	AR-**2324BCC**
Drill, spade tip	AR-**1927D**
Tap, 4.75 mm	AR-**2324PTB**
Tap, for hard bone, 5.2 mm	AR-**1593-5**
Suture Anchors	
BioComposite Corkscrew® FT, 4.5 mm × 14 mm, with two #2 FiberWire®	AR-**1927BCF-45**
BioComposite Corkscrew® FT, 5.5 mm × 14.7 mm, with two #2 FiberWire®	AR-**1927BCF**
BioComposite Corkscrew® FT, 5.5 mm × 14.7 mm, with two #2 TigerTail®	AR-**1927BCFT**
BioComposite Corkscrew® FT, with 4 needles, 5.5 mm × 14.7 mm, with two #2 FiberWire®	AR-**1927BCNF**
BioComposite Corkscrew® FT, 5.5 mm × 14.7 mm, with three #2 FiberWire®	AR-**1927BCF-3**
BioComposite Corkscrew® FT, 6.5 mm × 14.7 mm, with two #2 FiberWire®	AR-**1927BCF-65**


Suture Buttons



Titanium suture buttons with 2 or 4 holes are made for primary or backup FiberWire fixation of ACL/PCL grafts and augmenting bone bridges. Suture buttons come sterile and ready for use.

Product description	Item number
Suture button, 3,5 × 10 mm	AR-**8920**
Suture button, round, 12 mm	AR-**8922**


RetroButton® Implant

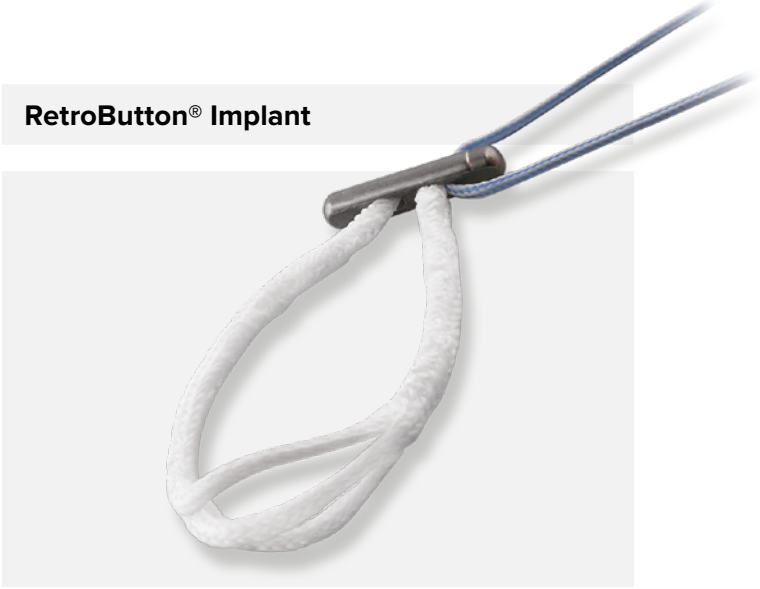

The RetroButton implant is a suture-button fixation on cortical bone. The 12 mm and 15 mm long titanium buttons pass through a small cortical pinhole without overdrilling. The GraftPro button holder attachment allows graft tensioning with the RetroButton implant in place and confirms proper loop length.

Product description	Item number
RetroButton® implant, 12 mm, with 15 up to 35 mm loop	AR-**1588-15** to AR-**1588-35**
RetroButton drill pin II	AR-**1595**
RetroButton drill pin, 3 mm	AR-**1590**
RetroButton depth guide	AR-**1270**
GraftPro® button holder	AR-**2950BH**

ACL/PCL Cortical Fixation Set

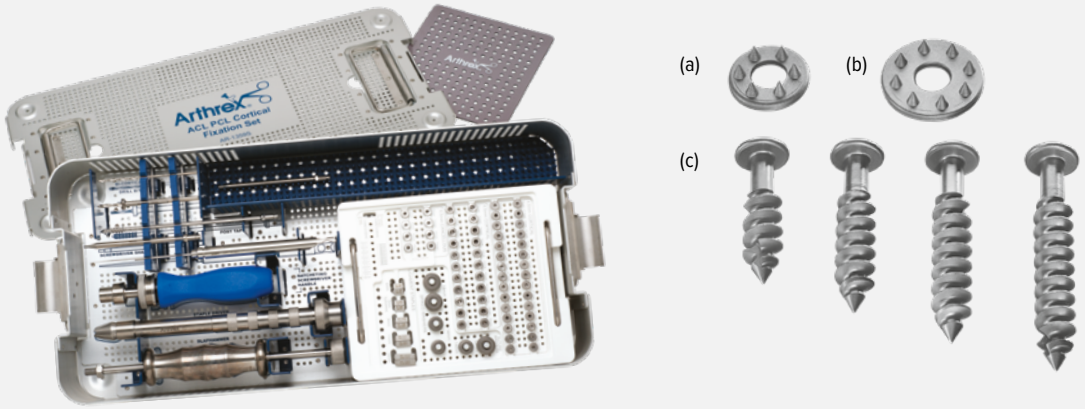

The ACL/PCL cortical fixation set combines the instruments of the bicortical low-profile post system (AR-1365S), the low-profile ligament staple driver set (AR-1005S), and the low-profile cancellous screw and washer instruments (AR-1359). The set also includes an implant caddy to hold the screws, washers, and staples (sold separately).

The system includes the 4.5 and 6.5 mm-diameter bicortical post and 6.5 mm cancellous screws. Low-profile spiked and unspiked washers, as well as ligament staples, are also included.

ACL/PCL Cortical Fixation Set (AR-1359S)

Product description	Item number
Instrumentation	
Driver, staple	AR-**1005**
Slap hammer/extractor	AR-**1005H**
Drill, cancellous screw 25 mm length	AR-**1355D**
ACL/PCL cortical fix. case	AR-**1359C**
Drill, for bicortical post	AR-**1365D**
Tap for bicortical post	AR-**1365T**
Bicortical post tap, 6.5 mm	AR-**1366T**
Bicortical Bio-Post drill bit	AR-**1367D**
Screwdriver shaft, short non-cann, 2.5 mm hex.	AR-**1995SHN**
Screwdriver shaft, short 3.5 mm hex., cannulated	AR-**1998SH**
Screwdriver handle, ratcheting	AR-**1999**
Depth device, large	AR-**8943-15**

Product description	Item number
Implants	
Bicortical posts, 4.5 mm × 27.5-50 mm, sterile (2.5 mm increments)	AR-**1365-275** to -**50**
Bicortical posts, 4.5 mm × 42.5-57.5 mm, nonsterile (2.5 mm increments)	AR-**1365NS-425** to -**575**
Washers, for cancellous screws, spiked, 14 mm, sterile **(a)**	AR-**1349**
Washers, for cancellous screws, spiked, 18 mm, sterile **(b)**	AR-**1349L**
Screw, low profile, cancellous, 6.5 mm × 25-40 mm, sterile (5 mm increments) **(c)**	AR-**1355** to -**1358**
Ligament staple, spiked, 6 mm, sterile	AR-**1006**
Ligament staple, spiked, 8 mm, sterile	AR-**1008**
Ligament staple, spiked, 11 mm, sterile	AR-**1011**
Ligament staple, spiked, 16 mm, sterile	AR-**1016**

Bio-Tenodesis™ Screw System







Backup fixation of ACL grafts using the Tenodesis screw system should be considered in situations of poor metaphyseal bone quality or when less than 1.7 Nm of insertion torque is quantified during delta screw insertion. The Bio-Tenodesis screw may be used to secure the graft end directly in a 1 cm distally drilled socket or with FiberWire alone as a screw/post substitute. The Bio-Tenodesis system is also designed for collateral ligament, PCL, or ACL reconstruction.

Bio-Tenodesis™ Master Set (AR-1675S)


Product description	Item number
Handle, tear drop, with suture cleat	AR-**2001BT**
Headed reamers, cannulated, 5-10 mm Diameter: 5, 6, 7, 8, 9, 10 mm	AR-**1405** to AR-**1410**
Drill bit, cannulated, 4 mm Drill bit, cannulated, 4.5 mm	AR-**1204L** AR-**1204.5L**
Driver, for 10 mm Tenodesis™ screw Driver, for 12 mm Tenodesis™ screw Driver, for 15 mm Tenodesis™ screw Driver, for 23 mm Tenodesis™ screw	AR-**1540DB** AR-**1670DB** AR-**1350D** AR-**1570DB**
Bio-Tenodesis™ screw instrumentation case	AR-**1675C**
Tenodesis™ screw and driver disposable pack, 5.5 mm × 15 mm	AR-**1555DS**
Disposables	
#2 FiberSnare®, #2 FiberWire®, green, 66 cm, stiffened end with closed loop, 30 cm #2 FiberLoop®, with straight needle Drill Tip Guide Pin, 2.4 × 311 mm	AR-**7209SN** AR-**7234** AR-**1250SB-1S**
Tenodesis disposables kit, qty 5	AR-**1676DS**
Tenodesis disposables kit, qty 1	AR-**1676DS-1**
Guide wire, with trocar tip and eyelet, 2.4 mm Suture-passing wire, nitinol, 450 mm #2 FiberWire®, with needle #2-0 FiberWire®, with needle #2 FiberWire® #2-0 FiberWire® #2 FiberLoop®, with needle Ruler, 150 mm	

Product description	Item number
BioComposite Tenodesis Screws	
Tenodesis screw, BioComposite, 4 mm × 10 mm	AR-**1540BC**
Tenodesis screw, BioComposite, 4.75 mm × 15 mm	AR-**1547BC**
Tenodesis screw, BioComposite, 5.5 mm × 15 mm	AR-**1555BC**
Tenodesis screw, BioComposite, 6.25 mm × 15 mm	AR-**1562BC**
Tenodesis screw, BioComposite, 7 mm × 23 mm	AR-**1570BC**
Tenodesis screw, BioComposite, 7 mm × 10 mm	AR-**1670BC**
Tenodesis screw, BioComposite, 8 mm × 12 mm	AR-**1680BC**
Tenodesis screw, BioComposite, 8 mm × 23 mm	AR-**1580BC**
Tenodesis screw, BioComposite, 9 mm × 23 mm	AR-**1590BC**
Tenodesis screw, PEEK, 4 mm × 10 mm	AR-**1540PS**
Tenodesis screw, PEEK, 4.75 mm × 15 mm	AR-**1547PS**
Tenodesis screw, PEEK, 5.5 mm × 8 mm	AR-**1655PS**
Tenodesis screw, PEEK, 5.5 mm × 10 mm	AR-**1655PS-10**
Tenodesis screw, PEEK, 5.5 mm × 12 mm	AR-**1655PS-12**
Tenodesis screw, PEEK, 5.5 mm × 15 mm	AR-**1555PS**
Tenodesis screw, PEEK, 6.25 mm × 15 mm	AR-**1562PS**
Tenodesis screw, PEEK, 7 mm × 10 mm	AR-**1670PS**
Tenodesis screw, PEEK, 7 mm × 23 mm	AR-**1570PS**
Tenodesis screw, PEEK, 8 mm × 12 mm	AR-**1680PS**
Tenodesis screw, PEEK, 8 mm × 23 mm	AR-**1580PS**
Tenodesis screw, PEEK, 9 mm × 23 mm	AR-**1590PS**

Screw Insertion and Removal

FastThread™ Interference Screw Instrumentation Set 62
Interference Screw Insertion Kit 62
Tunnel Notchers 63

FastThread™ Interference Screw Instrumentation Set

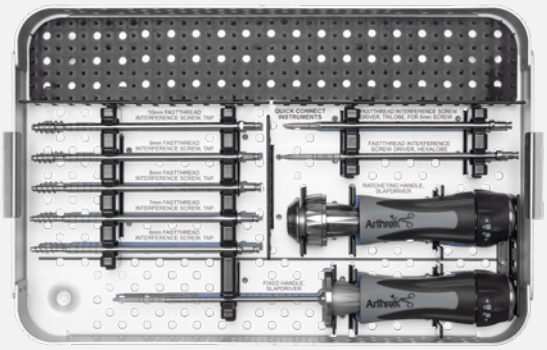


The FastThread interference screwdriver family was designed to combine the technology and reliability of our hexalobe, trilobe, and quick connect ratcheting screwdrivers with the convenience of a built-in slap-hammer mechanism to make driver removal easier and faster.

FastThread Interference Screw Instrumentation Set (AR-1996S)

Product description	Item number
SlapDriver, ratcheting quick connect handle	AR-**1999SD**
Driver, for 20 and 30 mm screws, quick connect	AR-**1996CD-1**
Driver, for 6 mm × 20 mm screws, quick connect	AR-**4019D-1**
FastThread™ interference screw tap, 6 mm FastThread™ interference screw tap, 7 mm FastThread™ interference screw tap, 8 mm FastThread™ interference screw tap, 9 mm FastThread™ interference screw tap, 10 mm	AR-**4020T-06** AR-**4020T-07** AR-**4020T-08** AR-**4020T-09** AR-**4020T-10**
FastThread™ interference screw case	AR-**1996C**


Interference Screw Insertion Kit

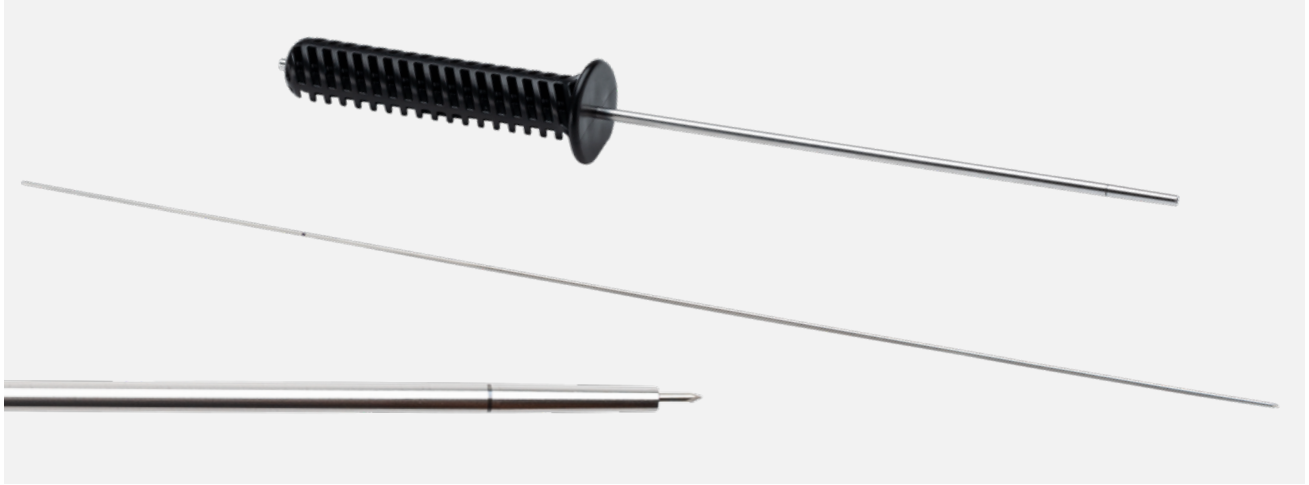

This new tunnel notching system is designed to support in screw alignment and to reduce the risk of screw breakage during anterior cruciate ligament (ACL) reconstruction.

Product description	Item number
Interference screw insertion kit, with dilator and 1.1 mm trocar-tip guide wire	AR-**1249TK**
Guide wire, trocar tip, 1.1 mm, qty 5 Guide wire, trocar tip, qty 1	AR-**1249T** AR-**1249T-1**

Tunnel Notchers

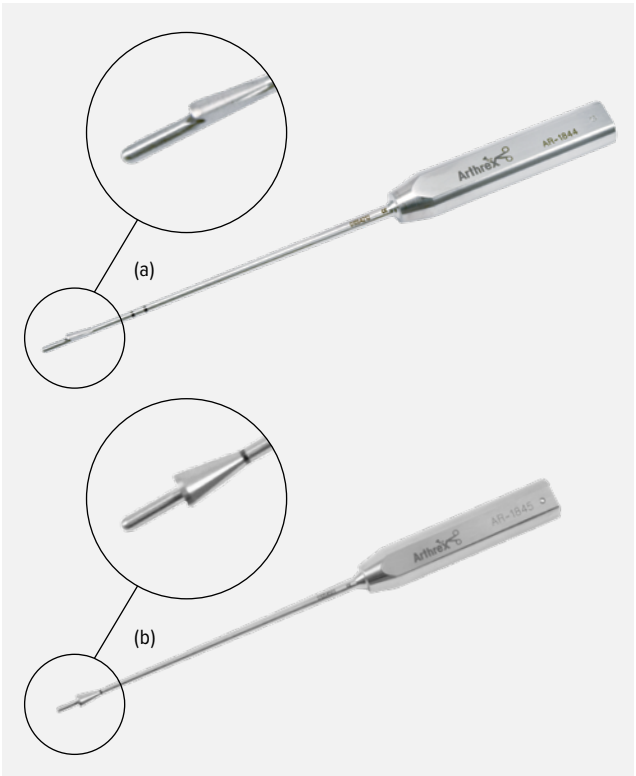


The tunnel notcher creates a perfectly sized “keyhole” in the anterior wall of the femoral tunnel to facilitate guide pin and interference screw insertion. The wider tunnel notcher for the bio-interference screw creates a broader “keyhole” in the anterior wall of the femoral tunnel to facilitate insertion of a bio-interference screw.

Product description	Item number
Tunnel notcher **(a)**	AR-**1844**
Tunnel notcher, for bio-interference screw **(b)**	AR-**1845**

PCL Reconstruction

PCL ToolBox Instrumentation Set..... 66
PCL Suture Passing..... 67

PCL ToolBox Instrumentation Set

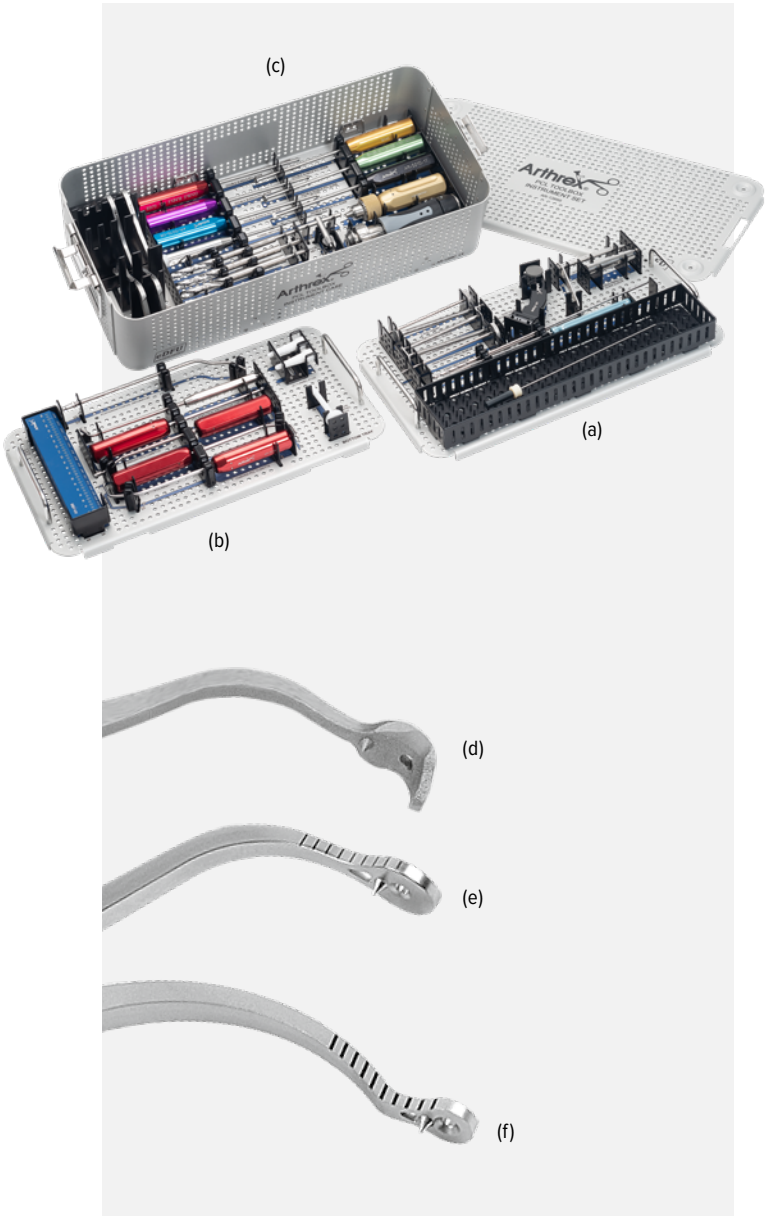

The PCL ToolBox addresses most modern PCL reconstruction techniques. The streamlined case includes three different levels. The first level of the tray holds the RetroConstruction handle with anatomic or standard femoral and tibial PCL marking hooks, drill sleeves, drill sleeve inserts, parallel guides and probe. The top level has an open pin mat area for adding other items specific to surgeons' preferences. The middle level holds curettes, rasps, a suture pusher, a popliteal protector cap, a tunnel plugs, an obturator for the cannulated tunnel plug, and a graft sizing block. The bottom tray holds the drills, reamers, a ratcheting screwdriver handle, 3 screwdriver shafts, a Jacob's chuck handle, and a chuck key.

PCL Cruciate ToolBox (AR-1269S)

Product description	Item number
Instrument case for PCL reconstruction system	AR-**1269C**
First Level of Tray **(a)**	
Hook Probe, 3.4 mm tip with 5 mm markings	AR-**10010**
Side-release RetroConstruction™ handle	AR-**1510HR**
Ratchet drill sleeve, 2.4 mm	AR-**1510FD-24**
Stepped, ratchet drill sleeve, 7 mm step	AR-**1510FS-7**
Stepped, ratchet drill sleeve, 10 mm step	AR-**1204FDS-10**
Obturator, 3.5 mm	AR-**1204F-OB**
Inserter for stepped drill sleeve, 2.4 mm	AR-**1204F-24I**
Worm curving suture passer	AR-**1268D**
Parallel guide sleeve, 2.4 mm pins	AR-**1245L**
Offset drill guide, 3.5 mm	AR-**1246-1**
Offset drill guide pin, 3.5 mm	AR-**1246-3**
Second Level of Tray **(b)**	
PCL suture pusher	AR-**1263**
PCL rasp	AR-**1264**
PCL popliteal protector cap	AR-**1267**
Graft sizing blocks, 4.5-12 mm (in 0.5 mm increments)	AR-**1886**
PCL curved curette, closed end	AR-**5013**
PCL straight curette, closed end	AR-**5014**
PCL tibial marking hook, for RetroConstruction™ drill guide **(e)**	AR-**1510PT**
Femoral PCL marking hook, for RetroConstruction™ drill guide **(f)**	AR-**1510PF**
Anatomic contour PCL guide, left **(d)**	AR-**1510PTL**
Anatomic contour PCL guide, right	AR-**1510PTR**
Tunnel plug for 8, 9, 10, 11, and 12 mm drill holes	AR-**1258**
Tibial Tunnel Cannula	AR-**1802D**
Third Level of Tray **(c)**	
Tunnel notcher, for bio-interference screw	AR-**1845**
Drill, cannulated, 9 mm	AR-**1209L**
Drill, cannulated, 10 mm	AR-**1214L**
Drill, cannulated, 11 mm	AR-**1217L**
Cannulated headed reamers, 8 mm	AR-**1408**
Cannulated headed reamers, 8.5 mm	AR-**1408.5**
Cannulated headed reamers, 9 mm	AR-**1409**
Cannulated headed reamers, 9.5 mm	AR-**1409.5**
Cannulated headed reamers, 10 mm	AR-**1410**
Cannulated headed reamers, 10.5 mm	AR-**1410.5**
Cannulated headed reamers, 11 mm	AR-**1411**
SlapDriver, ratcheting quick connect handle	AR-**1999SD**
Driver, for 20 and 30 mm screws, quick connect	AR-**1996CD-1**
Screwdriver shaft, cannulated, 3.5 mm hex, Ø5.5 mm × 17 cm	AR-**1998**
Jacobs chuck handle	AR-**1415**
Chuck key	AR-**8241**

PCL Suture Passing



The PCL curving suture passer is designed to carry graft-passing sutures through the tibial tunnel into the intercondylar notch. As the wire loop and suture exit the tube, the wire curves into the notch for good visualization and suture retrieval through the femoral tunnel. The diameter allows the curving suture passer to be pushed through a 3.5 mm hole created by the FlipCutter.

Product description	Item number
Curving suture passer, disposable	AR-**1268D**

Collateral Ligament Reconstruction and Repair

Collateral Ligament Reconstruction Set 70

Medial Collateral Ligament (MCL) Augmentation 71

Anterolateral Ligament Reconstruction Set 71

Iliotibial Band Tenodesis With FiberTag® TightRope® Implant 72

Collateral Ligament Reconstruction Set



The collateral ligament reconstruction set allows for anatomic reconstructions of individual components and main structures of the posterolateral and medial knee. For minimally invasive and open techniques performed during fibular-based reconstructions, use the unique fibular marking hook, which tightly contours the fibular head and enables surgeons to get around anatomic structures while placing the 8 mm-diameter paddle. This marking hook was designed specifically to fit onto the fibular attachment of the popliteofibular ligament (PFL).


The tibial marking hook was designed for posterolateral and medial/posteromedia tibia-based reconstructions. The ergonomic, 8 mm-diameter paddle provides tactile feedback upon entry into the posterior popliteal sulcus and confirms the zebra guide pin's exit point during posterolateral corner reconstructions.

Using the parallel drill guide, reduces divergent tunnels and allows precision placement at multiple incremental distances for medial and lateral femoral-based reconstructions.

Collateral Ligament Reconstruction Set (AR-5500S)

Product description	Item number
Fibular marking hooks	AR-**5500**
Tibial marking hook, for the posterolateral corner	AR-**5501**
Tibial popliteal marking hook	AR-**1510PT-1**
Femoral collateral marking hook	AR-**5502**
Parallel drill guide	AR-**5503**
Collateral ligament retractor	AR-**5504**
Collateral ligament rasp	AR-**5506**
RetroConstruction™ drill guide handle	AR-**1510H**
Graft sizing blocks, 4.5-12 mm (in 0.5 mm increments)	AR-**1886**
Drill, cannulated, 6 mm	AR-**1206L**
Drill, cannulated, 7 mm	AR-**1207L**
Drill, cannulated, 8 mm	AR-**1208L**
Drill, cannulated, 9 mm	AR-**1209L**
Drill, cannulated, 10 mm	AR-**1214L**
Drill, cannulated, 11 mm	AR-**1217L**
Drill, cannulated, 15 mm	AR-**1215L**
Accessories	
Zebra guide pin for isometry testing, 2.4 mm	AR-**1250Z**
ACL TightRope® drill pin, closed eyelet, 4 mm	AR-**1595TC**
ACL TightRope® drill pin, open eyelet, 4 mm	AR-**1595T**
Tunnel notcher, for bio-interference screw	AR-**1845**
#2 FiberLoop®, with straight needle	AR-**7234**
FiberStick™, #2 FiberWire®, blue, 127 cm, one end stiffened, 30 cm	AR-**7209**
Implants	
FiberTag® TightRope® implant	AR-**1588RTT**
FiberTag® TightRope® ABS implant	AR-**1588TNT**
TightRope II RT implant with deploying suture	AR-**1588RT-2J**
TightRope II RT implant with FiberTape® suture for *Internal*Brace™ technique	AR-**1588RT-IB**
TightRope II ABS implant	AR-**1588TN-20**
TightRope II ABS implant, open	AR-**1588TN-21**
ABS button, round, concave, Ø11 mm	AR-**1588TB-3**
ABS button, round, concave, Ø14 mm	AR-**1588TB-4**
ACL PEEK SwiveLock® fixation kit	AR-**1593-P**
BioComposite Corkscrew® FT, with 4 needles, 5.5 mm × 14.7 mm, with two #2 FiberWire® sutures	AR-**1927BCNF**
FastThread™ BioComposite interference screws, 6 mm × 20 mm (used with 6 mm driver)	AR-**4020C-06**
FastThread™ BioComposite interference screws, 7-10 mm × 20 mm screws	AR-**4020C-07** to -**10**
FastThread™ BioComposite interference screws, 7-12 mm × 30 mm screws	AR-**4030C-07** to -**12**

Medial Collateral Ligament (MCL) Augmentation

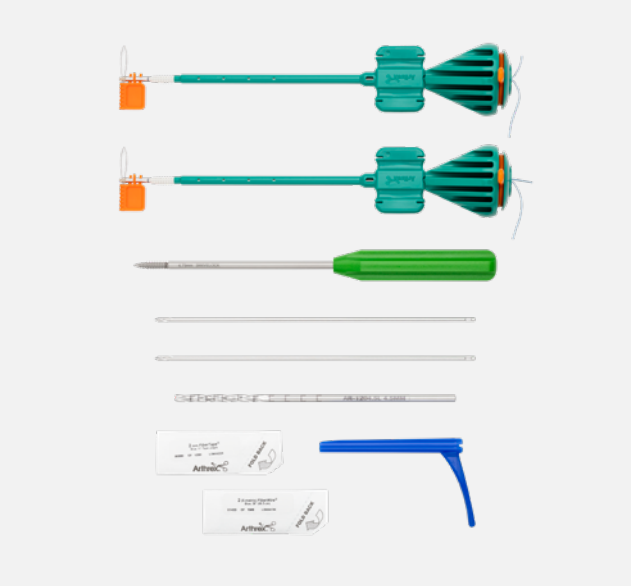

MCL *Internal*Brace ligament augmentation repairs consist of a 2 mm-wide FiberTape suture that spans the distance between 2 knotless SwiveLock anchors in order to provide protective reinforcement of primary MCL repairs.

MCL *Internal*Brace™ Kit (AR-5511-CP)

Product description	Item number
BioComposite SwiveLock® C, vented, with closed eyelet, 4.75 mm × 19.1 mm, qty 2	AR-**2324BCC-1**
Shoehorn cannula	AR-**6565**
Drill bit, cannulated, 4.5 mm	AR-**1204.5L**
Guide pins, 2.4 × 311 mm, qty 2	AR-**1250LS**
SwiveLock® punch/tap, disposable, 4.75 mm	AR-**2324PTB**
FiberTape® suture, 43.2 cm	AR-**7237**
#2 FiberWire® suture	AR-**7233**

Anterolateral Ligament Reconstruction Set



Anterolateral ligament (ALL) reconstruction can be beneficial in high-grade pivot-shift patients or when there continues to be positive pivot shift after ACL reconstruction. ALL reconstruction may also be ideal for ACL revision cases or patients who have Segond fractures. When used with the associated surgical technique (LT1-0112-EN), this instrumentation helps surgeons achieve anatomic ALL reconstruction, replicating the native ALL in position and function.

Implant System, Anterolateral Ligament Reconstruction (AR-5522)


Product description	Item number
BioComposite SwiveLock® C anchor, vented, with closed eyelet, 4.75 mm × 19.1 mm	AR-**2324BCC-1**
PEEK SwiveLock® tenodesis, 7 mm × 19.5 mm	AR-**1662PSL-7**
Guide pins, 2.4 × 311 mm, qty 2	AR-**1250LS**
Drill, cannulated, 4.5 mm	AR-**1204.5L**
Drill, cannulated, 7 mm	AR-**1207L**
SwiveLock® punch/tap, disposable, 4.75 mm	AR-**2324PTB**
#2 FiberWire® suture	AR-**7233**
#2 FiberLoop® suture, blue, with straight needle	AR-**7234**
#2 TigerLoop™, with straight needle, with TigerWire® suture	AR-**7234T**

When used with the associated surgical technique (LT2-80003-EN), this instrumentation helps surgeons achieve anatomic ALL reconstruction, replicating the native ALL in position and function.

Optional 2-Stranded Technique

Product description	Item number
Transosseous drill guide, 18 mm	AR-**5523**
Transosseous obturator, for Ø5 mm	AR-**5524**
Guide pin, 2.4 × 311 mm	AR-**1250LS**
Drill, cannulated, 5 mm	AR-**1205L**
Guide pin, nitinol, for bio-interference screws, 1.1 mm	AR-**1249**
BioComposite SwiveLock® C, vented, with closed eyelet, 4.75 mm × 19.1 mm	AR-**2324BCC-1**
BioComposite tenodesis screw, 4.75 mm × 15 mm	AR-**1547BC**
#0 FiberLoop®, with straight needle	AR-**7253**
#2 FiberWire® suture	AR-**7233**

Iliotibial Band Tenodesis With FiberTag® TightRope® Implant

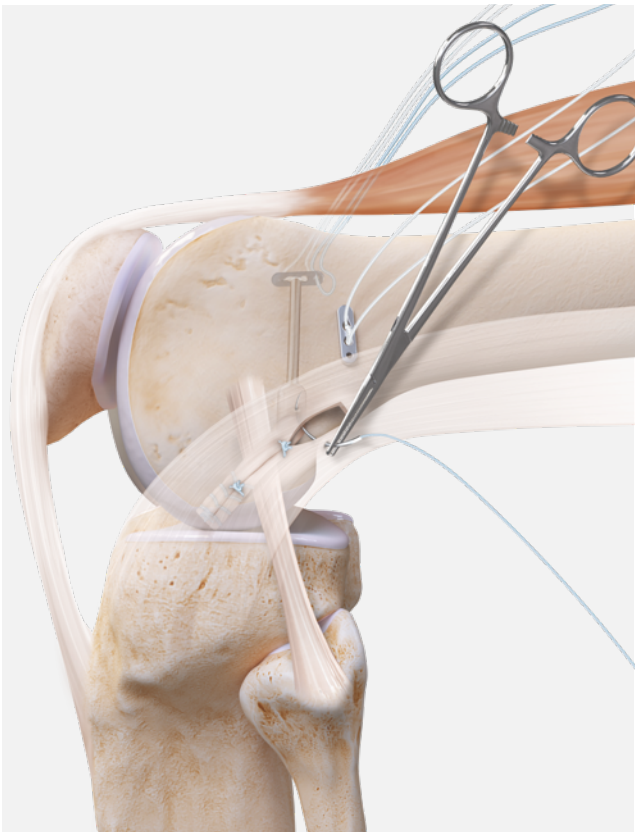

The FiberTag TightRope implant facilitates the attachment of single-stranded grafts to an ACL TightRope implant. FiberTag suture is integrated into the TightRope implant for a strong, consistent connection between the suture and TightRope loop. A simplified suturing technique, along with an innovative suture management card and the new GraftClamp graft preparation instrument, make preparing single-stranded grafts faster and more reproducible than ever.

The FiberTag TightRope implant offers several distinct advantages when compared to other fixation devices:

- Allows for precise, incremental tensioning of the graft
- Minimizes the length and size of the graft required
- Allows for smaller socket size to reduce chance of tunnel convergence with an ACL tunnel
- Allows for circumferential healing of the graft within the socket
- Cortical fixation eliminates the risk of graft laceration from an interference screw

Product description	Item number
ACL FiberTag® TightRope® implant	AR-**1588RTT**
4 mm ACL TightRope drill pin, open eyelet	AR-**1595T**
6 mm low-profile reamer, sterile	AR-**1406LP**
GraftClamp, graft preparation instrument	AR-**2386T**
#2 FiberWire® suture, 38 in, 2 strands (1 blue, 1 white/black)	AR-**7201**
#2 FiberWire® suture with tapered needle (blue)	AR-**7200**

Literature


Product description	Reference Number
Iliotibial Band Tenodesis with FiberTag TightRope Implant	LT1-000185-en-US

Patellofemoral Procedures

Medial Patellofemoral Ligament (MPFL) 76
Deepening Trochleoplasty 77
Quadriceps Tendon PARS Technique 78

Medial Patellofemoral Ligament (MPFL)

The MPFL convenience pack was developed for reconstruction of the MPFL in cases of acute patellar dislocation or chronic patellofemoral instability. These convenience packs allow the MPFL reconstruction to be accomplished in an anatomic fashion, replicating the native MPFL in position and function. The MPFL convenience pack provides a complete solution for MPFL reconstruction procedures. Each kit includes implants, instruments, and an intra-operative radiographic template for identifying the femoral origin of the MPFL for to properly position the graft in the femur.

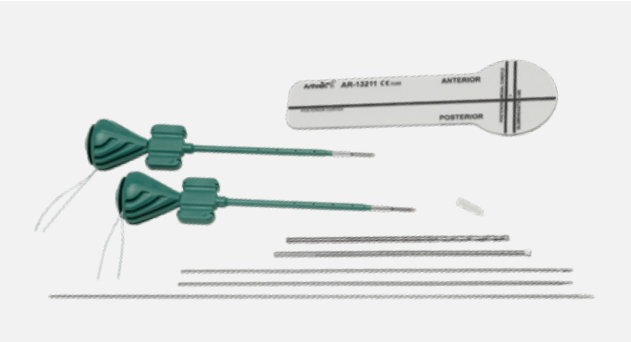


MPFL Implant System with Interference Screw (AR-1360C-CP)

Product description	Item number
MPFL template	AR-**13211**
BioComposite SwiveLock®, 4.75 mm × 19.1 mm, qty 2	AR-**2324BCC**
BioComposite interference screw, with disposable sheath, 6 mm × 23 mm	AR-**1360C**
Guide pin, with suture eyelet, 2.4 mm	AR-**1297L**
Drill tip guide pin, 2.4 mm, qty 2	AR-**1250L-1**
Reamer, low profile, 7 mm	AR-**1407LP**
Drill, cannulated, 4.5 mm	AR-**1204.5L**

MPFL Implants-Only System with Interference Screw (AR-2324BCC-CP)


Product description	Item number
MPFL template **(a)**	AR-**13211**
BioComposite SwiveLock®, 4.75 mm × 19.1 mm, qty 2	AR-**2324BCC**
BioComposite interference screw, with disposable sheath, 6 mm × 23 mm	AR-**1360C**

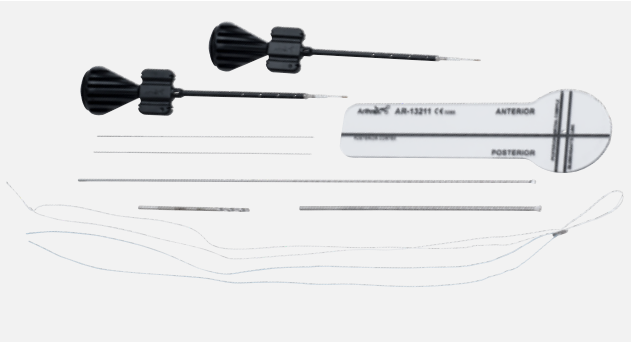

MPFL Implant System with TightRope® Implant (AR-1360CST-CP)

Product description	Item number
MPFL template	AR-**13211**
BioComposite SwiveLock®, 3.5 mm × 15.8 mm, qty 2	AR-**2325BCC**
ACL TightRope® implant	AR-**1588RT**
ACL TightRope® drill pin, closed eyelet, 4 mm	AR-**1595TC**
Drill tip guide pin, 1.1 mm, qty 2	AR-**8655K-11**
Reamer, low profile, 6 mm	AR-**1406LP**
Drill, cannulated, 3.5 mm	AR-**1531C-35**

Deepening Trochleoplasty

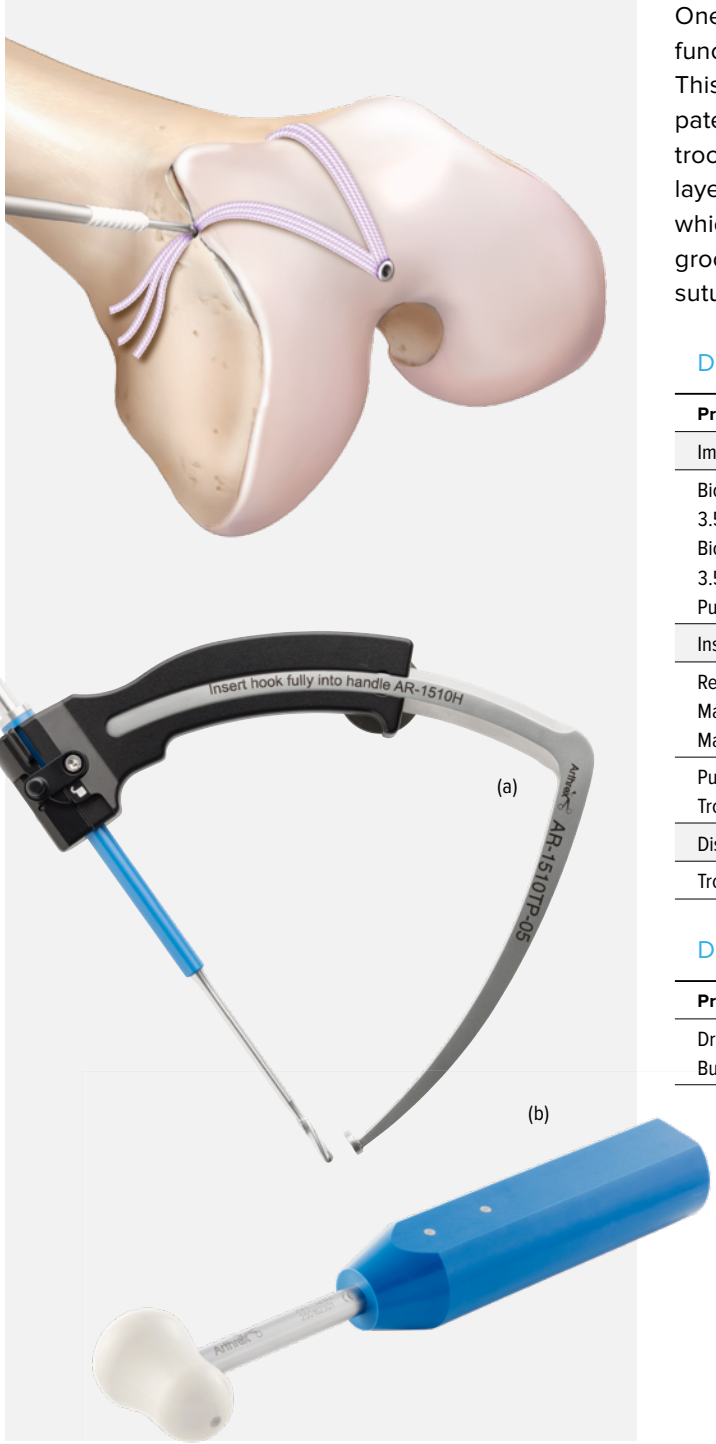

One of the most frequent causes of patellofemoral dysfunction is habitual patella dislocation or subluxation. This system is designed to solve structural causes of patellar instability through a reproducible, deepening trochleoplasty. This instrumentation allows the cartilage layer to be released using a marking hook and burr, at which point the trochlea is deepened to a more natural groove. The cartilage is reattached using a PushLock suture anchor and resorbable sutures.


Deepening Trochleoplasty

Product description	Item number
Implants	
BioComposite PushLock® suture anchor, 3.5 mm × 19.5 mm, VE 5	AR-**1926BC**
BioComposite PushLock® suture anchor, 3.5 mm × 19.5 mm, 1 EA	AR-**1926BC-1**
PushLock® suture anchor, 3.5 mm × 19.5 mm	AR-**1926PS-1**
Instrumentation	
RetroConstruction™ drill guide handle	AR-**1510H**
Marking hook, for trochleoplasty, 3 mm offset	AR-**1510TP-03**
Marking hook, for trochleoplasty, 5 mm offset **(a)**	AR-**1510TP-05**
Punch, for 3.5 mm PushLock® anchor	AR-**1926P**
Trochleoplasty tamp **(b)**	AR-**1282-01**
Disposable	
Trochleoplasty kit with 2.9 mm burr and sleeve	AR-**300-B301S**

Disposable Kit (AR-300-B301S)

Product description	Item number
Drill sleeve, for trochleoplasty, inner Ø4.5 mm	-----
Burr, straight, 2.9 mm × 162 mm	-----

Quadriceps Tendon PARS Technique

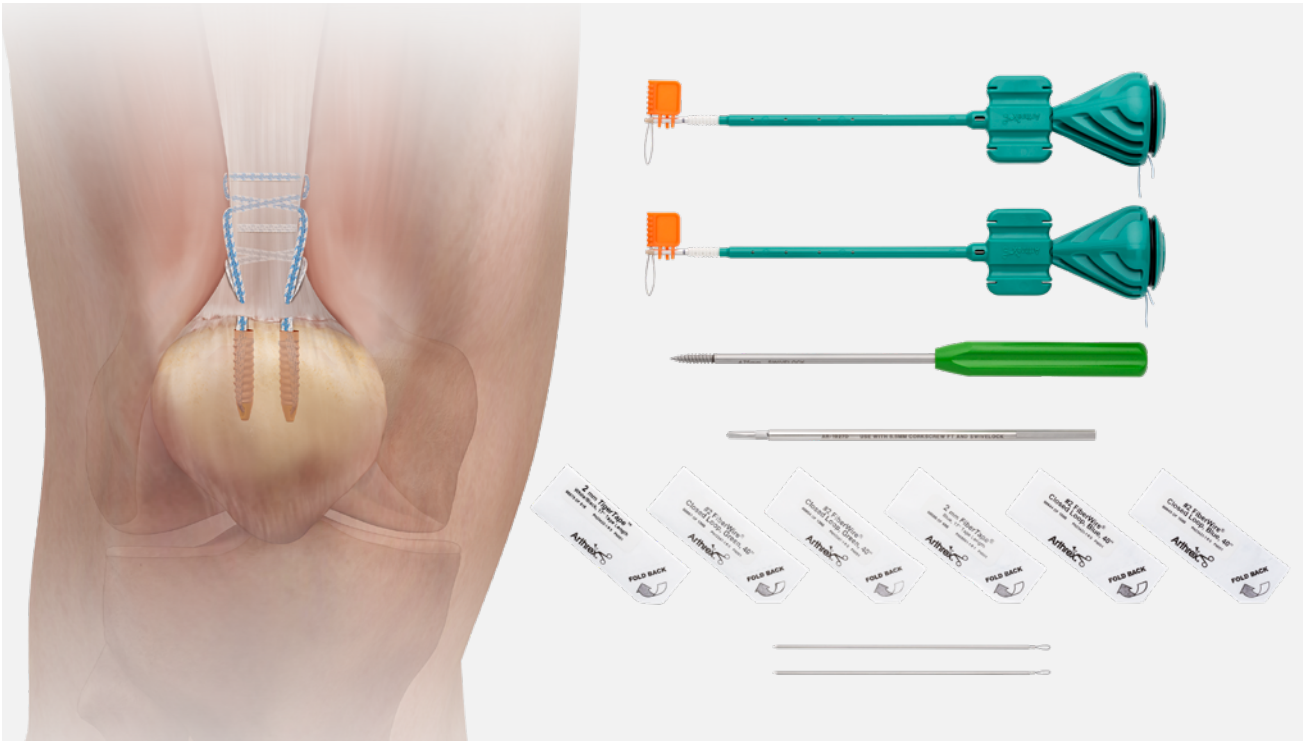

Ruptures of the quadriceps and patellar tendons are common in elite and recreational athletes. Most surgeons treat these injuries surgically to lessen the risk of long-term disability and morbidity. Historically, open techniques have been used for rupture repairs but may be complicated by wound-healing issues and infection. The minimally invasive Percutaneous Achilles Repair System (PARS) technique can be used to treat quadriceps, patellar, and Achilles tendon ruptures.

The PARS system helps facilitate consistently reliable capture of the distal aspect of the quadriceps tendon and includes color-coded FiberWire and FiberTape sutures. The anatomically contoured guide is reusable, while the suture and passing needles come packaged in a convenient kit. The PARS system provides the option of using transverse or locking sutures or both. The colored FiberWire sutures offer a more organized approach to identifying and securing matched pairs.

PARS Jig Instrument Set (AR-8860S)

Product description	Item number
PARS jig	AR-**8860J**
PARS tendon elevator	AR-**8860J-01**
Driver handle, AO connection, cannulated	AR-**13221AOC**
PARS repair instrument case	AR-**8860C**


Implants / Instruments

Product description	Item number
#2 FiberTape® suture, blue, 96.5 cm	AR-**7237-7**
#2 FiberTape® suture, white/black, 96.5 cm, qty 2	AR-**7237-7T**
#2 FiberTape® suture, blue, 101.6 cm, with loops, qty 2	AR-**7235**
#2 FiberTape® suture, green, 101.6 cm, with loops	AR-**7209SN**
2 Eye needles, qty 2	**3180**
Drill, spade tip	AR-**1927D**
One punch/tap	AR-**2324PTB**
SwiveLock® anchor, BioComposite, 4.75 mm, qty 2	AR-**2324BCC**

Meniscal Repair

FiberStitch™ All-Inside Meniscal Repair 82
ZoneNavigator™ System 83
Meniscal Repair Needles 83
Knee Scorpion™ Suture Passer 84
Meniscal Root Marking Hooks 84
Meniscal Root Repair 85
Meniscal Repair and Resection Set 85
QuickPass™ SutureLasso™ for Meniscal Ramp Lesions 86
Micro SutureLasso™ 86
Meniscal Repair Accessories 87
Meniscal Viper™ 87
Protector™ – Inside-Out Suture Repair 87

FiberStitch™ All-Inside Meniscal Repair

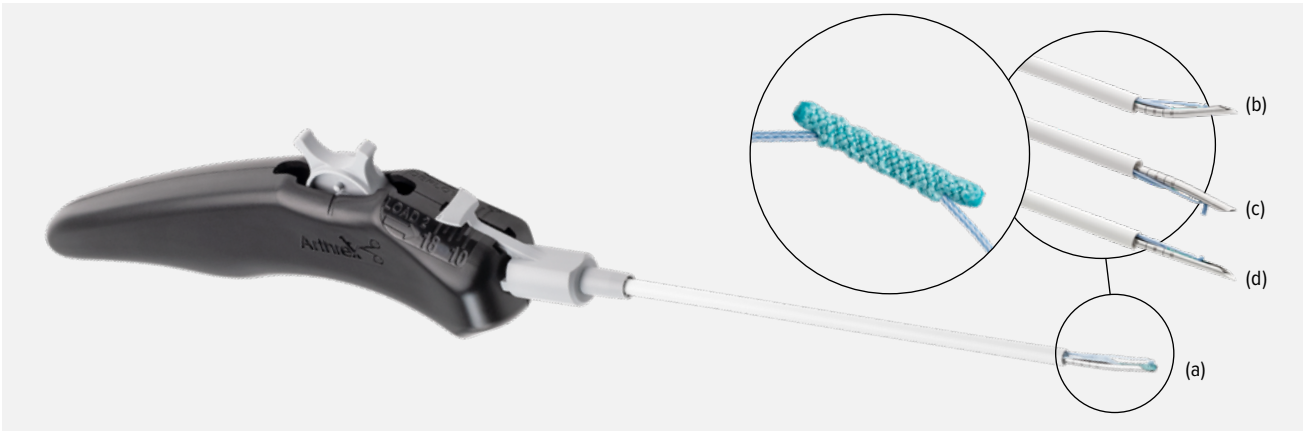


The FiberStitch implant is an innovative all-inside meniscal repair system that replaces hard PEEK implants with soft suture sheaths. The FiberStitch delivery system offers 4 different tip curves to accommodate various meniscus tear configurations: 12° up curve, 24° up curve, 12° reverse curve, and straight.

A #2-0 coreless FiberWire® suture and a pretied sliding knot provide secure arthroscopic all-suture meniscus repair. The ergonomic handle is designed for single-handed implant delivery and active implant deployment technology minimizes needle exposure beyond the meniscus, eliminating the need to past-point the needle.

Product description	Item number
FiberStitch™ implant, 12° up curved **(a)**	AR-**4570**
FiberStitch™ implant, 24° up curve **(b)**	AR-**4570-24**
FiberStitch™ implant, 12° reverse curve **(c)**	AR-**4570R**
FiberStitch™ implant, straight **(d)**	AR-**4570S**
Accessories	
Knot pusher/suture cutter, with portal skid **(e)**	AR-**5845**
Portal skid	AR-**4505**
Knot pusher / suture cutter	AR-**5815**
Portal skid, reusable	AR-**6506LP**
#2-0 suture cutter, straight, Ø2.75 mm, with FlushPort	AR-**11790F**
#2-0 suture cutter, 15° up, Ø2.75 mm, with FlushPort	AR-**11791F**
Arthroscopic measurement probe, 60°, 220 mm	AR-**4070-01**
Meniscus repair rasp	AR-**4130**
Probe hook, 150 mm shaft, 3.4 mm tip, with 5 mm markings	AR-**10010**
Optional PEEK Implant	
Meniscal Cinch II	**AR-4501**



ZoneNavigator™ System

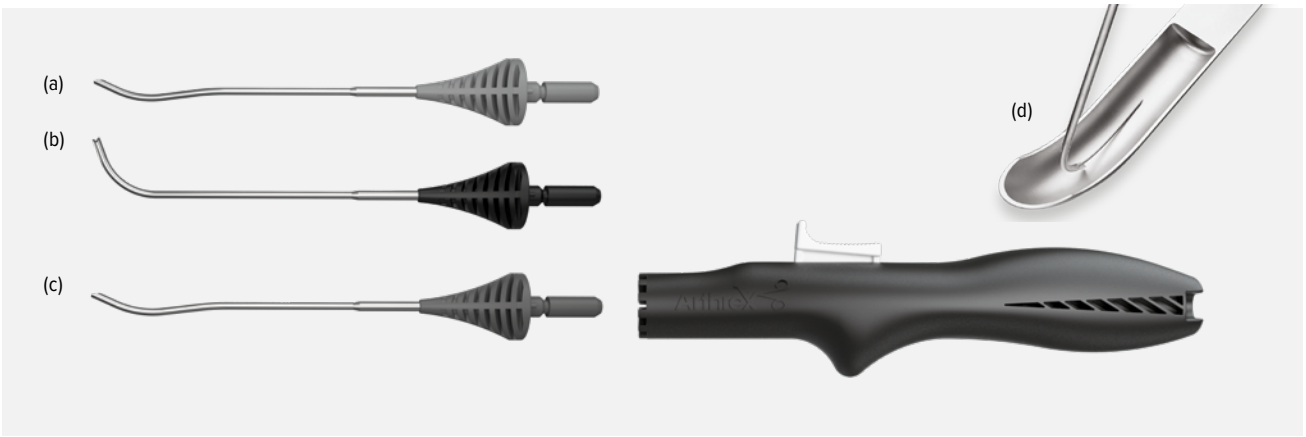


The ZoneNavigator system precisely places suture for inside-out meniscal repair. Three interchangeable cannulas are available to reach any portion of the meniscus to pass vertical or horizontal mattress sutures on the superior or inferior aspect of the meniscus. The ergonomic handle allows a controlled needle advancement.

Product description	Item number
ZoneNavigator™ system handle	AR-**7900**
ZoneNavigator™ system anterior cannula **(a)**	AR-**7905**
ZoneNavigator™ system cannula, left posterior **(b)**	AR-**7910L**
ZoneNavigator™ system cannula, right posterior **(c)**	AR-**7910R**
Needle catcher **(d)**	AR-**6660**

Mini SutureTape

Product description	Item number
#2-0 Mini SutureTape meniscal repair needles, qty 2	AR-**7523**

Meniscal Repair Needles

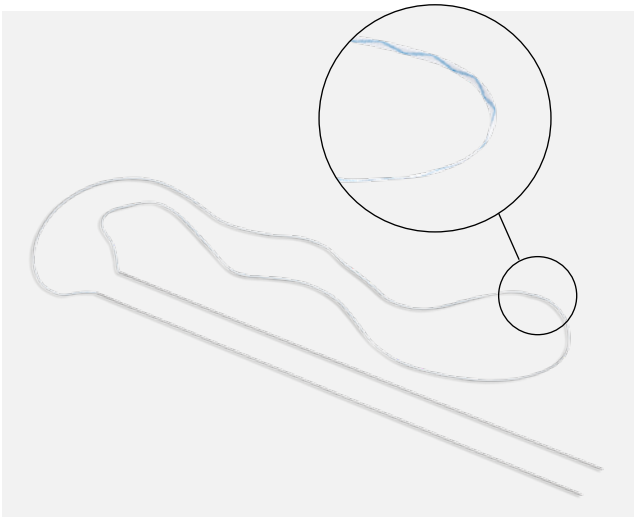

The FiberWire suture meniscal repair needles are made of standard-length stainless steel with a 96.5 cm length of #2-0 FiberWire suture or Mini SutureTape. The Mini SutureTape disperses the compressive force across a larger area compared to round suture. This allows surgeons to perform standard inside-out meniscal repair with all the benefits of FiberWire suture and SutureTape.

Product description	Item number
#2-0 Mini SutureTape meniscal repair needles #2-0 Mini SutureTape, no needles	AR-**7523** AR-**7521**
#2-0 FiberWire® suture meniscal repair needles, qty 2 #2-0 FiberWire® suture meniscal repair needles, small, qty 2	AR-**7223** AR-**7223SM**

Knee Scorpion™ Suture Passer




The low-profile Knee Scorpion suture passer allows access in tight recesses of the knee for passing #0 and #2-0 FiberWire suture or 0.9 mm Mini SutureTape. Ergonomically designed for 1-handed use, the Knee Scorpion suture passer adds simplicity to suture passing, efficiently passing and retrieving suture in 1 step. Achieve a variety of suture configurations for soft-tissue repair and fixation using the Knee Scorpion suture passer.

Product description	Item number
Scorpion™ suture passer, knee	AR-**12990**
Needles, for Scorpion™ suture passer, knee	AR-**12990N**

Mini SutureTape

Product description	Item number
FiberLink™, SutureTape, white/blue, 0.9 mm, with closed loop	AR-**7559**
TigerLink™, SutureTape, white/black, 0.9 mm, with closed loop	AR-**7559T**

Meniscal Root Marking Hooks

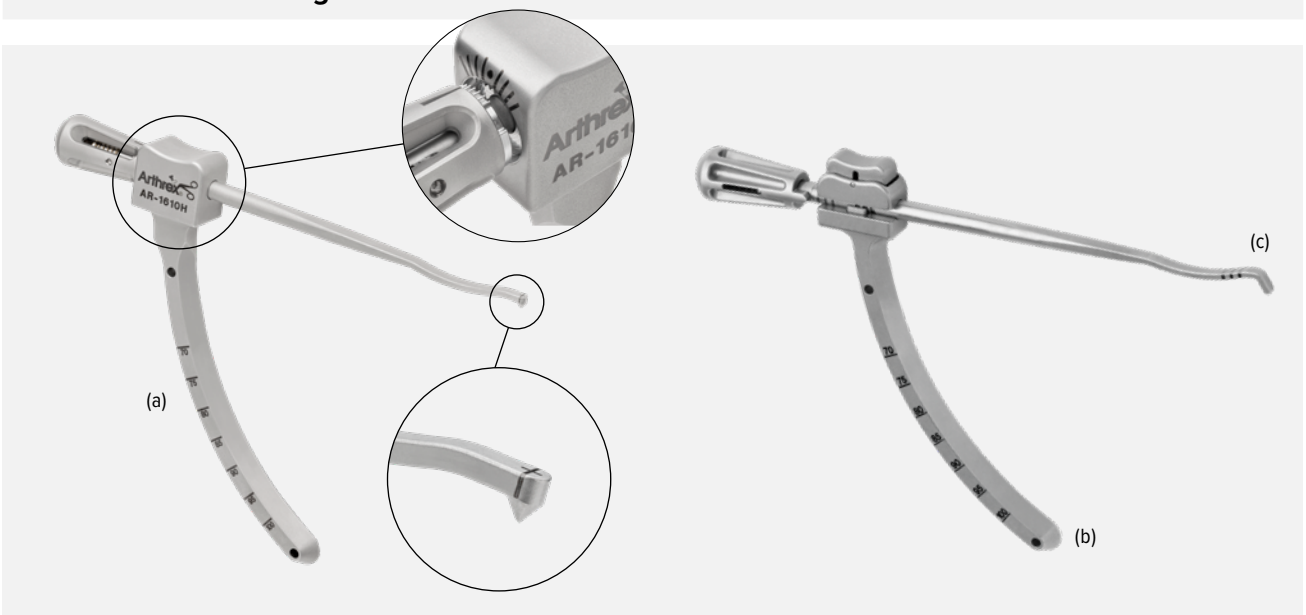

Arthrex offers two meniscus root marking hooks based on surgeon preference. Each hook has a low-profile tip to avoid damaging intact anatomy while referencing the meniscal root footprint. The point-to-point guide allows to directly target the drill location, while the over-the-back guide sits over the back of the tibia to provide a 2-point fixation for stable drilling. With each marking hook a drill trajectory can be defined to work around ACL bone sockets. Final drilling is done using either a FlipCutter reamer or a cannulated drill.

Product Description	Item Number
Point-to-Point Meniscal Root Marking Hook **(a)**	AR-**1610H**
Locking guide **(b)**	AR-**1610LG**
Meniscal root marking hook **(c)**	AR-**1610MR**

Meniscal Root Repair



The kits offer all needed instruments and implants to complete a meniscal root repair through a transtibial tunnel. Prepare the bone socket and create a transtibial tunnel using the FlipCutter II reamer. Use the auto-claveable Knee Scorpion to pass sutures through the meniscus. Easily shuttle sutures using the nitinol wire in the 2.4 mm SutureLasso needle. Secure the repair with a 4.75 mm PEEK SwiveLock anchor (AR-4550P) or a Suture Button (AR-4550).


Meniscal Root Repair Kit With PEEK SwiveLock® Anchor (AR-4550P)

Product description	Item number
Knee Scorpion™ needle	AR-**12990N**
FlipCutter® II reamer, 6 mm	AR-**1204AF-60**
PassPort Button™ cannula, 8 mm × 3 cm	AR-**6592-08-30**
#2-0 FiberStick™ sutures, qty 2	AR-**7222**
SutureLasso™ needle, with nitinol passing wire	AR-**4560**
#0 FiberLink™ suture	AR-**7258**
#0 TigerLink™ suture	AR-**7258T**
PEEK SwiveLock® anchor, 4.75 mm × 19.1 mm	AR-**2324PCT-1**
Drill bit, spade tip	AR-**1927D**
SwiveLock® anchor tap, for hard bone	AR-**1593-5**

Meniscal Root Repair Kit (AR-4550)

Product description	Item number
Knee Scorpion™ needle	AR-**12990N**
FlipCutter® II reamer, 6 mm	AR-**1204AF-60**
PassPort Button™ cannula, 8 mm × 3 cm	AR-**6592-08-30**
#2-0 FiberStick™ sutures, qty 2	AR-**7222**
SutureLasso™ needle, with nitinol passing wire	AR-**4560**
Suture button, 2-hole, 3.5 mm	AR-**8920**
#0 FiberLink™ sutures, qty 2	AR-**7258**
Optional Accessories	
SutureLasso™ needle, qty 1	AR-**4560-1**
SutureLasso™ needle, qty 5	AR-**4560**

Meniscal Repair and Resection Set

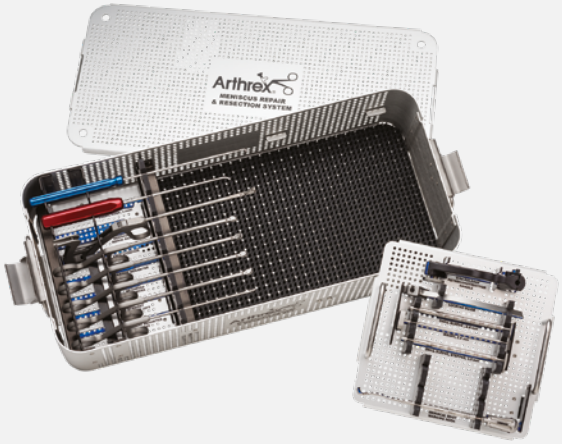


The meniscal repair and resection set contains the most popular instruments for addressing various meniscus procedures including meniscal root repair, all-suture meniscal repair, and meniscal contouring. The instruments are held securely within the slotted silicone pads for protection. A removable shelf uncovers an open space for placement of additional instrumentation.

Meniscal Repair and Resection Set Case (AR-4555C)

Product description	Item number
Meniscal root marking hook	AR-**1610MR**
Locking guide, for meniscal root marking hook	AR-**1610LG**
Knee Scorpion™ suture passer	AR-**12990**
Mini suture retriever, straight, 2.75 mm	AR-**11540F**
Mini suture retriever, 15° up curved, with FlushPort	AR-**11550F**
MegaBiter™ resector, straight	AR-**41006**
MegaBiter™ resector, up-curved	AR-**41026**
MegaBiter™ resector, straight left	AR-**41006L**
MegaBiter™ resector, straight right	AR-**41006R**
Hook probe, 3.4 mm	AR-**10010**
Meniscal repair rasp	AR-**4130**
RetroConstruction™ handle, side release	AR-**1510HR**
Drill sleeve, for side-release handle, ratcheting, 2.4 mm	AR-**1510FD-24**
Stepped drill sleeve, for side-release handle, ratcheting	AR-**1510FS-7**
Guide pin sleeve, for stepped drill sleeve, 2.4 mm	AR-**1204F-24I**


QuickPass™ SutureLasso™ for Meniscal Ramp Lesions

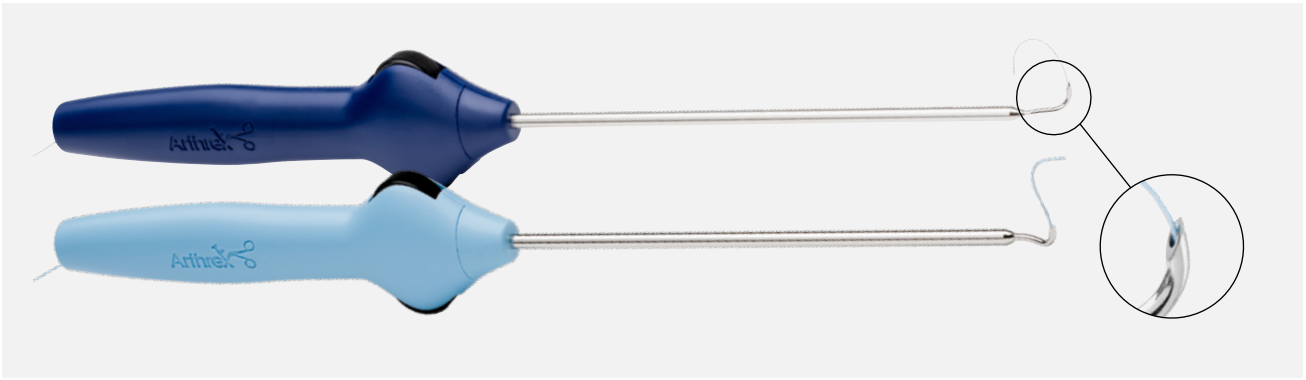

A meniscal ramp lesion is a disruption of the meniscotibial ligament and the posteromedial meniscus in the meniscocapsular zone. The QuickPass SutureLasso can be used via a posteromedial portal. It is anatomically, 25° curved with a 1.5 mm tip to precisely and safely treat the location of the ramp lesion. The SutureLasso is pre-loaded with a #2-0 FiberStick and is available in 2 versions, right and left.

Product description	Item number
QuickPass™ SutureLasso™ suture passer, 25°, curved left	AR-**6068-25L**
QuickPass™ SutureLasso™ suture passer, 25°, curved right	AR-**6068-25R**


Micro SutureLasso™

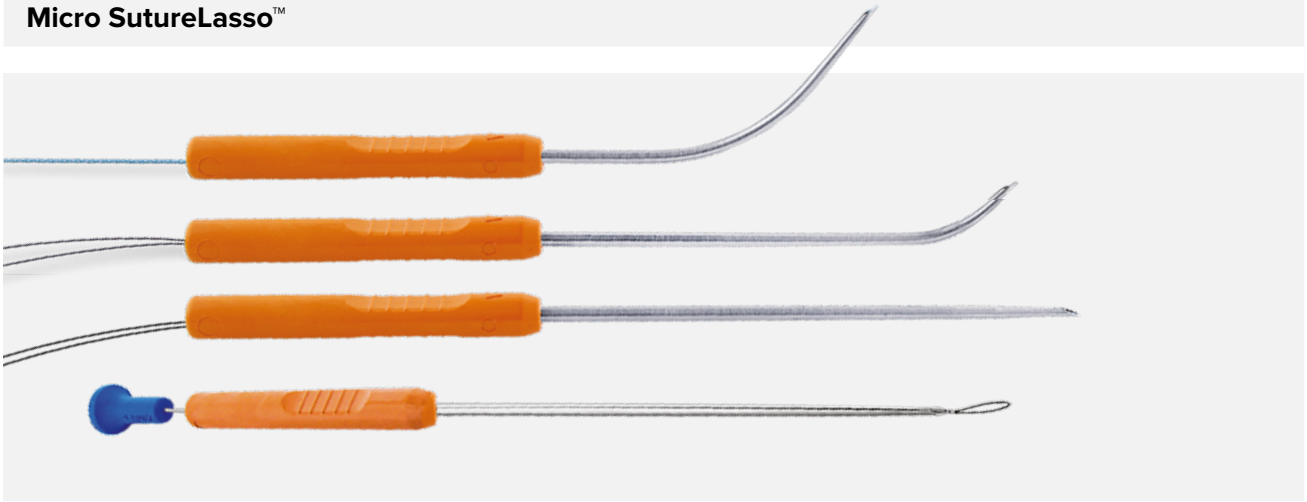

The Micro SutureLasso instrument, a 15 cm-long cannulated stainless steel shaft with an ergonomic handle, facilitates the placement of simple mattress stitches to repair various meniscal tears using an outside-in approach. These strong, stainless steel needles come preloaded with a braided nitinol wire to be used as a suture shuttle and are available in small-curve, large-curve, and straight configurations for accessing hard-to-reach areas. As an alternative, all FiberSticks can be passed along the Micro SutureLassos with ease.

Product description	Item number
Micro SutureLasso™	
Micro SutureLasso™, minor bend	AR-**8701**
Micro SutureLasso™, major bend	AR-**8702**
Micro SutureLasso™, straight	AR-**8703**
Suture retriever, for SutureLasso™, sterile	AR-**8701SR**
Optional Accessories	
FiberStick™, #2 FiberWire®, blue, 127 cm, one end stiffened, 30 cm	AR-**7209**
#2 TigerStick®, #2 TigerWire®, white/black, 127 cm, one end stiffened, 30 cm	AR-**7209T**
#2-0 Mini SutureTape, no needles	AR-**7521**
#2-0 FiberStick™, #2-0 FiberWire®, blue, 127 cm, one end stiffened, 30 cm	AR-**7222**
SutureLasso™ needle, qty 1	AR-**4560-1**
SutureLasso™ needle, qty 5	AR-**4560**


Meniscal Repair Accessories

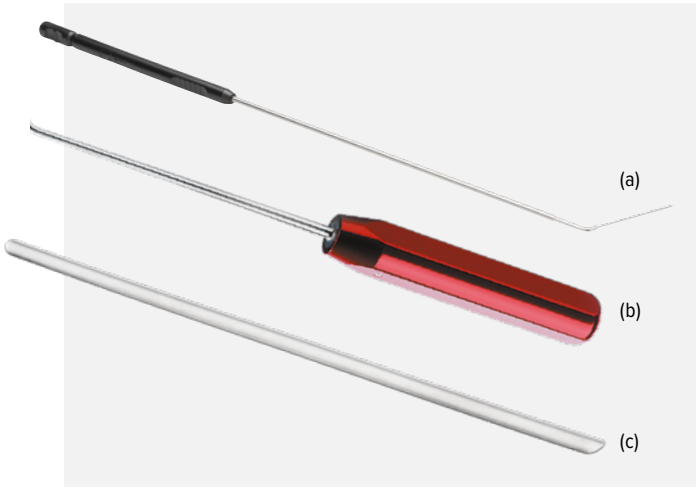

Use the malleable Meniscal Dart measuring probe to measure the width of the meniscus. The angled tip of the meniscus repair rasp is ideally shaped to access inside the meniscal tear for debridement prior to the repair. The malleable portal skid can be used to clear access into the knee joint and can be bent for anatomical customization.

Product description	Item number
Arthroscopic measurement probe, 60° **(a)**	AR-**4070-01**
Arthroscopic measurement probe, 70°	AR-**4070-70S**
Meniscal repair rasp **(b)**	AR-**4130**
Probe hook, 3.4 mm tip, 150 mm shaft, with 5.0 mm markings	AR-**10010**
Portal skid **(c)**	AR-**4505**


Meniscal Viper™

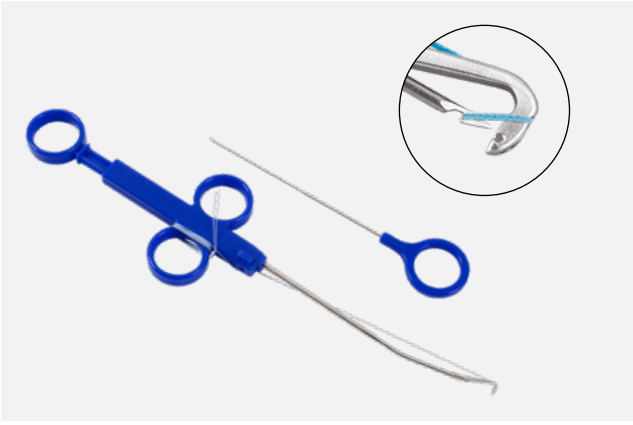

The sterile meniscal Viper repair kit provides a method of passing suture to repair posterior horn meniscal tears. Each sterile kit contains a meniscal Viper preloaded with #2-0 FiberWire and a small knot pusher.

Product description	Item number
Meniscal Viper™ repair kit, small, disposable	AR-**13920DS**
Meniscal Viper™ repair kit, medium, disposable	AR-**13930DS**
Accessories	
Meniscal repair rasp	AR-**4130**
Suture cutter, 15° up curved, #2-0 suture only, reusable	AR-**11791F**
Shoehorn cannula, 6 mm ID × 9 cm, qty 5	AR-**6565**

Protector™ – Inside-Out Suture Repair

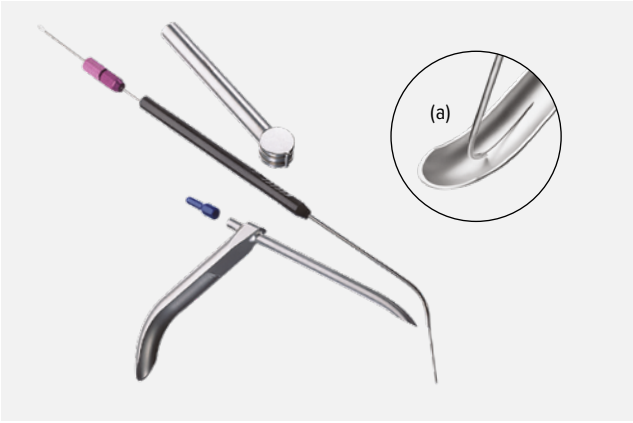

The Protector meniscal suturing set provides a safe, versatile system to perform either inside-out or all-inside meniscal suturing. The malleable, single-use curved cannula and integrated plastic handle has a nitinol needle and a needle pusher for convenience.

Protector™ Meniscal Suturing Kit (AR-4060S)

Product description	Item number
Cannula, malleable, curved, with handle	----
Needle, nitinol, with wire loop	AR-**1291S**
Needle holder, adjustable	----
Accessories	
Needle catcher **(a)**	AR-**6660**
Cannula bending tool	AR-**6650**
#2-0 Mini SutureTape, no needles (recommended suture)	AR-**7521**

Meniscectomy Hand Instruments

Arthroscopic Meniscectomy Instrument Set 90
MegaBiter™ Tissue Resection Series 91
Nano Instruments 91

Arthroscopic Meniscectomy Instrument Set



The lightweight arthroscopic meniscectomy instrument set contains the most popular hand instruments. The anodized aluminum case can safely store up to 20 arthroscopy instruments, which are held securely in slotted silicone pads with the tips in the open position for protection and easy identification.

Arthroscopic Meniscectomy Instrument Set (AR-2200CS)

Product description	Item number
Probe, hook, Ø3.4 mm tip, with 5 mm markings	AR-**10010**
Punch, slender straight tip, straight shaft, Ø2.75 mm	AR-**11100F**
Punch, large straight tip, straight shaft, Ø2.75 mm	AR-**11200F**
Grasper, mini straight tip, 15° up curved shaft, Ø2.75 mm, with NR handle	AR-**11910NRF***
Punch, standard straight tip, straight shaft, Ø3.4 mm	AR-**12000F**
Scissors, serrated tooth straight tip, straight shaft, Ø3.4 mm	AR-**12140F**
WideBiter™ punch, 15° up tip, 15° up curved shaft, Ø3.4 mm	AR-**12241**
Grasper, blunt straight tip, straight shaft, Ø3.4 mm, with NR handle	AR-**12500NRF***
Punch, medium reverse straight tip, straight shaft, Ø3.4 mm	AR-**12530F**
Punch, medium 45° right angled tip, straight shaft, Ø3.4 mm Punch, medium 45° left angled tip, straight shaft, Ø3.4 mm	AR-**12800F** AR-**12810F**
WideBiter™ punch, 90° right rotary tip, straight shaft, Ø3.4 mm WideBiter™ punch, 90° left rotary tip, straight shaft Ø3.4 mm	AR-**12912F** AR-**12913F**
Punch, rotary with scoop 90° right tip, straight shaft Ø3.4 mm Punch, rotary with scoop 90° left tip, straight shaft Ø3.4 mm	AR-**12940F** AR-**12950F**
Grasper, alligator hook tip, straight shaft, Ø4.2 mm, with NR handle	AR-**13600NRF***
MegaBiter™ resector, straight tip, 5.5 mm × 2.5 mm MegaBiter™ resector, up curved tip, 5.5 mm × 2.5 mm MegaBiter™ resector, straight tip, left cut, 5.5 mm MegaBiter™ resector, straight tip, right cut, 5.5 mm	AR-**41006** AR-**41026** AR-**41006L** AR-**41006R**
Hand instrument case, 20 slots	AR-**2200C**

* SR graspers are available upon request at no additional charge.


MegaBiter™ Tissue Resection Series



The MegaBiter resector has transformed meniscal resection with its large, 5.5 mm bite width. Its low-profile design helps reach tight recesses in joint spaces. The straight MegaBiter resector provides the same bite width without the curved tip, allowing access to tissue in tighter joint spaces. The open, slotted shaft allows easy and efficient instrument cleaning and does not require a FlushPort connection.

Product description	Item number
MegaBiter™, straight jaw, 5.5 mm × 2.5 mm **(a)**	AR-**41006**
MegaBiter™, curved jaw, 5.5 mm × 2.5 mm **(b)**	AR-**41026**
MegaBiter™, straight shaft, left cut, 5.5 mm **(c)**	AR-**41006L**
MegaBiter™, straight shaft, right cut, 5.5 mm **(d)**	AR-**41006R**

Nano Instruments

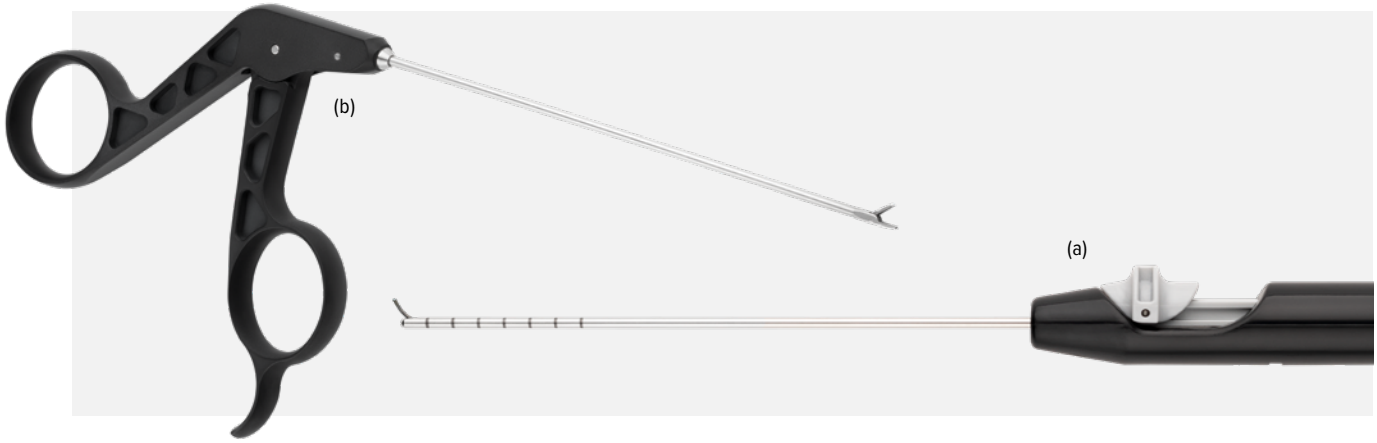


Harnessing 20 years of engineering excellence in designing arthroscopic hand instrumentation, Arthrex has produced the next generation in tissue resection and extraction instruments that are sharp and strong enough to resect and remove meniscal tissue. The low-profile tip design facilitates safe introduction into most tight joint spaces without the need for a limb holder.

Product description	Item number
NanoScope™ probe **(a)**	AR-**10100N**
NanoGrasper, straight, disposable, 130 mm **(b)**	AR-**10913D-1**
NanoScissor, straight, disposable, 130 mm	AR-**10915D-1**
NanoBiter, straight, disposable, 130 mm	AR-**10911D-1**
NanoBiter, 15° up, disposable, 130 mm	AR-**10922D-1**

Cartilage Regeneration


AutoCart™ All Autologous Cartilage Regeneration 94

AutoCart™ All Autologous Cartilage Regeneration

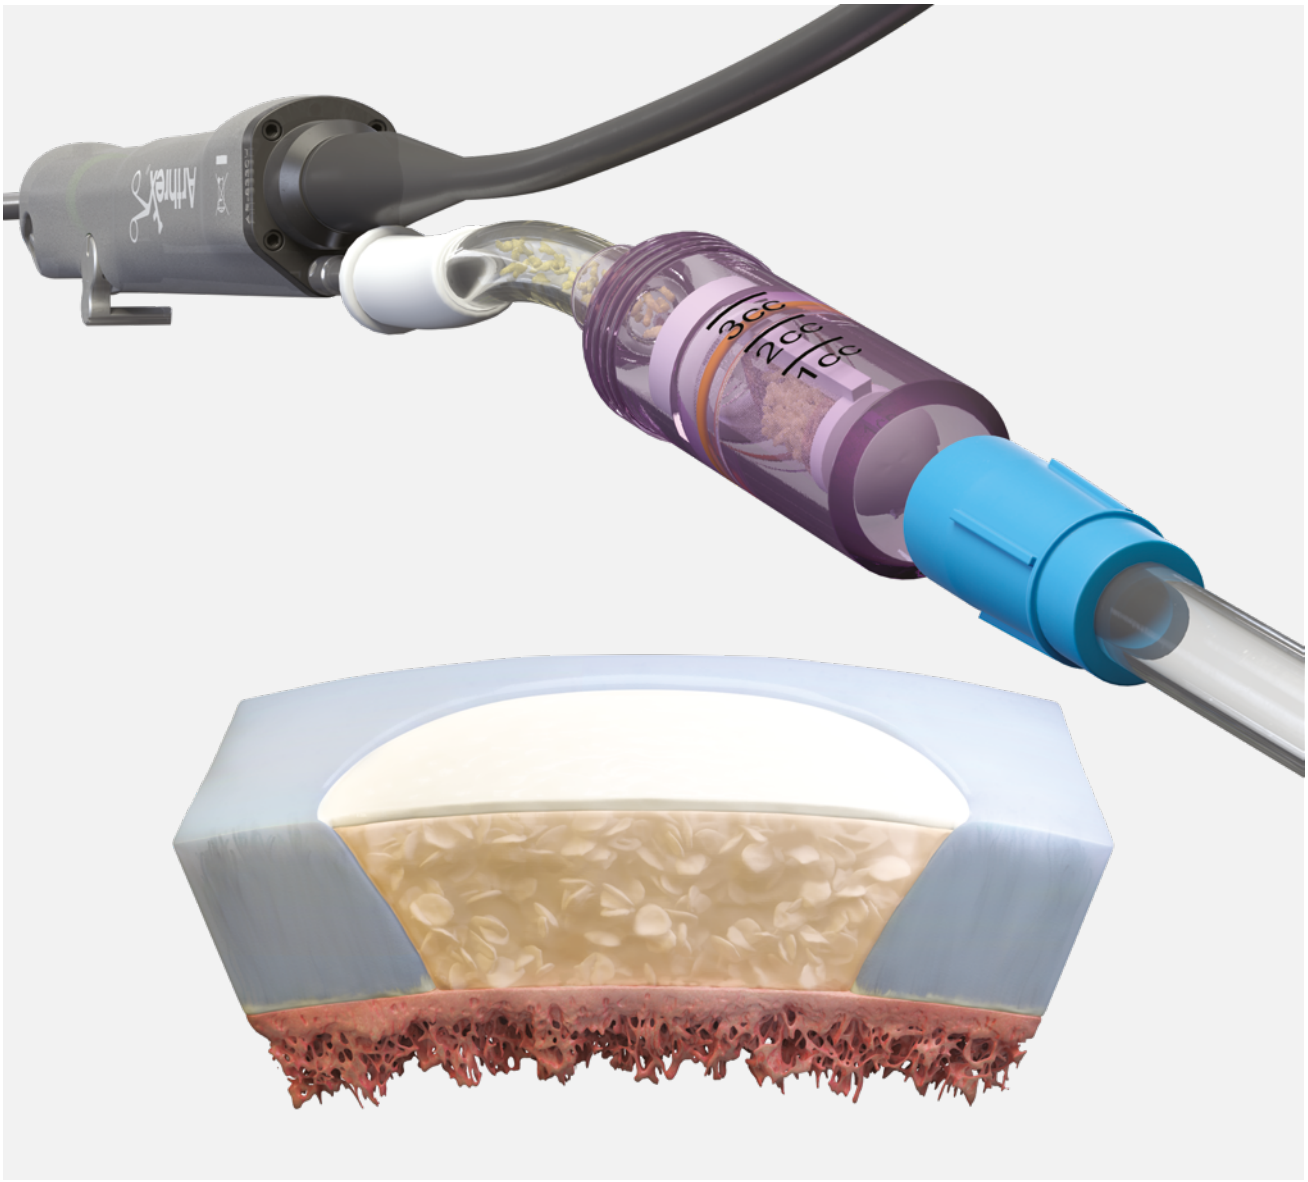

AutoCart describes the surgical procedure, where cartilage lesions are treated by using solely the patient´s own materials. With a SabreTooth shaver blade 3 or 4mm cartilage particulates are resected, collected in the GraftNet device and then transferred into a 1ml application syringe. After mixing with some PRP the particulates are applied into the lesion by using an application cannula and then fixed with an autologous thrombin solution produced by the Thrombinator device. At the end the whole construct is sealed with an additional layer of a PRP/Thrombin mix.

Product description	Item number
Arthrex ACP® Double Syringe System	
Arthrex ACP® double syringe	ABS-**10014**
Arthrex ACP® kit, series I	ABS-**10011**
Drucker Centrifuge	
6-tube horizontal general purpose centrifuge (human use)	HORIZON **24**-AH
Hettich Centrifuge	
Centrifuge, Hettich Rotofix 32 A, with swing out rotor, 220 V	**1206**-Art
Centrifuge, Hettich Rotofix 32 A, with swing out rotor, 110 V	**1206-01**-Art
Tubes, for Hettich Rotofix 32 A	**1491**
Screw cap, for Hettich tubes	**1492**
Counterweight, for centrifugation of Arthrex ACP® double syringe, 15 ml	ABS-**10027**
Thrombinator™ System	
Thrombinator™ system	ABS-**10080**
GraftNet™	
GraftNet™ autologous tissue collector	ABS-**1050**
Shaver Blades	
Sabre, shaver blade, 3 mm × 7 cm	AR-**7300SR**
Bone cutter, 3.8 mm × 13 cm	AR-**8380BC**
Accessories	
Tuohy insertion needle, curved, with obturator	ABS-**1001**

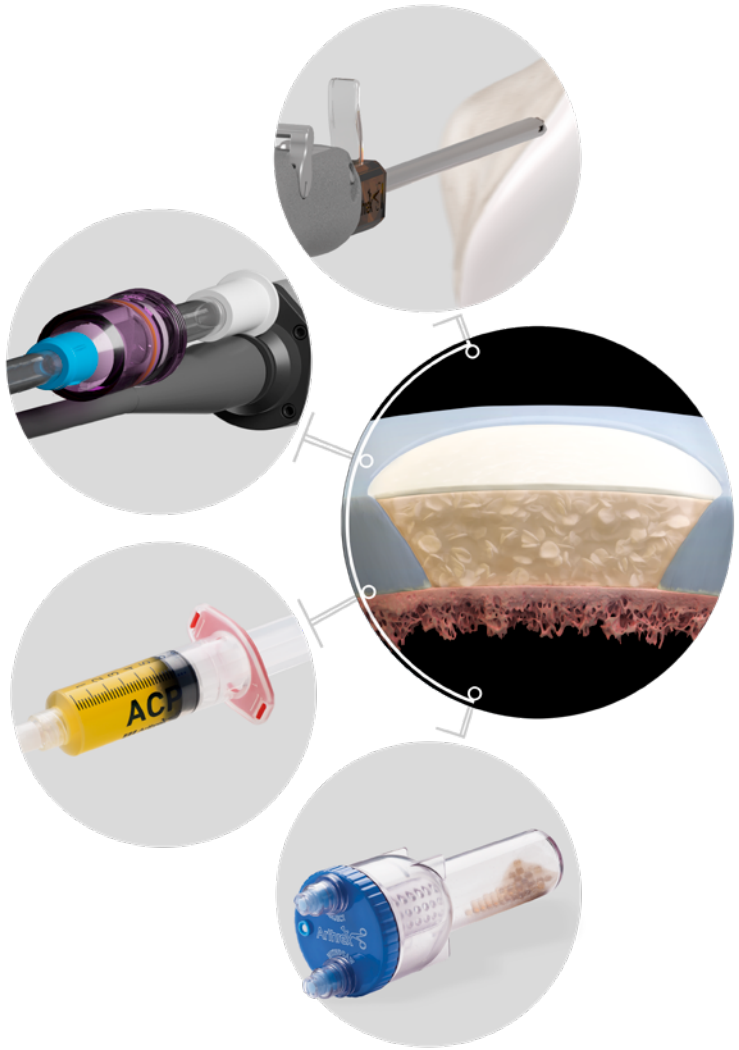

Osteochondral Repair

Marrow Stimulation 98

PowerPick™ Microfracture Instruments 98

IntraOsseous BioPlasty® 99

Chondral Dart™ Implant 100

Osteochondral Flap Repair System 100

3 mm Bio-Compression Screw 101

Marrow Stimulation



These angled chondro picks are designed to perforate the surface of osteochondral defects. Tips hardened with titanium nitride provide visual 3 mm depth control during defect perforation. Delrin endcaps permit use of a mallet to assist in perforation.

Chondro Pick Kit (AR-1760S)

Product description	Item number
Chondro pick, 20˚	AR-**1761**
Chondro pick, 40˚	AR-**1762**
Chondro pick, 60˚	AR-**1763**
Chondro pick, 25˚, curved tip	AR-**1764**
Chondro pick, 35˚, curved tip	AR-**1765**
Chondro pick instrument case	AR-**1766**


PowerPick™ Microfracture Instruments



The PowerPick and PowerPick XL, which were developed for the APS II shaver system, provide a fast and easy method for performing microfracture procedures. The PowerPick has a drill depth of 4 mm and the PowerPick XL's drill depth is 6 mm. All PowerPick versions have a working length of 13 cm and a drill diameter of 1.5 mm. The PowerPick is available with tip angles of 30 and 45 degrees, while the PowerPick XL features a 45-degree tip angle.

Product description	Item number
PowerPick™ microfracture instruments, 30°	AR-**8150PP-30**
PowerPick™ microfracture instruments, 45°	AR-**8150PP-45**
PowerPick™ XL, 45˚, Ø1.5 mm × 13 cm	AR-**8150PX-45**
APS II Shaver System	
APS II console	AR-**8300**
APS II footswitch, standard	AR-**8310**
APS II shaver handpiece, with foot control	AR-**8330F**
APS II shaver handpiece, hand-controlled	AR-**8330H**
Optional	
APS II multifunction footswitch, wireless	AR-**8315**
APS II multifunction footswitch, corded	AR-**8315C**

IntraOsseous BioPlasty®

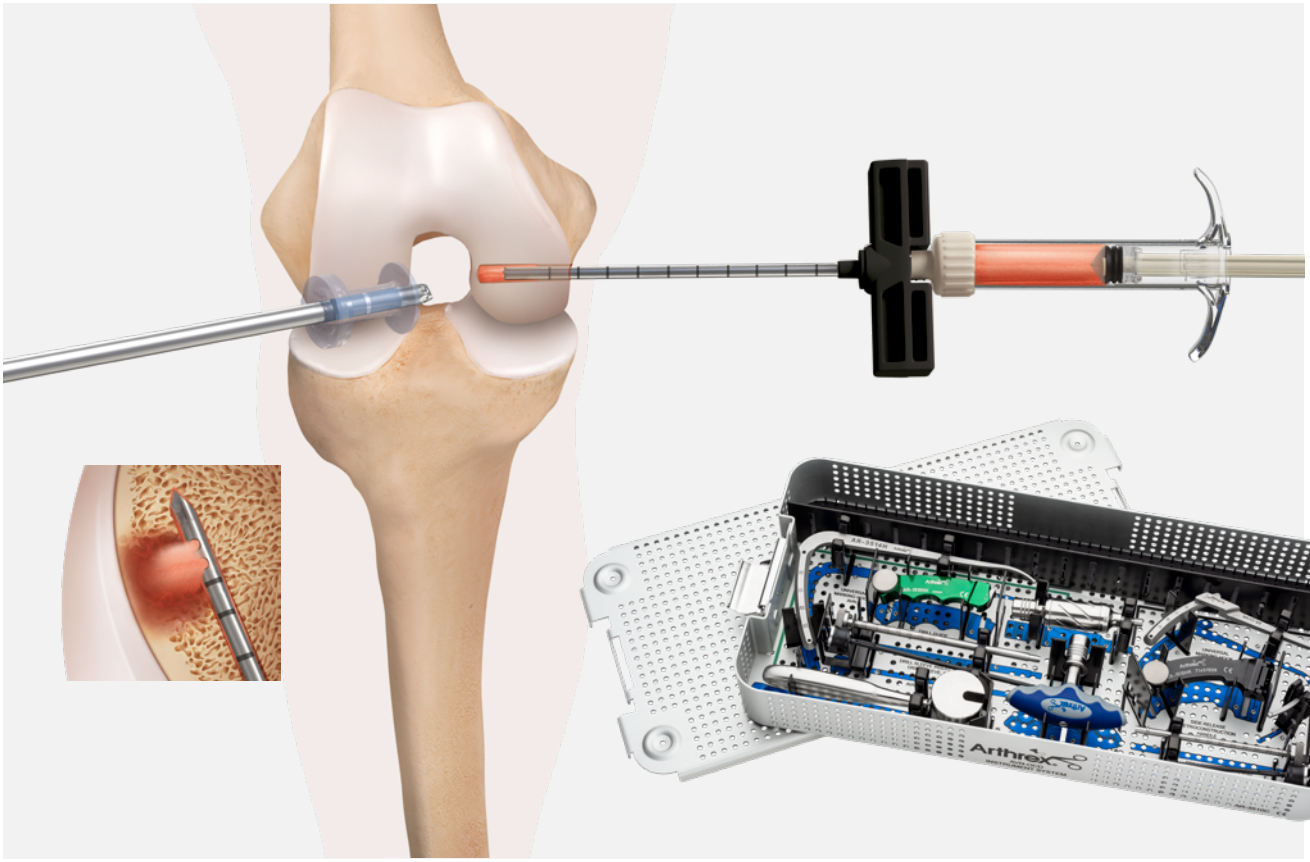

The IntraOsseous BioPlasty (IOBP) procedure is a biologic treatment for bone pathologies resulting from acute or chronic injury, including bone marrow lesions associated with insufficiency fracture, osteoarthritis, persistent bone bruises, avascular necrosis, and osteonecrosis. Arthrex offers multiple options for the biologic treatment of these pathologies, including decompressing the lesion and the delivery of a concentrated dose of platelet-rich plasma concentrate from bone marrow aspirate (cPRPBMA) using the Angel cPRP and bone marrow processing system. The IOBP technique is intended to encourage physiologic bone remodeling and repair to achieve normal bone anatomy and function.

Product description	Item number
Knee OCD disposables kit	AR-**3519K**
Delivery needle, open tip, 8 G × 11 cm	RAN-**811-OT**
Delivery needle, closed tip, 8 G × 11 cm	RAN-**811-CT**
Delivery needle, open tip, 8 G × 15 cm	RAN-**815-OT**
Anticoagulant ACD-A 20 ml	SAAV**222.G00**
Arthrex ACP® double-syringe system	ABS-**10014**
Angel® system	ABS-**10066**
AVN-OCD Instrument Set	AR-**3510S**
Universal marking hook, OCD	AR-**3514K**
Drill sleeve, OCD	AR-**3515K**
Drill sleeve insert, OCD	AR-**3516K**
Obturator, blunt tip, OCD	AR-**3515KD**
T-handle	AR-**623-37**
Torque adapter	**G207163**
RetroConstruction™ handle, side-release	AR-**1510HR**
Slotted mallet	AR-**9231-21**
AVN/OCD instrument case	AR-**3510C**

Chondral Dart™ Implant



The bioabsorbable PLLA Chondral Dart has a unique, double-reversed barbed design to facilitate fixation and compression of osteochondral flap tears up to 2 cm in diameter. The 18 mm long, 1.3 mm diameter Chondral Dart provides secure fixation under the hyaline cartilage surface, eliminating contact with sensitive articulating surfaces. Chondral Darts are an ideal complement to Bio-Compression screws for larger osteochondral defects. The placement instruments are included in the osteochondral flap repair system.

Product description	Item number
Chondral Dart™, 1.3 mm × 18 mm, sterile, qty 5	AR-**4005B-18**

Osteochondral Flap Repair System



These instruments compress osteochondral fragments when inserting darts below the surface of the articular cartilage for strong, bioabsorbable fixation of smaller osteochondral flaps of 5-20 mm in diameter. Depending on the size of the defect, either a single or multi-shot instrument can be used.


Osteochondral Flap Repair Single-Shot Kit

Product description	Item number
Single-shot sheath, for osteochondral flap repair Single-shot dart inserter, for osteochondral flap repair Single-shot drill, for osteochondral flap repair Cannula, for osteochondral flap repair	AR-**4009S**

Osteochondral Flap Repair Multi-Shot Kit

Product description	Item number
Single-shot sheath, for osteochondral flap repair Single-shot dart inserter, for osteochondral flap repair Single-shot drill, for osteochondral flap repair Cannula, for osteochondral flap repair Guide pin, for osteochondral flap repair Guide sleeve, 2-hole, for osteochondral flap repair Guide sleeve, 4-hole, for osteochondral flap repair Guide pins, for osteochondral lap repair, S, M, L, and XL	AR-**4095S**

3 mm Bio-Compression Screw

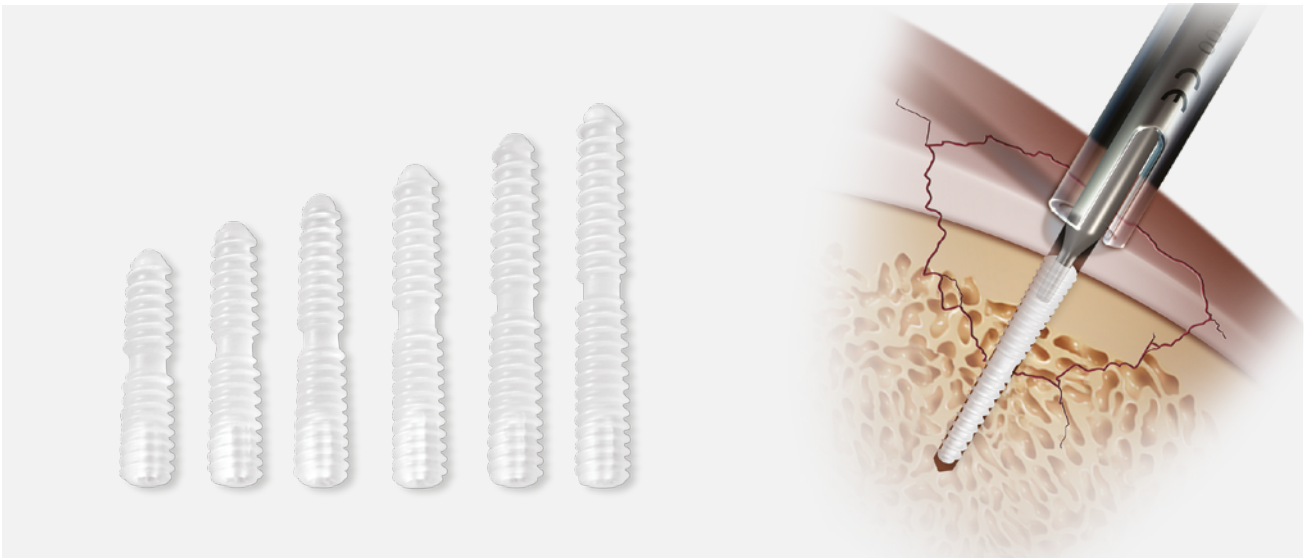

For fracture and osteotomy fixation in periarticular applications, this screw offers interfragmentary compression and a headless profile.

3 mm Bio-Compression Screw Instrumentation Set (AR-5025S)

Product description	Item number
Bio-Compression screwdriver, noncannulated, 2.7 mm	AR-**5025DB**
Small handle, with AO connection	AR-**2001AOT**
Bio-Compression screw dilator tap, 20 mm	AR-**5025TB**
Bio-Compression screwdriver guide, 20 mm	AR-**5025G**
Bio-Compression screw drill bit, 20 mm	AR-**5025TD**
Bio-Compression dilator tap, cannulated, 16 mm	AR-**5025TBC-16**
Bio-Compression dilator tap, cannulated, 18 mm	AR-**5025TBC-18**
Bio-Compression dilator tap, cannulated, 20 mm	AR-**5025TBC**
Bio-Compression dilator tap, cannulated, 22 mm	AR-**5025TBC-22**
Bio-Compression dilator tap, cannulated, 24 mm	AR-**5025TBC-24**
Bio-Compression dilator tap, cannulated, 26 mm	AR-**5025TBC-26**
Bio-Compression screw drill bit, cannulated, 16 mm	AR-**5025TDC-16**
Bio-Compression screw drill bit, cannulated, 18 mm	AR-**5025TDC-18**
Bio-Compression screw drill bit, cannulated, 20 mm	AR-**5025TDC**
Bio-Compression screw drill bit, cannulated, 24 mm	AR-**5025TDC-24**
Bio-Compression screw drill bit, cannulated, 26 mm	AR-**5025TDC-26**
Bone-reduction forceps, with teeth	AR-**4160FT**
Depth device, cannulated	AR-**5025DG**
Bio-Compression screw instrumentation case	AR-**5025C**

Implants (Noncannulated)

Product description	Item number
Bio-Compression screw, 3-3.7 mm × 16 mm	AR-**5025B-16**
Bio-Compression screw, 3-3.7 mm × 18 mm	AR-**5025B-18**
Bio-Compression screw, 2.7-3.7 mm × 20 mm	AR-**5025B-20**
Bio-Compression screw, 3-3.7 mm × 22 mm	AR-**5025B-22**
Bio-Compression screw, 3-3.7 mm × 24 mm	AR-**5025B-24**
Bio-Compression screw, 3-3.7 mm × 26 mm	AR-**5025B-26**
Disposable	
Guide wire, with trocar tip, 1.1 mm	AR-**5025K***
Optional	
Bio-Compression screw instrumentation case	AR-**5025C**

* Necessary for procedure; order separately.

Osteochondral Transplant

Single-Use OATS® System 104
Retrograde OATS™ System 105
Bone Graft Harvesting From the Iliac Crest 105

Single-Use OATS® System



The sterile, single-use Osteochondral Autograft Transfer System (OATS) facilitates harvesting of 6, 8, and 10 mm osteochondral / hyaline cartilage cylinders from a donor site superior and lateral to the notch or above the sulcus terminalis. Create a recipient socket, sized to the appropriate depth, in the chondral defect to accept the donor graft. The bone cylinder can be visualized through the clear graft delivery tube while it is inserted with the collared pin delivery system for press-fit fixation. The completely disposable, size-specific system includes: Recipient harvester, donor harvester, alignment rod, tamp, graft delivery tube, core extruder for controlled push-in core insertion, and optional graft driver.

All of the system components are provided sterile, packaged in a rigid thermo-formed tray, and nestled in individual compartments.

Single-Use OATS® System

Product description	Item number
OATS® set, 4.75 mm, single-use	AR-**1981-04S**
OATS® set, 6 mm, single-use	AR-**1981-06S**
OATS® set, 8 mm, single-use	AR-**1981-08S**
OATS® set, 10 mm, single-use	AR-**1981-10S**

Optional

Product description	Item number
OATS® sizer/tamps set, 6, 8, and 10 mm (AR-1985S)	
Sizer/tamp, red, 6 mm	AR-**1985-06**
Sizer/tamp, purple, 8 mm	AR-**1985-08**
Sizer/tamp, black, 10 mm	AR-**1985-10**
OATS® sizer/tamps instrument case	AR-**1985C**

Retrograde OATS™ System



Rely on the retrograde OATS set to harvest precisely angled 8 and 10 mm osteochondral hyaline cartilage cylinders for resurfacing lesions in the tibial plateau and patella. Create an appropriately sized recipient tunnel retrograde to the lesion site. Measure the tunnel's articular surface and harvest the appropriate size and angle bone cylinder from a donor site above the sulcus terminalis. Exchange the cylinder from 1 donor harvester to another, enabling the bone cylinder to be implanted into the recipient tunnel, leading with the articular surface. Gently extrude the bone cylinder into the recipient tunnel slightly countersunk to the articular surface. Use a bioabsorbable interference screw to achieve final flush seating and backup to the press-fit fixation.

The size-specific system includes 2 single-use OATS harvesters; collared pins in 10°, 20°, and 30° angles; bone core exchange tube; guide pin; size-specific cannulated drills; and core extruder.

All system components are provided sterile, packaged in a rigid thermoformed tray, and nestled in individual compartments.

Retrograde OATS™ Set, 10 mm (AR-1982-10S)

Product description	Item number
OATS® marking hook	AR-**1510M**

Bone Graft Harvesting From the Iliac Crest




The single-use bone graft harvester set comprises a 6, 8, or 10 mm-diameter bone graft harvester, a punch, and a twist knob. The system is used for the minimally invasive harvesting of bone from the iliac crest for preparation as bone-filling material for opening osteotomies.

Product description	Item number
Bone graft harvester, 6, 8, and 10 mm	AR-**1981-06H** to -**10H**

Osteotomies

PEEKPower™ HTO and LDFO Plates 108
Titanium HTO and LDFO Plates 110
iBalance® HTO Implants and Anchors 112
Osteotomy – Fracture Management 113
Hinge Pin Instrumentation With Extramedullar Guide 113
INNOTERE Paste-CPC 114
INNOTERE 3D Scaffolds 114

PEEKPower™ HTO and LDFO Plates

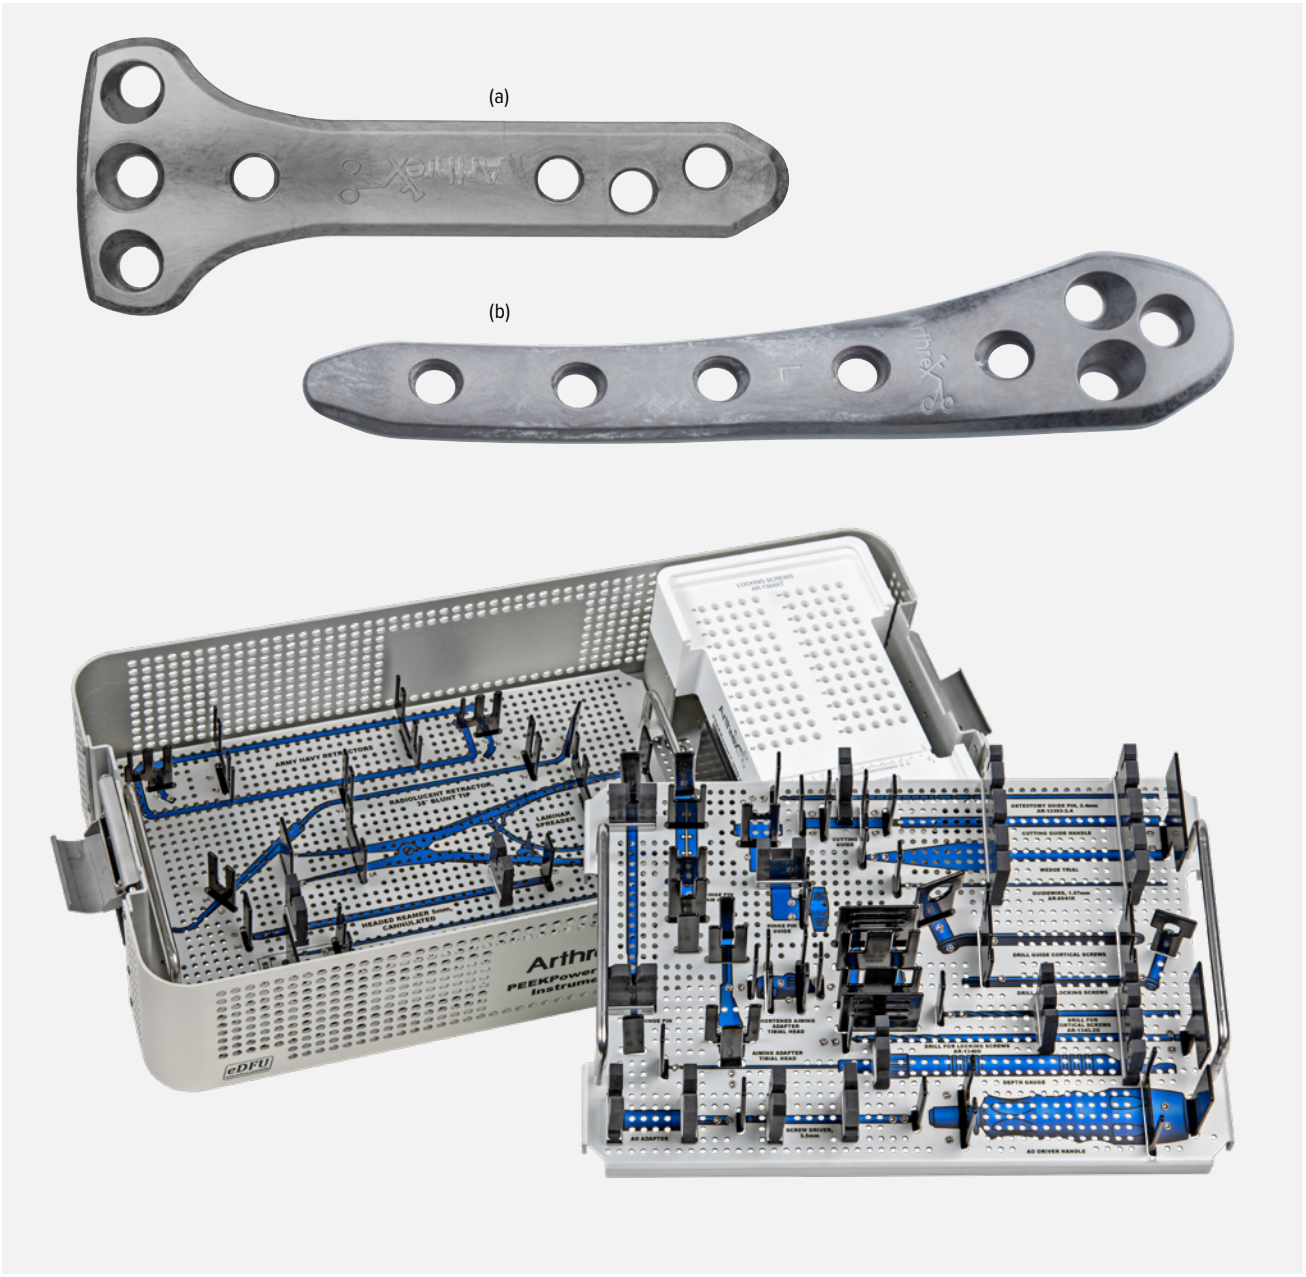

PEEK (polyetheretherketone) as a high-performance polymer unites high mechanical stability and stiffness with excellent biocompatibility. The use of PEEK in combination with endless carbon and tantal fibers in a fiber composite leads to revolutionary mechanical properties with higher long-term stability The PEEKPower osteotomy plates are fixed to the bone with titanium screws.

PEEKPower offers the possibility to angle the locking screws up to 24° followed by subsequent fixation of the screw head in the plate. Resterilizable x-ray templates of the plates facilitate the positioning of the plates before the implants are unpacked.

Implants and Screws

Product description	Item number
Plates	
PEEKPower™ HTO plate **(a)** PEEKPower™ LDFO plate, left PEEKPower™ LDFO plate, right **(b)**	AR-**13401L** AR-**13402L** AR-**13402R**
Screws	
PEEKPower™ osteotomy locking screws, 5 mm × 16-90 mm Length: 16, 20, 24, 26, 28, 30, 32, 34, 36, 40, 42, 44, 46, 48, 50, 55, 60, 65, 70, 75, 80, 85, 90 mm	AR-**13416T** to -**13490T**
PEEKPower™ HTO compression screw, 4.5 mm × 24-52 mm Length: 24, 28, 32, 36, 40, 44, 48, 52 mm	AR-**13524T** to -**13552T**
PEEKPower™ HTO locking screw, 5 mm × 16-90 mm, sterile Length: 16, 20, 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 55, 60, 65, 70, 75, 80, 85, 90 mm	AR-**13416TS** to -**13490TS**
PEEKPower™ cortical screw, nonlocking, 4.5 mm × 24-52 mm, sterile Length: 24, 28, 32, 36, 40, 44, 48, 52 mm	AR-**13524TS** to -**13552TS**
Templates	
PEEKPower™ template, HTO plate PEEKPower™ template, LDFO plate, left PEEKPower™ template, LDFO plate, right	AR-**13401LT** AR-**13402LT** AR-**13402RT**

Instrument Set for PEEKPower™ HTO Plate (AR-13421S)


Product description	Item number
Osteotome, 10-25 mm Width: 10, 15, 20, 25, 30 mm	AR-**13421W-10** to -**30**
Bone spreader, for HTO Aiming adapter, tibial head Shortened aiming adapter tibial head	AR-**1340T** AR-**1340DGA** AR-**1341DGA**
Drill, for PEEKPower™ HTO locking screws, Ø4.3 mm Drill guide, for PEEKPower™ HTO plate locking screws Depth gauge, for PEEKPower™ HTO plate Drill, for cortical screws, Ø3.2 mm Drill guide, for cortical screws	AR-**1340D** AR-**1340DG** AR-**1340G** AR-**1343.2D** AR-**1343DG**
Screwdriver, for PEEKPower™ HTO plate Driver handle, AO connection Bone block template, for opening wedge osteotomy Trial wedge, for opening wedge osteotomy AO adapter, cannulated	AR-**13435D** AR-**13421AO** AR-**13315** AR-**13324** AR-**4160AOC**
Osteotomy guide pin, 2.4 mm Guide wire, with trocar tip, 1.57 mm Retractor, radiolucent	AR-**13303-2.4** AR-**8941K** AR-**13311**
PEEKPower™ HTO DFO instrument case	AR-**13421C**
Hinge Pin Instrumentation	
HTO hinge pin set Template, HTO hinge pin Extramedullary instruments Case, for EM instruments	AR-**13315S** AR-**13330** AR-**13440-01** / -**02** AR-**13330C3**

Saw Blade for DrillSaw Max 600™

Product description	Item number
Thickness 1.27 mm, length 105 mm, width 19 mm	AR-**600-312S**
Thickness 1.27 mm, length 90 mm, width 25.4 mm	AR-**600-305S**
Thickness 1.27 mm, length 90 mm, width 13 mm	AR-**600-301S**
Thickness 0.8 mm, length 65 mm, width 18 mm	AR-**600-352S**
Thickness 0.6 mm, length 45 mm, width 9 mm	AR-**600-353S**

EM instrumentation works only in conjunction with iBalance arthroplasty instrumentation as follows: AR-623-30 / -31 / -32 / -33

Titanium HTO and LDFO Plates

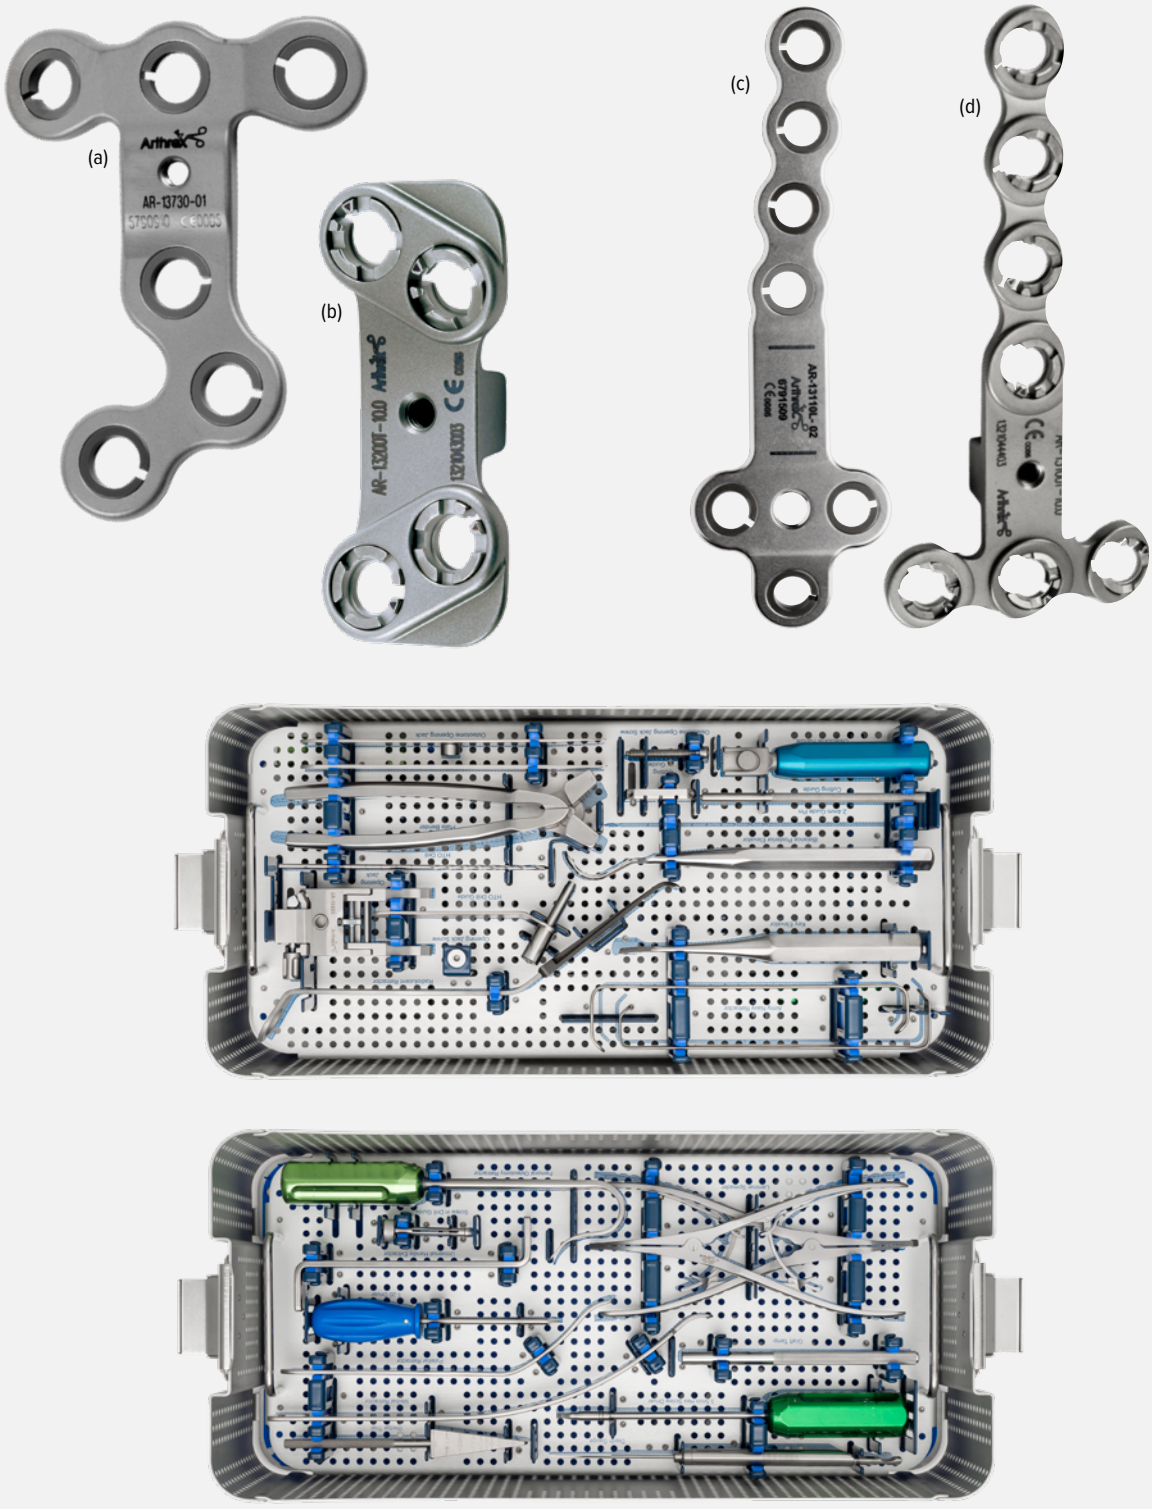

The ContourLockTM plates are made of titanium and designed for an opening wedge osteotomy of the medial proximal tibia and the lateral distal femur. The plates come with clamping rings that combine a variable angle screw placement with a locking mechanism. 6.5 mm cancellous screws and 4.5 mm cortical screws provide a stable internal fixation system. The comprehensive ContourLockTM instrument set provides all relevant tools to complete the HTO and LDFO procedure.


Implants and Screws

Product description	Item number
HTO Plates	
ContourLock™ HTO plate, flat, left, 67 mm **(a)**	AR-**13730-01**
ContourLock™ HTO plate, flat, left, 71 mm	AR-**13730-02**
ContourLock™ HTO plate, flat, left, 84 mm	AR-**13730-03**
ContourLock™ HTO plate, flat, right, 67 mm	AR-**13735-01**
ContourLock™ HTO plate, flat, right, 71 mm	AR-**13735-02**
ContourLock™ HTO plate, flat, right, 84 mm	AR-**13735-03**
Tibial opening wedge osteotomy plates, 5-17.5 mm	AR-**13200T-05** to -**17.5**
Tibial A/P sloped osteotomy plates, 5-17.5 mm **(b)**	AR-**13200ST-05** to -**17.5**
LDFO Plates	
ContourLock™ LDFO plate, right, small/medium **(c)**	AR-**13110R-01**
ContourLock™ LDFO plate, right, large/extra large	AR-**13110R-02**
ContourLock™ LDFO plate, left, small/medium	AR-**13110L-01**
ContourLock™ LDFO plate, left, large/extra large	AR-**13110L-02**
Femoral Opening Wedge Osteotomy Plates, 5-17.5 mm **(d)**	AR-**13100T-05**.0 to -17.**5**
Screws	
Cancellous screws, for HTO plate, 6.5 mm × 35-70 mm Length: 35, 40, 45, 50, 55, 60, 65, 70 mm	AR-**13280-35** to -**70**
Cortical screws, for HTO plate, 4.5 mm × 26-60 mm Length: 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52, 54, 56, 58, 60 mm	AR-**13380-26** to -**60**
Low-profile locking screw for LDFO plate, 4.5 mm × 18-75 mm	AR-**8545L-18** to -**75**

Instrument Set for Titanium Plates (AR-13330S)

Product description	Item number
All Sets Include a Handle for Osteotomes, Disposable Blades Available Separately	
Osteotome blade, flexible, 10 mm	AR-**13302F-10**
Osteotome blade, flexible, 25 mm	AR-**13302F-25**
Osteotome blade, flexible, 35 mm	AR-**13302F-35**
Multiple-Use Osteotomes	
Osteotome blade, 10 mm	AR-**13421W-10**
Osteotome blade, 15 mm	AR-**13421W-15**
Osteotome blade, 20 mm	AR-**13421W-20**
Osteotome blade, 25 mm	AR-**13421W-25**
Osteotome blade, 30 mm	AR-**13421W-30**
Additional Instruments (Not Part of the Set)	
AO osteotomy wedge	AR-**13300**
AO guide pin, 3 mm	AR-**13303-3.0**
AO parallel guide positioning instrument	AR-**13304-1**
Guide sleeve, for parallel pin	AR-**13304-2**
AO C-ring drill guide	AR-**13305**
AO cutting guide	AR-**13306-01**
AO fixation pin, for cutting guide	AR-**13306-02**
Alignment rod, for axial determination	AR-**13308**
Application instrument, for opening wedge osteotomy plate	AR-**13318**
Universal plate bending pliers, for osteotomy plates	AR-**13322-02**
Osteotomy jack callipers	AR-**13323G**
Measuring device, for osteotomy plates, L, with A/P slope	AR-**13325L**
Measuring device, for osteotomy plates, S, with A/P slope	AR-**13325S**
Screwdriver, 90°, 3.5 mm hex	AR-**13326-90**
Screwdriver, 3.5 mm hex	AR-**13326**
Accessories (Optional, Not Included in the Set)	
Handle, ratcheting, AO connection	AR-**8950RH**
Anchor drill, AO connection	AR-**13434-02**
Graft tamp	AR-**13432**
Cobb elevator	AR-**13411-01**
Osteotomy jack, 35 mm	AR-**13323-35**

iBalance® HTO Implants and Anchors

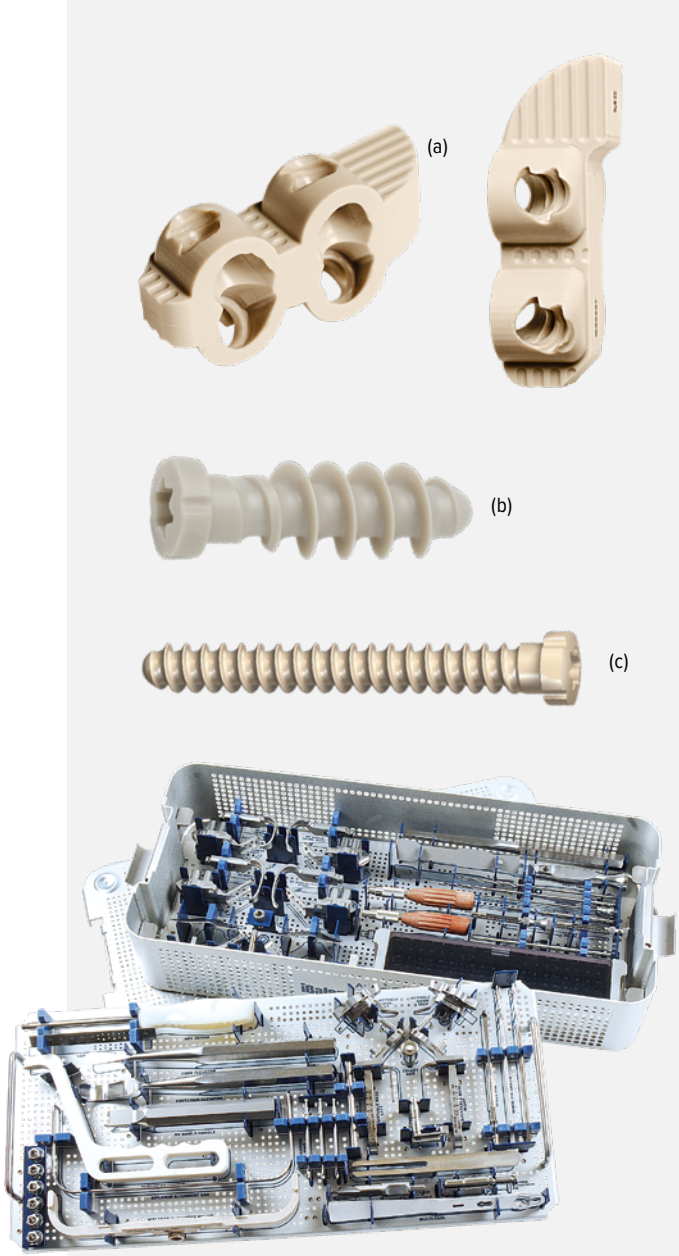

Product description	Item number
iBalance® Implants	
iBalance® HTO implant, SM 12° **(a)**	AR-**13400S-12**
iBalance® HTO implant, SM 6° / MD 5°	AR-**13400M-05**
iBalance® HTO implant, SM 7° / MD 6°	AR-**13400M-06**
iBalance® HTO implant, SM 8° / MD 7°	AR-**13400M-07**
iBalance® HTO implant, SM 9° / MD 8°	AR-**13400M-08**
iBalance® HTO implant, SM 10° / MD 9°	AR-**13400M-09**
iBalance® HTO implant, SM 11° / MD 10°	AR-**13400M-10**
iBalance® HTO implant, SM 13° / MD 11°	AR-**13400M-11**
iBalance® HTO implant, SM 14° / MD 12°	AR-**13400M-12**
iBalance® HTO implant, SM 15° / MD 13°	AR-**13400M-13**
iBalance® HTO implant, MD 14°	AR-**13400M-14**
iBalance® HTO implant, MD 15°	AR-**13400M-15**
iBalance® HTO implant, LG 5°	AR-**13400L-05**
iBalance® HTO implant, LG 6° / XL 5°	AR-**13400L-06**
iBalance® HTO implant, LG 7° / XL 6°	AR-**13400L-07**
iBalance® HTO implant, LG 8° / XL 7°	AR-**13400L-08**
iBalance® HTO implant, LG 9° / XL 8°	AR-**13400L-09**
iBalance® HTO implant, LG 10° / XL 9°	AR-**13400L-10**
iBalance® HTO implant, LG 11° / XL 10°	AR-**13400L-11**
iBalance® HTO implant, LG 12° / XL 11°	AR-**13400L-12**
iBalance® HTO implant, LG 13° / XL 12°	AR-**13400L-13**
iBalance® HTO implant, LG 14° / XL 13°	AR-**13400L-14**
iBalance® HTO implant, LG 15° / XL 14°	AR-**13400L-15**
iBalance® Anchors	
iBalance® HTO anchor, cancellous bone, 20-32 mm Length: 20, 22, 24, 26, 28, 30, 32 mm **(b)**	AR-**13401-20** to -**32**
iBalance® anchor HTO, cortical bone, 24-52 mm Length: 24, 26, 28, 30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50, 52 mm **(c)**	AR-**13402-24** to -**52**
Specific Instruments	
iBalance® instrument case	AR-**13400C**
Tibial osteotomy toolbox case	AR-**13330C2**
Driver handle, cannulated, with AO connection	AR-**13221AOC**
HTO retractor, radiolucent	AR-**13310**
Bone block template, for opening wedge osteotomy	AR-**13315**
Steel rule, 120 mm	AR-**13410**
Fastener and lock washer	AR-**13413**
Hex driver	AR-**13415**
Keyhole drill guide, L	AR-**13417L**
Keyhole drill guide, M	AR-**13417M**
Alignment handle	AR-**13418**
Osteotome, 10-25 mm Width: 10, 15, 20, 25, 30 mm	AR-**13421W-10** to -**30**
Keyhole reamer	AR-**13425**
Keyhole provisional pin	AR-**13426**
iBalance® anchor drill guide	AR-**13433**
Drill, for iBalance® anchor, chuck connection	AR-**13434-01**
Drill, for iBalance® anchor, AO connection	AR-**13434-02**
iBalance® anchor depth gauge	AR-**13435**
iBalance® anchor tap guide	AR-**13436**
Cortical bone tap, for iBalance® anchor, 4.5 mm	AR-**13437**
iBalance® anchor driver	AR-**13439**
AO adapter, cannulated	AR-**4160AOC**

The iBalance HTO system consists of nonabsorbable polyetheretherketone (PEEK) implants and anchors that are inserted in the osteotomy wedge to fix and maintain the medially opening proximal tibial osteotomy during HTO procedures. This system offers an alternative option to traditional metal plates and screws. The iBalance HTO implants and anchors remain in the bone, which is why in some cases second surgical procedures for implant removal due to overlying soft tissue irritation can be avoided. The implantation can be completed with a guided instrument set (AR-13400S) or in a Free-Cut technique. To promote bone healing and provide added stability, the suggested bone substitutes are Innotere osteotomy wedges (721TS1 to 721TS4).


Osteotomy – Fracture Management




This 2-pilot hole plate is the perfect support for a fractured lateral tibial cortex during HTO procedures as well as supporting the anteromedial tibial cortex during slope-changing HTO procedures. The plate can easily be slightly bent to conform to variations in bone anatomy using universal bending irons from the opening wedge osteotomy system set. It is fixed to the bone with 4 mm × 30 mm titanium cancellous screws.

Product description	Item number
Osteotomy support plate implant system, 2 pilot hole	AR-**13215**
iBalance® HTO instrument set	AR-**13400S**

Hinge Pin Instrumentation With Extramedullar Guide

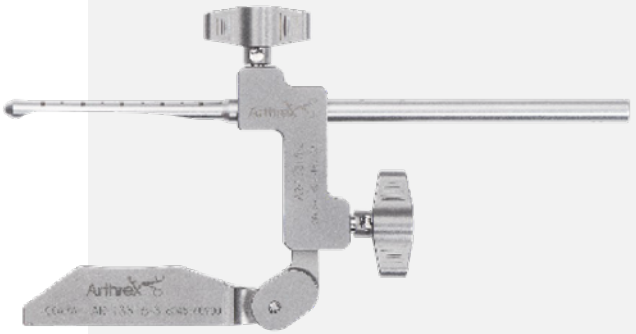

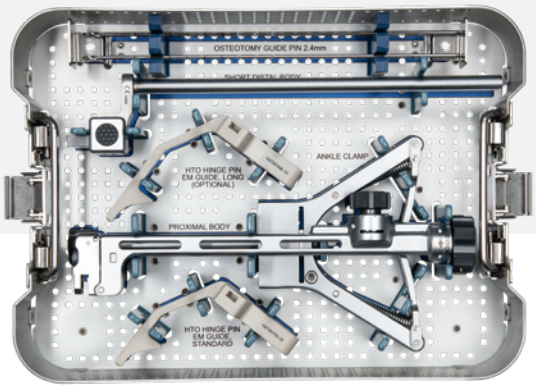


The HTO hinge pin system offers a solution for any HTO system, regardless of the type of osteotomy, uniplanar or biplanar. The system offers:

- Determination of the endpoint of the osteotomy
- Saw cutting guide with lateral stop
- Reduced risk of fracture when folding open the osteotomy wedge

Guide pins with predetermined breakaway facilitate determination of the osteotomy plane.

Product description	Item number
HTO hinge pin set	AR-**13315S**
X-ray template, HTO hinge pin	AR-**13330**
Osteotomy guide pin, 2.4 mm	AR-**13303-2.4**
Osteotomy guide pin, 3 mm, qty 6	AR-**13303-3.0**
Osteotomy guide pin, 2.4 mm, non-sterile, qty 1	AR-**13303-2.4-1**
Osteotomy guide pin, 2.4 mm, sterile, qty 1	AR-**13303-2.4-1S**
Osteotomy guide pin, 3 mm, non-sterile, qty 1	AR-**13303-3.0-1**
Osteotomy guide pin, 3 mm, sterile, qty 1	AR-**13303-3.0-1S**
EM tibial guide, ankle clampx	AR-**623-33**
EM tibial guide, proximal body	AR-**623-30**
EM tibial guide, short distal body	AR-**623-31**
HTO hinge pin EM guide	AR-**13440-01**
HTO hinge pin EM guide, large	AR-**13440-02**
HTO hinge pin EM guide case	AR-**13330C3**


INNOTERE Paste-CPC

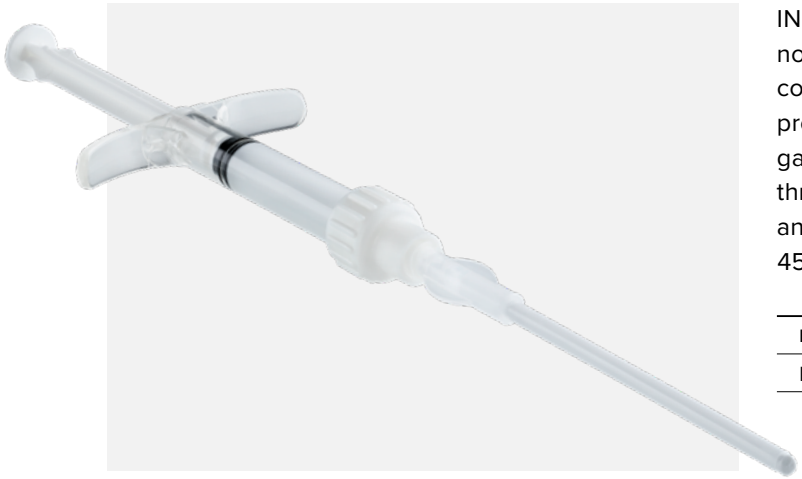

INNOTERE Paste-CPC consists of biominerals and a non-aqueous carrier fluid. A calcium phosphate cement, corresponding to the mineral phase of the bone, is produced by successive insertion into the osteotomy gap. The biomaterial provides structural support through the complete filling of the osteotomy wedge and has a compressive strength of approximately 45 MPa.

Product description	Item number
INNOTERE Paste-CPC, 3 ml	**111VX2**

INNOTERE 3D Scaffolds

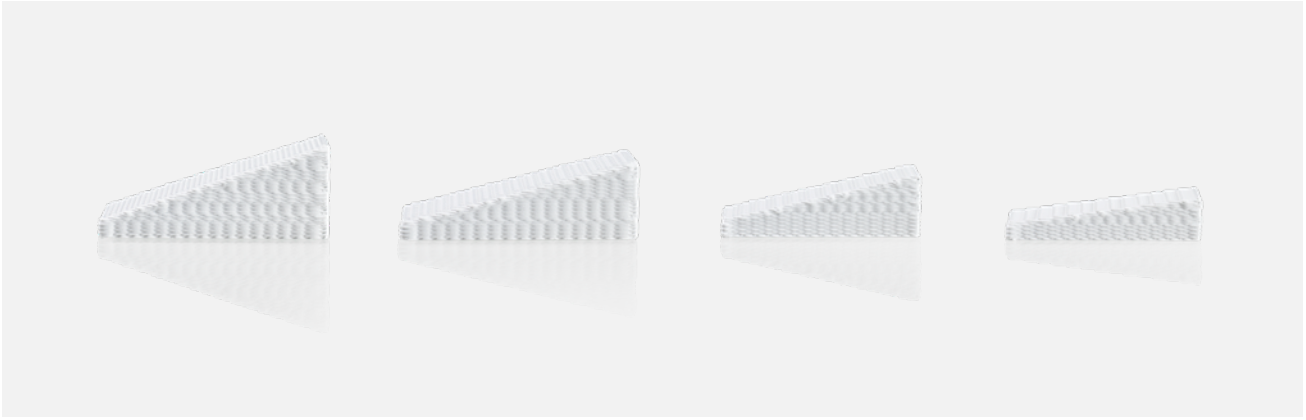

INNOTERE 3D Scaffold wedges consist of synthetically produced calcium phosphate that simulates the consistency of natural bone. These scaffolds offer a broad contact surface for opening osteotomies. They are radiolucent and can be combined with autologous fluids.

Product description	Item number
INNOTERE 3D Scaffold, for opening wedge osteotomy, 7 mm × 30 mm	**721TS1**
INNOTERE 3D Scaffold, for opening wedge osteotomy, 10 mm × 30 mm	**721TS2**
INNOTERE 3D Scaffold, for opening wedge osteotomy, 12 mm × 35 mm	**721TS3**
INNOTERE 3D Scaffold, for opening wedge osteotomy, 15 mm × 35 mm	**721TS4**



LEARN MORE!

More information

on the management of knee related fractures can be found in the Fracture Management brochure under Knee Indications:

- Patella SuturePlateTM II 3 mm System
- Patella Fracture



This description of technique is provided as an educational tool and clinical aid to assist properly licensed medical professionals in the usage of specific Arthrex products. As part of this professional usage, the medical professional must use their professional judgment in making any final determinations in product usage and technique. In doing so, the medical professional should rely on their own training and experience, and should conduct a thorough review of pertinent medical literature and the product's directions for use. Postoperative management is patient-specific and dependent on the treating professional's assessment. Individual results will vary and not all patients will experience the same postoperative activity level and/or outcomes.

arthrex.com

© 2026-01 Arthrex GmbH. All rights reserved. LB2-0115-EN_K

Arthrex **CE** conformity mark, Manufacturer, Authorized Representative, and Importer information.

US patent information